# I - CATALOG **COMPONENTS & MATERIALS**

Discover the unique integra mechatronic system



For an optimal navigation we advise you to save the catalog file on your computer and consult it with Acrobat Reader.

CURRENT VERSION: 20212505-EN-CATA-0010-PROTEOR 15/11/2023





2. The

Image: NEW PROTEOR SHOPImage: Shop-emear.proteor.com/en-int



#### I-CATALOG

We are very excited to present our brand new I-Catalog. Updated in real time, make sure you have the latest version by downloading it from our website. Let's keep in touch, you will be informed by email as soon as a new version is available.

To browse this I-Catalog offline, click anywhere on a page to browse our products (Next left button / Previous right button)

Quickly access a category using the horizontal menu, then click on the desired product in the list.

When related products are linked, click on the eye 👁 to go directly to the description.


At any time, when available, use the icons to download the IFU  $\square$  or documentation  $\blacksquare$  (login required).

If you have any questions, just click on the icon 🗊 to instantly send an e-mail to our customer service.

Consult the warranty conditions at any time by clicking on iggnedienteting

#### PICTOGRAMS

#### **Activity level**



Has the ability or potential to use a prosthesis for transfers or ambulation on level surfaces at fixed cadence.
Typical of the limited and unlimited household ambulator.

• Has the ability or potential for ambulation with the ability to traverse low level environmental barriers such as curbs, stairs or uneven surfaces.

• Typical of the limited community ambulator.

• Has the ability or potential for ambulation with variable cadence.

• Typical of the community ambulator who has the ability to traverse most environmental barriers and may have vocational, therapeutic, or exercise activity that demands prosthetic utilization beyond simple locomotion.



• Has the ability or potential for prosthetic ambulation that exceeds basic ambulation skills, exhibiting high impact, stress, or energy levels.

• Typical of the prosthetic demands of the child, active adult, or athlete.

#### Maximum weight



Our products are tested as regards the in force standards NF. EN. ISO 10328 and NF. EN. ISO 22523 to withstand the user's weight and activity.

By maximum weight we mean the user's body weight plus the weight of the prosthesis and any load carried by the user.


#### Water resistance



PROTEC








TH1

TH2

TH3

TH2

**Build Height Principle** 



Built Height (BH)



To guarantee the quality of its medical devices, PROTEOR has created the

**CERTITUDE** quality commitment, which is based on 6 key areas

The commitment was launched in 2023 and is based on up to 52 internal requirements for components manufactured by PROTEOR, it is re-evaluated each year within the Group



#### **Patient safety**

Patient file compliance, risk analysis and management, biocompatibility management, material vigilance, CE marking.



#### **Traceability** Control of medical device traceability (custom-fitted devices, components and manufacturing



#### Products quality Expertise, Know how

Manufacture and infrastructure management. Product compliance control. Professional skills management.



#### Supply control and management

Selection and evaluation of suppliers, incoming inspection, ethical purchasing.



## Quality of service

Patient follow up, after-sales service, quality of reception.



Monitoring customer satisfaction and complaints.



PROTEOR

**PROTEOR** is also committed to implementing a global CSR approach.

**To find out more** Go to proteor.com/quality-commitment Or scan the code





#### WE ARE PROTEOR

## The needs of patients are always changing; so is the need for innovative technology.

We understand the importance of the relationship between the end-user and their prosthetic componentry. It's because of this understanding that **PROTEOR** is in the constant pursuit of innovation with the best possible outcomes in mind.

Rooted in it's mantra for over 100 years, the **Proteor Group's** commitment to putting the **#HumanFirst** has led to the development of the most encompassing product portfolio in O&P.

Putting the **#HumanFirst**, we are excited to deliver an extensive, progressive product line that includes everything today's patient needs to LIVE THE LIFE THEY LOVE. Discover the exciting **PROTEOR** product line to-day!

A whole new look. A whole new vibe. A whole new world. We are **PROTEOR.** 



E-mail: cs@proteor.com



English, Spanish, Italian speaking



+ 33(0)3 80 78 42 08

- + 33(0)3 80 78 42 10
- + 33(0)3 80 78 42 85

Fax: + 33(0)3 80 78 42 15

Dutch, German speaking

+49 (0)69 96 21 76 604 Toll free: 00800-2806 2806

## French speaking

+ 33(0)3 80 78 42 30 Fax: + 33(0)3 80 78 42 15

www.proteor.com



## TABLE OF CONTENTS

Click on to access

#### SYNSYS

#### Knees

- Microprocessor knees
- Other knees

#### Ankles

- Microprocessor ankle
- Mechanical ankles

#### Feet

- Energy return carbon feet
- Sports blade
- Energy return glassfiber feet
- Geriatrics and low activity
- Foot Shells

#### Components

- Foot Adapter
- Tubes clamps & pylons
- Adapters
- Connectors
- Lamination adapter
- 4-hole adapter
- Cosmetics

## Liners & Sockets


- Silitouch tibial liners
- Liners
- Adjustable temporary socket
- Temporary fitting system
- Locks and valves

## Orthosis

- Ankle joints
- Knee joints
- Uprights
- Knee braces
- Spinal Orthosis

## Materials

- Casting
- Lamination
- Adhesive
- Thermoforming
- Lining and finishing
- Strap and buckle
- Screw Fitting
- Sublimation papers

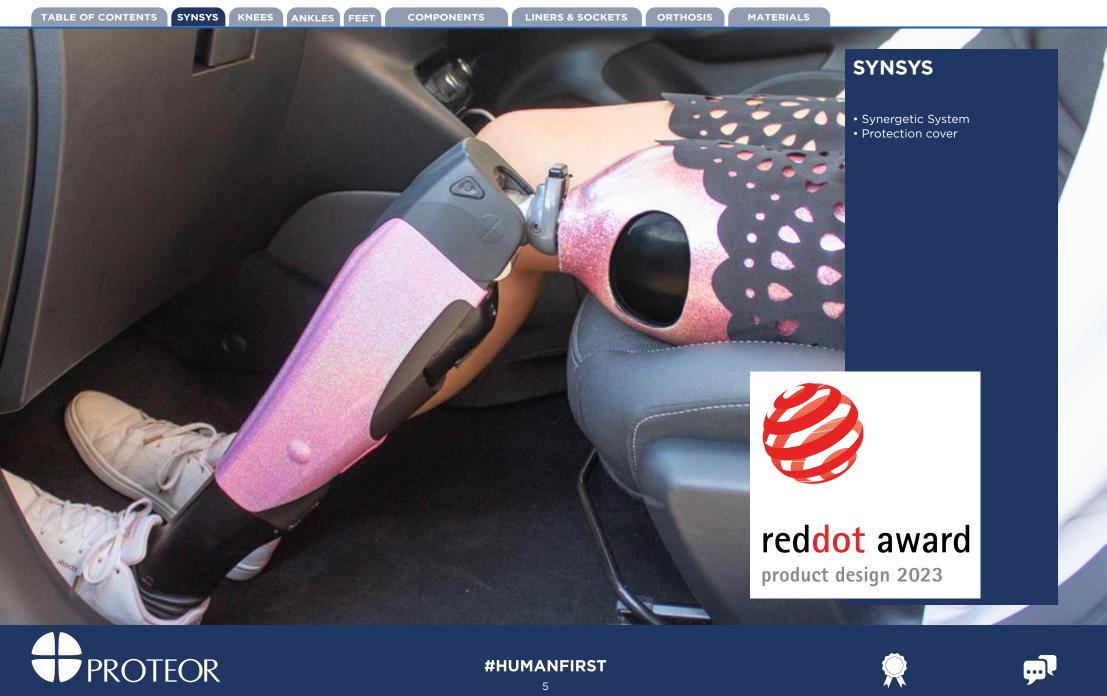

#### **#HUMANFIRST**

•••

SYNSYS

TABLE OF CONTENTS

KNEES ANKLES FEET

COMPONENTS



# reddot award product design 2023

## Regain Serenity SYNERGETIC SYSTEM - Controlled Kinematic Coupling

**SYNSYS** is a unique integral mechatronic system offering a kinematic coupling of the ankle and the knee movements, as a continuation of the hip.

This microprocessor-controlled solution was designed to facilitate everyday situations and allow the patient to gain peace of mind.

MATERIALS

- Bending the ankle for all everyday life movements such as sitting and squatting
- Putting the foot completely flat on the step when going down the stairs for more safety
- Feeling comfortable walking up and down slopes
- Changing shoes easily (barefoot + 9 programmable heel heights up to 5cm)
- Walking barefoot

## **PROTEOR will support you:**

- Free training
- Free certification kit for the O&P clinic with all the necessary tools
- Customized SYNSYS delivered set to length by PROTEOR teams
- Team of clinical trainers available at all times
- SYNSYS loaner available during servicing









TABLE OF CONTENTS SYNSYS KNEES ANKL	ES FEET COM	IPONENTS L	INERS & SOCKETS ORTHOSIS MATERIALS	<b>1 2 3 4 1 2 3 4 1 2 3 4 1 2 3 4 1 2 3 4 1 2 3 4 1 2 3 4</b>			
	Iten	ו N°.	1P700LEG				
	Training		Mandatory and free certification for CPOs				
W.	Packaging content		SYNSYS assembled solution, charger, on/off tool, instructions for use				
and the second s	Warranty		3 years - Paying option: 3-year more extension				
	Included servicing		1st service at 24 months / 2nd service at 48 months if extension subscribed				
	Proximal connector		Male Pyramid				
	Knee-to-ground height		From 430 to 550 mm				
	Sizes		23 to 30 cm				
	Footshell		Black, Caucasian or Brown				
	Maximum knee flexion		125°				
E11 320	Ankle joint		42° ROM				
	Weight		3.2 kg				
	Maximum patient weigh	nt	125 kg				
	Activity level		К3				
	Water resistance		IP54, weatherproof				
	Protection cover		23 colors available + 1 customisable				
	Autonomy		Lithium-ion Battery. The full charging time is 6 hours. SYNSYS has an energy management system, which provides more freedom to the user and requires charging only every few days. The battery life will vary with use.				
	Operating temperature		-10°C à 40°C				
		СРО	SYNSYS SOFT is available on iPad or Windows 10 and 11				
9	Software	Users	Smartphone Apps.	Download on the App Store			



reddot award product design 2023

	Foot category indication chart based on patient weight and activity										
Activity level 45 - 59 kg 99 - 130 lbs		60 - 1 s   131 - 1	74 kg 163 lbs	75 - 89 kg 164 - 196 lbs	90 - 104 kg 197 - 229 lbs		105 - 125 kg 230 - 275 lbs				
Norr	nal	1	:	2	3	4			5		
Hig	jh	2	;	3	4	5					
	Availability of modules per Foot Shell size										
Module	23	24	24 25 26 27 28					)	30		
1											
2	2										
3											
4											
5											




Not suitable for bilateral femoral or disarticulated hip amputees








PROTEOR

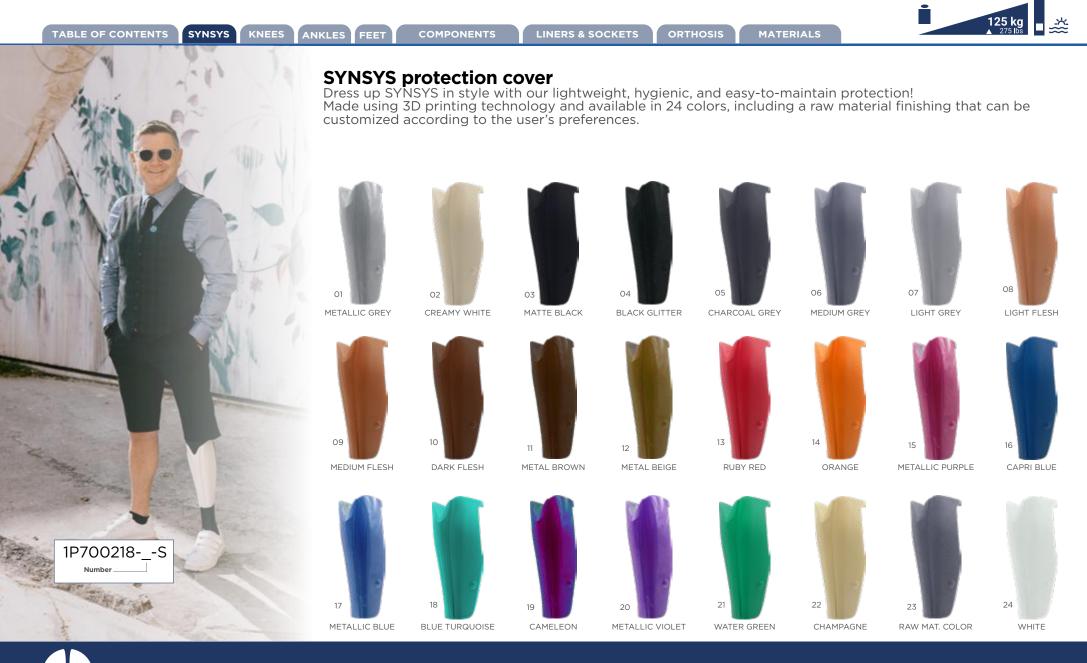

ين 1P54

# KNEes

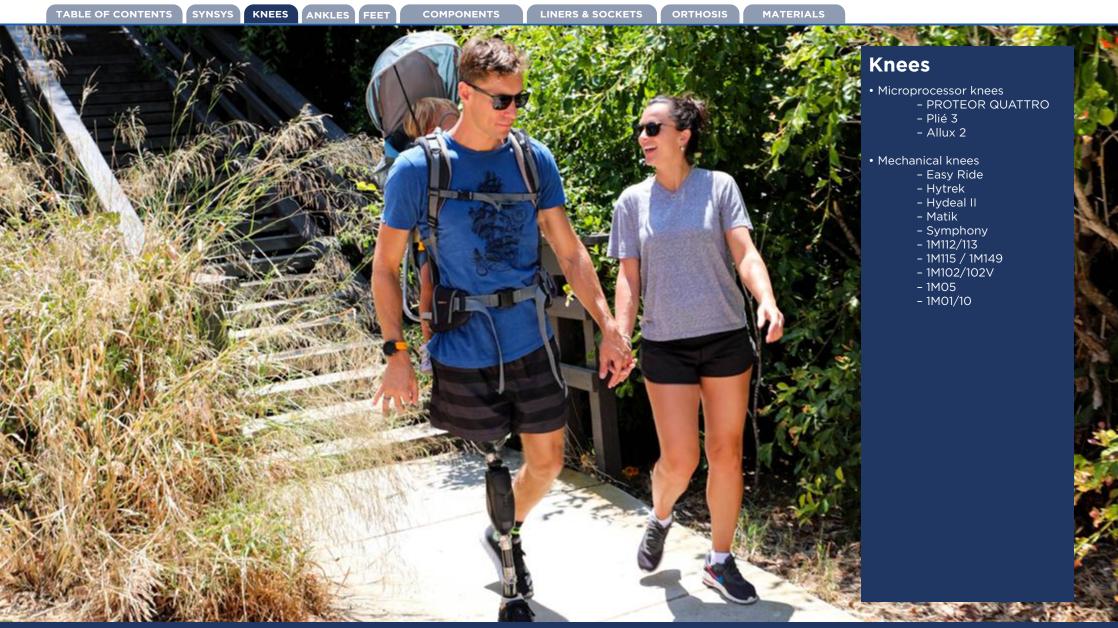



# PROTEOR QUATTRO




TABLE OF CONTENTS

SYNSYS

KNEES ANKLES FEET

COMPONENTS LINE

LINERS & SOCKETS ORTHOSIS

SIS MATERIALS

## **EXPECTMORE**

The superior platform of the PROTEOR QUATTRO Microprocessor Knee has been thoughtfully designed with safety, customization, and adaptability in mind. Our goal is to empower you to live with less interruptions and more freedom.

#### MORE INTUITIVE FOR ELEVATED SECURITY AND DEPENDABILITY

- PROTEOR QUATTRO Control Technology's patented valve allows infinite levels of resistance for effortless transitions between activities.

- Three hyper-responsive sensors read body movements to react to the natural gait of each patient.
- Stumble recovery reacts to each situation by determining the appropriate resistance to recover more naturally.

#### • MORE PERSONALIZED FOR A CUSTOM EXPERIENCESWITCHING BETWEEN ACTIVITIES HAS NEVER BEEN EASIER.

- With up to 20 modes, allowing you to customize movement for specific activities.
- Patients can adjust modes and settings from their phone and knee keypad.
- A mobile app offers prosthetists the simplicity of programming and calibrating settings.
- As the shortest MPK on the market, you can choose from a wider selection of ankles and feet.
- MORE ADAPTABLE FOR FEWER INTERRUPTIONS
- A battery life of two days plus a booster with an additional 2 days of battery.
- Water-resistance (IP67 rating) for full submersion under 1 meter of water for up to 30 minutes.
- Service is not required for three years, and remote firmware updates.
- Remote transmission of 3-months of cadence and usage data.

#### TECHNICAL FEATURES

ltem N°.	QNX0010 QNX0011					
Weight	1655 g / 3.65 lbs					
Build Height	216 mm / 8,5"					
Max. flexion	135°					
Proximal Connector	Male Pyramid Threaded top					
Distal Connector	Male Pyramid					
Max. patient weight	136 kg /	300 lbs				
Activity level	3 - 4					
Water resistance	IP67 - Waterproof					
Battery Life	2 - 3 days					

#### ADDITIONAL ACCESSORY (SOLD SEPARATELY)

External Booster Battery Kit



Programmable via Adjustment App



Adjustable via **Remote Control App** for Users (iOS and Android)







Č)

**#HUMANFIRST** 

ACC0010





KNEES ANKLES FEET

COMPONENTS LINERS & SOCKETS

ORTHOSIS MATERIALS

## Rediscover the versatility of the Plié® 3

The Plié<sup>®</sup> 3 MPK is designed for low to high activity ambulators, providing them the customized support they need and the response they demand.

- Both weatherproof and FULLY SUBMERSIBLE
- · Lightweight design requires minimal energy
- The most responsive stumble and fall protection

• Move instinctively at users own pace in any direction, including taking short steps, walking backwards, or pivoting in confined spaces

#### **TECHNICAL FEATURES**

	-			
Item N°.	KS3-00-KNEE1-KT	KD3-00-KNEE2-KT	<ul> <li>Included with the knee:</li> <li>Standard black shell if colored shell r</li> </ul>	not desired.
Weight	1235 g / 2.72 lbs	1243 g / 2.74 lbs	• USB key for wireless connexion.	
Build Height	235 mm / 9,25"	223 mm / 8.78"	<ul><li>Lithium-ion battery (2 pcs).</li><li>Battery charger.</li></ul>	
Max. flexion	125°	117°	<ul> <li>Air pump with adapter.</li> <li>Smooth hose adapter for pump.</li> </ul>	CE
Proximal Connector	Male Pyramid	Threaded top		
Distal Connector	Male Pyramid			
Max. patient weight	2.5 - 3: 125	2.5 - 3: 125 kg / 4: 100 kg		
Activity level	2.5 -			
Water resistance	IP67 - W			
Battery Life	Greater than 24 hours depending on i	ndividual activity and storage practices		

#### DESIGNER FAIRINGS



1X998 To avoid damage to the pyramid during trials




PLIES





FEET





1X998 To avoid damage to the pyramid during trials



In pursuit of the world's safest knee. ALLUX 2 is the first (and only) 4-Bar MPK that controls both stance, and swing phase. It's unique design boasts a dual safety system based on inherent stability factors and microprocessor control. ALLUX 2 heightens safety and security while providing exceptional functionality to the user.

MATERIALS

- PC and/or remote control no longer required. ALLUX 2 is fully programmable via a wireless enabled device.
- Using a wireless enable device, the user can choose from 5 different modes as needed.
- New needle bearings used in the 4-Bar linkage provide smooth movement, increased durability, improved water resistance, and an industry-leading 180° flexion.
- It's polycentric design reduces chances of stumbling by increasing toe-clearance. In case of stumbling, the microprocessor immediately increases hydraulic resistance to prevent sudden buckling.

• Because of its polycentric design and inherent stability, ALLUX 2 is also suitable for high or low activity users with long transfemoral, or knee disarticulate amputation levels.

#### **TECHNICAL FEATURES**

Included Components

Charging plug cap

Power OFF cap

 Charger AC adapter

Item N°.	1P3	380	1P380-KD		
Weight	151	Og	1520g		
Build height	295mn	n (11.5")	287mm (11.33")		
Max. flexion	180°				
Proximal Connector	Male P	yramid	Threaded Top		
Distal Connector	Male Pyramid				
Max. patient weight	125kg / 275lbs 100kg / 200lbs		275lbs / 125kg	100kg / 200lbs	
Activity level	2-3	4	2-3	4	
Water resistance		IP44 - Wea	atherproof		
Battery & Supplemental backup battery	Lithium Ion				
Battery Life	4 days depei	nding on individua	l activity and stor	age practices	

Backup battery

Extension cable

Backup battery charging cable

Programmable via Adjustment App for Prosthetists (iOS and Android)



Adjustable via **Remote Control App** for Users (iOS and Android)



# easy ride

SYNSYS

TABLE OF CONTENTS

COMPONENTS

**LINERS & SOCKETS** ORTHOSIS

## High impact multisport knee.

The **EasyRide** knee was created in collaboration with adaptive athletes from around the world to ensure optimal performance capabilities for extreme, high impact, all-terrain sports such as surfing, snowboarding, skateboarding, cycling, skiing, and more. The **EasyRide** lets you get back to the activities you LOVE without limitations.

• Easy Ride knee is appropriate for patients involved in sports. Developed with handisport athletes, it has been designed while keeping constantly in mind specific needs of these patients.

• Thanks to its pneumatic shock absorber, it is particularly adapted to sports such as surfing, snowboarding, road biking, mountain biking, roller, skateboarding, paddling. Depending on practiced activity, the user can easily modify the knee configuration and its adjustments.

 Seaproof, Easy Ride knee has been developed for extreme conditions of use. It can operate between -25°C and +40°C

- Paddling
- Surfing

• 1 air pump

2 Torx wrenches

- Wind Surfing
- Water Skiing


- Wake Boarding
- Skiing (Downhill & Cross Country)
- Snowboarding Skateboarding

- Mountain Biking
- Road Biking
- And more...

#### **TECHNICAL FEATURES**

Item N°.	196	1P650				
Weight	1200g /	1200g / 2.64lbs				
Position	Sliding	Biking				
ТН/ВН/Н	257/227/38 mm 10.12/8.94/1.5"	260/230/38mm 10.24/9.06/1.5"				
Pre-flexion	12°	0°				
Flexion	50°	130°				
Material	Aeronau	Aeronautic Alloy				
Proximal Connector	Titanium M	Titanium Male Pyramid				
Distal Connector	Titanium M	ale Pyramid				
Max. patient weight	125 kg /	' 275 lbs				
Activity level		4				
Water resistance	Sear	Seaproof				
Package contents: • 1 knee 1P650	<ul><li>1 pin driver</li><li>2 screws M6x14</li></ul>					

- 2 screws M6x14
- Instructions for use

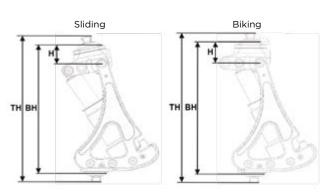












KNEES ANKLES FEET





1X998 To avoid damage to

the pyramid during trials

PROTEOR

# A single axis knee with hydraulic regulation of stance phase and swing phase, equipped with a manual lock.

Strong high-end knee for dynamic transfemoral patients. Navigate everyday life activities on all types of terrain; including slopes and stairs. Offers smooth ambulation and the ability to safely descend stairs step over step.

- Increased patient dynamics.
- Powerful hydraulic brake.
- Wide braking range.
- Optional manual lock.
- Extension assist.
- Maximum patient weight: 150 kg / 330lbs.

#### **TECHNICAL FEATURES**

Item N°.	1P131	P131-KD		
Weight	1265g / 2.79lbs	1285g / 2.83lbs		
ТН/ВН/Н	232/177/36 mm 9.1/7/1.4"	222/174/33 8.7/6.9/1.3"		
Materials	Aluminum, Stainless steel, Titanium			
Max. Flexion	120°			
Proximal Connector	Male Pyramid	Threaded Top		
Distal Connector	Ø34mr	n Tube		
Maximum patient weight	150kg / 330lbs			
Activity level	3-4			
Water resistance	Weather	resistant		

#### KITS

/	Item N°.	Content
	1P131#KIT	1P131 + 1G01-HD + 1D41-HD
2 Mar 19		



MATERIALS

#### STANCE:

Adjustment of sensitivity for switching to braking mode.

#### **RESISTANCE:** Adjustment of braking power.


LOCK: Manual hydraulic lock switch.

#### FLEXION:

Adjustment of flexion angle.

#### EXTENSION:

Dynamic control of swing phase and terminal impact.

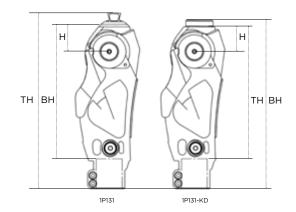





14

TABLE OF CONTENTS

KNEES ANKLES COMPONENTS

ORTHOSIS

MATERIALS

FEET

**LINERS & SOCKETS** 



## Swith to the ideal road.

The HYDEAL II knee can keep up with the everyday life of an active amputee, who alternates walking speeds in his daily life trips. One of the improvements of the Hydeal II knee is an entirely re-engineered performance focused hydraulic unit. The unique improvements to the hydraulic unit allow for a smooth and fluid swing initiation which is also easier for the patient The 4 bar polycentric design offers increased stance phase geometric stability and safety


- Polycentric and hydraulic knee for moderate to high activity level amputee patients (K3 - K4)
- The Flexion and Extension resistance can separately be adjusted to obtain optimum walking conditions for the patient
- The polycentric 4-axis design offers enhanced stability during stance phase
- Suitable for practicing sports such as bike riding



125 kg

#### **TECHNICAL FEATURES**

Item N°.	1P120	1P121	1P120-KD	1P121-KD			
Color	Grey	Orange	Grey	Orange			
Weight	1050g /	′ 2.31lbs	1080g /	2.38lbs			
ТН/ВН/Н	318/200/ 12.52/7.8		309/197/11 mm 12.16/7.76/0.43"				
Materials		Aluminium, Stainless steel					
Max. Flexion	145°						
Proximal Connector	Male Pyramid Threaded Top						
Distal Connector		Ø34mr	n Tube				
Maximum patient weight		125kg /	275lbs				
Activity level	3-4						
Short ext. Spring Cylinder kit	1P11067						
		TH shorten	ing: 30 mm				

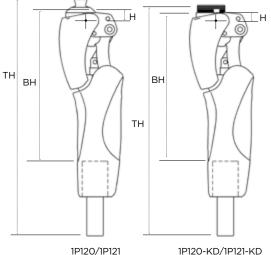

( E 🗐 🗩









# Matik



125 ka



# The Matik was designed to provide an affordable 4-axis pneumatic knee for patients up to 275 lbs.

MATERIALS

Simply and effectively designed to provide high function with low maintenance.

The easy swing of the pneumatic unit and the reduced weight of the knee give the patient a heightened sensation of fluidity and comfort. To support safety during swing phase and reduce the risk of a fall, the toe clearance height reaches 25mm, one of the industry's highest for this type of knee. Matik has both flexion and extension adjustments which address terminal impact and excessive heel rise potentials.

• Secure 4-axis geometry.


FEET

- Safety and security through generous toe clearance during swing phase.
- Compact and lightweight (743g / 26,21 oz).
- Adapted for patients up to 125 kg / 275 lbs .



#### **TECHNICAL FEATURES**

ltem N°.	1P200	1P200-KD		
Weight	743 g /	1.64 lbs		
ТН/ВН/Н	204/175/11,5 mm 8/6.9/0.4"	195/172/8 mm 7.7/6.8/0.3"		
Materials	Aluminum, Stainless steel			
Max. Flexion	170 °			
Proximal Connector	Pyramid	Threaded Top		
Distal Connector	Pyra	imid		
Max. patient weight	125 kg / 275 lbs			
Activity level	2.	-3		

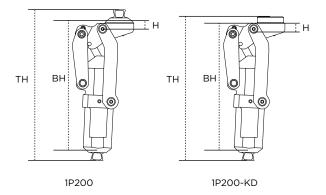



1X998 To avoid damage to the pyramid during trials



16

# SYMPHONY

COMPONENTS

LINERS & SOCKETS





## Fluidity, functionality, safety: a perfect composition.

The Symphony Knee is designed with a unique, 6 Bar polycentric structure that provides an extremely high level of stability during stance phase. Its innovative mechanical sensor, the p-MRS system, automatically detects gait status and controls the stability of the knee joint accordingly. Its hydraulic cylinder provides a smooth swing phase and works with the Symphony's adjustable stance flexion feature to enhance the patient's ambulatory experience and provide a comfortable, confident gait to the user.


• 6 Bar hydraulic knee.

FEET

- Adjustable stance flexion.
- Easy to access user adjustable manual lock.
- High level of stability due to geometric locking of the knee through toe off.
- Low build height.
- Unique hydraulic cylinder design allows easy flexion initiation.
- Convenient and user friendly 7.75in overall height.
- High maximum flexion angle of 160°.

#### **TECHNICAL FEATURES**

Item N°.	1P320	1P321	1P320-KD	1P321-KD		
Proximal connector	Male P	Male Pyramid Threaded Top				
Manual lock	-	х	-	Х		
Total Height	197mm	(7.75")	191mm (7.5")			
A Ref. measurement		156 mm / 6."				
B Ref. measurement	14 mm	n / 0.6"	14.5 mm / 0.6"			
Weight	920 g / 2.03 lbs	970 g / 2.14 lbs	960 g / 2.12 lbs	1010 g / 2.23 lbs		
Max. flexion		16	0°			
Material		Titanium & Aluminum				
Max. patient weight		125 kg / 275 lbs				
Mobility Grade		2	-3			



1X998 To avoid damage to the pyramid during trials





1M112 / 1M113



TABLE OF CONTENTS

KNEES ANKLES FEET

COMPONENTS LINERS & S


LINERS & SOCKETS ORTHOSIS

MATERIALS

### **Compact 4-axis knee**



- Socket rotation adjustment: ± 15°.
- Friction adjustment.
- Extension assist adjustment.
- Safety in stance phase ensured by alignment and axis geometry.
- The 4-axis and linkage geometry provides a shortening of the leg segment during swing phase.



#### **TECHNICAL FEATURES**

ltem N°.	Max. Patient's Weight	Weight	Total Height	Build Height	Height	Material	Max. Flexion	Distal Adapter
1M112	45kg 99 lbs	320 g 0.70 lbs	155 mm	75 mm	11 mm			Tube Ø 22 mm
	80kg	340 g	6.10"	2.95"	0.43"	Aluminum	165°	Tube
1M113	176 lbs 0.75 lbs						Ø 30 mm	

#### ORDER ONE OF THE FOLLOWING TO COMPLETE YOUR ORDER











1M115 / 1M149

TABLE OF CONTENTS

SYNSYS KNEES ANKLES FEET

COMPONENTS LI

LINERS & SOCKETS

ORTHOSIS MATERIALS


 1
 2
 3
 4

 100 kg
 220 lbs



## Single axis knee with brake

- During stance phase, the ground reaction force closes a jaw locking the rotation axis.
- Delivered complete kit with its extension assist ans cosmetic cover.



- Brake adjustment according to patient's weight and activity.
- Knee friction adjustment.
- Extension assist adjustment.

#### **TECHNICAL FEATURES**

ltem N°.	Max. Patient's Weight	Weight	ТН	ВН	н	Material	Flexion	Distal Adapter
1M115	100 kg	540 g 1,19 lbs	75 mm	50 mm	22 mm 0,87''	Steel/SS	- 150 °	Pyramid
1M149	220 lbs	368 g 0,81 lbs	2,98″	1,97''	30 mm 1,18''	Titanium		





1M102/1M102V/1M102-P6/1M102V-P6 \*1234

```
TABLE OF CONTENTS
```

SYNSYS KNEES ANKLES FEET COMPONENTS

**LINERS & SOCKETS** ORTHOSIS

MATERIALS

ΒH

ΤН

1M102

Ø 30mm



The unique alignment and axis geometry of the 1M102 offer increased safety during stance phase. 1M102-P6

- Socket rotation adjustment: ± 15°.
- Friction adjustment.
- Extension assist adjustment.
- Possible fitting of long stumps and knee disarticulations.

• 1M02V: its optional lock ensures enhanced safety on difficult or uneven grounds, or during rehabilitation phase. The optional lock is operated by the patient himself.


#### **TECHNICAL FEATURES**

ltem N°.	Max. Patient's Weight	Weight	Total Height	Build Height	Height	Material	Optionnal lock	Max. flexion	Distal Adapter
1M102	100 kg	565 g / 1.24 lbs		108 mm			No		Tube
1M102V	220 lbs	575 g / 1.27 lbs	184 mm	0.24"	12 mm 0.47''	Aluminum	Yes	- 160 °	Ø 30 mm
1M102-P6	125 kg 275 lbs	600 g / 1.32 lbs	7.24″	113 mm			No		Tube
1M102V-P6		625 g / 1.38 lbs		0.25"			Yes		Ø 34 mm

#### ORDER ONE OF THE FOLLOWING TO COMPLETE YOUR ORDER







#### **KNEE DISARTICULATION KIT**

BH

Ø 34mm

TH



( E 🗐 🗾



1X998 To avoid damage to

the pyramid during trials

**#HUMANFIRST** 

20

# 1MO5

TABLE OF CONTENTS


KNEES ANKLES FEET

SYNSYS

## 4-axis knee with short linkages

COMPONENTS

- Appropriate. for patients with short residual limb.
- Safety in stance phase ensured by alignment and axis geometry.
- The 4-axis and linkage geometry provides a shortening of the leg segment during swing phase.



100 kg

- Socket rotation adjustment: ± 15°.
- Joint friction adjustment.
- Lock with adjustable stop.

#### **TECHNICAL FEATURES**

ltem N°.	Max. Patient's Weight	Weight	ТН	ВН	Н	Material	Max. flexion	Distal adapter
1M05	100 kg 220 lbs	460 g 1,01 lbs	166 mm 6,53''	85 mm 3,35''	11 mm 0,43''	Aluminum	140 °	Tube Ø30 mm

LINERS & SOCKETS

ORTHOSIS

MATERIALS

#### COMMANDEZ L'UN DES ÉLÉMENTS SUIVANTS POUR COMPLÉTER VOTRE COMMANDE











1001/100/1001-P6/100-P6



TABLE OF CONTENTS

SYNSYS KNEES ANKLES FEET

COMPONENTS

LINERS & SOCKETS

With its convenient lock, the 1M Series ensures patient safety while walking.

1M01 / 1M10


ORTHOSIS MATERIALS

1M01-P6 / 1M10-P6

• Socket rotation adjustment: ± 15°.

• Joint friction adjustment.

• Lock with adjustable stop.



TH BH Ø 34mm

#### **TECHNICAL FEATURES**

ltem N°.	Max. Patient's Weight	Weight	Total Height	Build Height	Height	Material	Release lever	Max. flexion	Distal Adapter	
1M01	220 lbs	345 g 0.76 lbs	99 mm	58 mm	13 mm		No		Tube	
1M10	100 kg	355 g 0.78 lbs	3.89″	2.28″	0.51″	Aluminum + Stainless Steel	Yes	130 °	Ø 30 mm	
1M01-P6	275 lbs	375 g	102 mm	59 mm	14 mm		No		Tube	
1M10-P6	125 kg	0.83 lbs	4.01″	2.32″	0.55″		Yes		Ø 34 mm	

#### ORDER ONE OF THE FOLLOWING TO COMPLETE YOUR ORDER







1X998 To avoid damage to the pyramid during trials

1M10-P6


1M01





22

# **ONKLES**

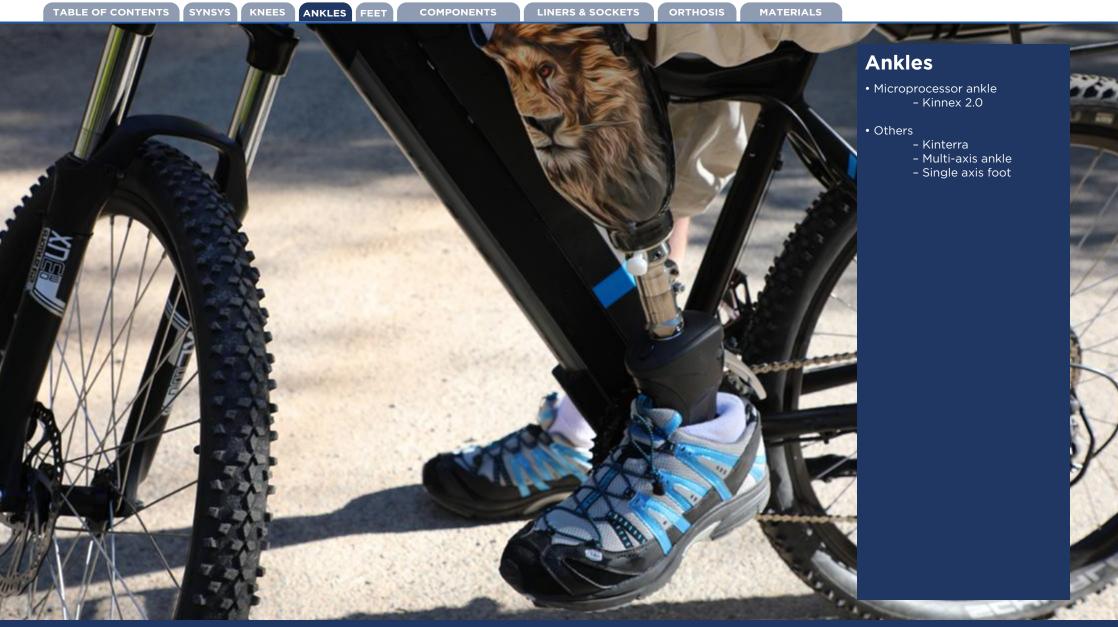



#HUMANFIRST

.....





Spectra sock included Order Foot shell p.52 (3 colors choice)

PROTEOR



## Designed for real life

Kinnex 2.0 microprocessor ankle combines sophisticated microprocessor ankle innovation with time tested carbon fiber foot technology, providing users a uniquely stable and natural walking experience whether on flat, angled, smooth or uneven terrain. Water the lawn or walk in the rain without worrying about exposure to water, dust and dirt.

- Seamlessly adjust to changes in ground slope within the first step.
- Confidently brave the elements with an IP67 certified ankle.
- Comfortably match heel heights with virtually any shoe for work or play (via App).
- Optimize energy storage and energy return with a bolt free full carbon fiber foot plate.
- $\cdot$  30° of Ankle Articulation 20° plantar flexion / 10° dorsi flexion allows the ankle and foot to be ideally positioned in relation to the ground.
- Battery Life: Greater than 24 hours depending on individual activity and storage practices

User Weight Rating: 125 kg for moderate activity, 100 kg for high activity (Mob 4 no sports)

Heel Height: The automated heel height adjustment has a range from 0 to 5  $\mbox{cm}$ 

	Category selection according to weight and activity										
Activity / Weight	44-52 kg 100-115 lbs	53-59 kg 116-130 lbs	60-68 kg 131-150 lbs	69-77 kg 151-170 lbs	78-88 kg 171-195 lbs	89-100 kg 196-220 lbs	101-116 kg 221-255 lbs	117-125 kg 256-275 lbs			
Low	1	1	2	3	4	5	6	7			
Moderate	1	2	3	4	5	6	7	-			

ltem N°.	Categories	Side	Size (cm)	Sandal toe option	Heel height	ВН	Weight
			24 to 25	yes		184 mm / 7.2"	
F14	1 to 7	G/D	26 to 28	yes	0 to 50 mm	186 mm / 7.3"	1,49 kg / 3.281bs
			29 to 30	no		186 mm / 7.3"	

User and Prosthetist App Streamlined set up, monitoring, customization and cadence reporting are a touch away with the Clinician and Patient Apps.

्रि 🎽 🎽 🤇 🗧 🔁





	. 4	
TABLE OF CONTENTS	1	
TABLE OF CONTENTS		

SYNSYS KNEES

#### ANKLES FEET COMPONENTS

LINERS & SOCKETS ORTI





### **Redefining the Ankle Experience**

The time-tested hydraulic ankle that continues to raise the bar for quality, stability, range of motion, and comfort.

- 15° of plantarflexion and 2° of dorsiflexion allow the foot to reach and maintain footflat across differing terrains and improved socket comfort while sitting
- Maximum patient's weight 150 kg (330 lbs)
- Modified built heights
- Occasional submersion for maximum 30 minutes in 1 m of water.

	Selection of foot category based on patient's weight and activity level									
Weight / Activity	44-52 kg 100-115 lbs	53-59 kg 116-130 lbs	60-68 kg 131-150 lbs	69-77 kg 151-170 lbs	78-88 kg 171-195 lbs	89-100 kg 196-220 lbs	101-116 kg 221-255 lbs	117-132 kg 256-290 lbs	133-150 kg	
Low	1	1	2	3	4	5	6	7	8	
Moderate	1	2	3	4	5	6	7	8	-	

RM3-00-0_ A	S_
Category 1-8	Side
Size 22-30	R- Right L- Left

Sandal Toe only New foot cosmetics FTC-2K



1X998 To avoid damage to the pyramid during trials

ltem N°.	Categories	Side	Size (cm)	Heel Height	ВН	Weight
RM3		R/L	22 to 25 118 mm / 4.65"		764 g / 1.68 lbs	
	1 to 8		26 to 28	10 mm	119 mm / 4.67"	833 g / 1.84 lbs
			29 to 30		122 mm / 4.81"	956 g / 2.11 lbs

\*Based on a sizes 23, 26, 29, Cat 4 with Foot Shell, spectra sock and 10 mm heel height

SPECTRA	ltem N°.				
22 to 25	S0-NPS-20030-00				
26 to 28	S0-NPS-20035-00				
29 to 30	S0-NPS-20040-00				







# MULTI-AXIS ANKLE

SYNSYS

KNEES ANKLES FEET

<u>
大
1
2
3
4
100 kg
220 lbs
</u>

TABLE OF CONTENTS

1D111

#### **Multi-axis Ankle**

The multiaxis ankle enables any S.A.C.H. or DynaStep foot receiving a M10 screw to perform motions of plantar and dorsiflexion, as well as inversion-eversion.

• Helps flat foot achievement and is convenient for uneven grounds thanks to its numerous possible motions.

ORTHOSIS

MATERIALS

- Recommended for both trans-femoral and trans-tibial amputees.
- A wide range of front and rear bearings allows to match the ankle to patients' activity and weight.

**LINERS & SOCKETS** 

• Delivered fitted with EE010-1 and EE008 bearings

COMPONENTS





	Multi-axis Ankle	Bumper for Heel Strike				Front Bearing			
ltem N°.	1D111	EE013	EE007	EE008	EE009	EE010-1	EE010-2	EE010-3	
Color		Brown	Beige	Black	Grey	Honey	Blue	lvory	
Hardness		X-soft	Soft	Medium	Hard	Soft	Medium	Hard	
Connection	Male Pyramid / M10 screw								
Build Height	53 mm / 2.09"								
Weight (Size 25)	250 g / 0.55 lbs								









26

# SINGLE AXIS FOOT

<u></u> 大 

TABLE OF CONTENTS

SYNSYS KNEES ANKLES FEET

COMPONENTS

LINERS & SOCKETS ORTHOSIS

RTHOSIS MATERIALS

 1
 2
 3
 4

 1
 1
 2
 3
 4

 1
 1
 1
 1
 1

 1
 1
 1
 1
 1

 1
 1
 1
 1
 1

 1
 1
 1
 1
 1

 1
 1
 1
 1
 1

 1
 1
 1
 1
 1

 1
 1
 1
 1
 1

 1
 1
 1
 1
 1

 1
 1
 1
 1
 1

 1
 1
 1
 1
 1

 1
 1
 1
 1
 1

 1
 1
 1
 1
 1

 1
 1
 1
 1
 1

 1
 1
 1
 1
 1

 1
 1
 1
 1
 1

 1
 1
 1
 1
 1

 1
 1
 1
 1
 1


 1
 1
 1
 1
 1

 1
 1
 1
 1
 1

 1
 1
 1
 1
 1

 1
 1
 1
 1

</tr

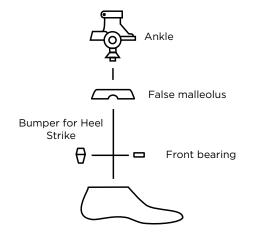

Complete Solution Kit 1802+1D12+EE001+EE007+1E1301/1E1401/1E1501





Foot only



Single axis foot allows plantar flexion at heel strike and s dorsiflexion, which reproduces the physiological ankle joint.

- Shock absorption at heel strike is ensured by heel inserts of various hardnesses.
- Step completion is ensured by the flexible forefoot.
- A variety of front bearings enables to accommodate equinus for heels from 10 to 30 mm.



	Foot	Ankle	E	alse Malleo	lv.	Rear	Bumper	for Heel S	Striko		E,	ont Beari	na	
	1000	Alikie			i y	Real	Dumper						lig	
Item N°.	1B02	1D12	1E1301	1E1401	1E1501	EE013	EE007	EE008	EE009	EE012	EEO11	EE001	EE002	EE003
Side (left/right)	G/D													
Size	22 to 29		22 to 24	25 to 27	28 to 29									
Color	Caucasian					Brown	Beige	Black	Grey					
Stiffness						X-soft	Soft	Medium	Hard					
Thickness							50	mm		4 mm	5 mm	6 mm	7 mm	9 mm
Material		Alu		PU			Elast	omer		Elastomer				
Weight (Size 25)	390 g	250 g	25 g	30 g	35 g	17 g		20 g			2 g	3 g	4 g	5 g
Heel height										10 mm	15 mm	20 mm	25 mm	30 mm
Max. Patient weight	100 kg /	220 lbs												
Connexion		Tube Ø												
		30 mm												
Activity level	1-	2												







# Feet





# DYNODOPT

CANDAL TO

SYNSYS

TABLE OF CONTENTS



COMPONENTS LIN

LINERS & SOCKETS ORTHOSIS

## Fit, Finish and Roll

ANKLES FEET

- Slim profile, carbon fiber foot system with a slender, anatomic design
- Full length attached heel with no bolts or bushings
- Combination of smooth rollover function, improved stability, and dynamic response makes DynAdapt™ the best all-around foot for all K3 users
- EnduraCore® Technology delivers up to 3 times the fatigue life of a standard laminate
- Split keel and heel design delivers enhanced stability
- Lightweight construction only 635g (incl. foot shell)

	Category selection according to weight and activity												
Activity / Weight	44-52 kg 100-115 lbs	53-59 kg 116-130 lbs	60-68 kg 131-150 lbs	69-77 kg 151-170 lbs	78-88 kg 171-195 lbs	89-100 kg 196-220 lbs	101-116 kg 221-255 lbs	117-130 kg 256-285 lbs	131-147 kg 286-325 lbs	148-166 kg 326-365 lbs			
Low	1	1	2	3	4	5	6	7	8	9			
Moderate	1	2	3	4	5	6	7	8	9	-			
High	2	3	4	5	6	7	8	9	-	-			

ltem N°.	Categories	Side	Size (cm)	Sandal toe option	Heel height	Build Height	Weight
			22 to 25	yes		158 mm / 6 1/5''	535 g / 1.18 lbs
F10	1 to 9	L/R	26 to 28	yes	10 mm 3/8"	170 mm / 6 3/4"	635 g / 1.39 lbs
			29 to 31	no	0,0	182 mm / 7 1/5"	750 g / 1.65 lbs



Size 22-31

Spectra sock included

Order Foot shell p.52 (3 colors choice)

Toe Configuration – RU- regular SR- sandal toe, right SL- sandal toe, left

F10-00-0 Category

 $\bigcirc$ 





# DYNATRek

SYNSYS


**KNEES** 

ANKLES

FEET

TABLE OF CONTENTS





# Over inclines, declines, sand, gravel, stairs, or any surface, the DynaTrek was designed to provide smoothness and reliability for the active user.

ORTHOSIS

MATERIALS

With its split-keel blade, the **DynaTrek** is an all-terrain foot that offers optimal inversion, eversion, and energy return.

- Increased patient dynamics.
- Great for transfemoral or transtibial patients.

COMPONENTS

- Convenient for any terrain.
- Maximum patient weight 330 lbs.
- Fully waterproof.
- Includes heel wedges for stiffness adjustment.
- Includes cosmetic kit contains: a foot shell, spectra sock, malleolar clip.

**LINERS & SOCKETS** 


Item N°.	1A600				
Activity level	3-4				
Side (Right/Left)	G / D				
Weight (size 25 without footshell)	400 g / 0.88 lbs				
Size	22 to 25	26 to 30			
Total Height	170 mm / 6.69"	180 mm / 7.08"			
Build Height	154 mm / 6.1" 165 mm / 6.5				
Max. Patient Weight	150kg /	′ 330lbs			

	Categ	ory selection ac	cording to activ	ity and weight					
Activity/Weight         99-131 lbs 45-59kg         132-164 lbs 60-74kg         165-197lbs 75-89kg         198-230lbs 90-104kg         231-274lbs 105-124kg         275-330lbs 125-150 kg									
Normal	1	2	3	4	5	6			
Hlgh	2	3	4	5	6	-			

NOTE: Increasing category numbers indicate increased keel response. FOR BILATERAL PATIENTS: Increase by one category for added stability.

	Category selection according to activity and weight											
Size (cm)/Category	1	2	3	4	5	6						
22 to 25	•	•	•	•								
26 to 30	•	•	•	•	•	•						









# SHOCKWQVe

SYNSYS

TABLE OF CONTENTS

KNEES ANKLES

COMPONENTS LINERS & SOCKETS

ORTHOSIS MATERIALS





## Shocking Absorption. Effortless Momentum.

The Freedom **ShockWave**<sup>™</sup> vertical shock foot incorporates a unique Spherical Shock Unit (SSU) that works in harmony with the existing features of the classic Freedom foot design and proprietary EnduraCore<sup>®</sup> technology. The multi-functional Spherical Shock Unit (SSU) provides both vertical shock relief and axial rotation offering K3/ K4 ambulators a shockingly smooth experience during daily life and high impact activities; its light weight and slim profile provides an easy fit and finish.

• Resistant to fresh water.

FEET


- Ultimate shock absorption at heel strike eases stress on the residual limb for a more natural gait.
- Axial rotation of +/- 15° reduces socket pressure and allows for quick pivoting in a seamless motion.
- Full-length heel initiates plantar flexion at heel strike for better ground compliance and maximum energy return.
- Bolt-less design eliminates dead spots and weak structural areas resulting in a lighter and more reliable foot.
- Split keel and heel delivers added motion improving stability, comfort, and confidence on various terrains.
- EnduraCore technology provides ideal strength, flexibility, durability, and high energy return.
- Rated to 325lbs, 36-month warranty.

#### **TECHNICAL FEATURES**

ltem N°.	Categories	Side	Size (cm)	Sandal toe option	Heel height	Build Height	Weight
	F20 1 to 8	to 8 L/R	23 to 25	yes		176 mm / 6.9"	897 g / 1,98lbs
F20			26 to 28	yes	10 mm 3/8"	189 mm / 7.4"	978 g / 2,16lbs
			29 to 30	no	6, 6	200 mm / 7.8"	1131 g / 2,49lbs

\*Build height based on size 26cm Cat 4 foot module with foot shell and 10mm heel height. Sandal-toe available for sizes 23-28cm.

	Module selection according to activity and weight												
Weight/ Activity level	100-115lbs 44-52kg	116-130lbs 53-59kg	131-150lbs 60-68kg	151-170lbs 69-77kg	171-195lbs 78-88kg	196-220lbs 89-100kg	221-255lbs 101-116kg	256-285lbs 117-130kg	286-325lbs 131-147kg				
Low	1	1	2	3	4	5	6	7	8				
Moderate	1	2	3	4	5	6	7	8	-				
High	2	3	4	5	6	7	8	-	-				



Spectra sock included

Order Foot shell p.52 (3 colors choice)

23-30 **Toe Configuration** RU- Standard SR- sandal toe, right SL- sandal toe, left







SANDAL TOA

TION

TABLE OF CONTENTS

ANKLES FEET

COMPONENTS **LINERS & SOCKETS** 

MATERIALS ORTHOSIS

## Ultimate flexibility for a smoother gait

- Angle-top design increases the length of the carbon fiber spring to store and return more energy, and provide a smoother gait
- Split keel design delivers excellent inversion/eversion
- Full-length heel enables foot flat early in the gait cycle, providing a stable base of support and an exceptionally smooth gait

	Category selection according to weight and activity												
Activity / Weight	44-52 kg 100-115 lbs	53-59 kg 116-130 lbs	60-68 kg 131-150 lbs	69-77 kg 151-170 lbs	78-88 kg 171-195 lbs	89-100 kg 196-220 lbs	101-116 kg 221-255 lbs	117-130 kg 256-285 lbs	131-147 kg 286-325 lbs	148-166 kg 326-365 lbs			
Low	1	1	2	3	4	5	6	7	8	9			
Moderate	1	2	3	4	5	6	7	8	9	-			
High	2	3	4	5	6	7	8	9	-	-			

ltem N°.	Categories	Side	Size (cm)	Sandal toe option	Heel height	Build Height*	Weight*
			22 to 25	yes		135 mm / 5.3"	504 g / 1.1 lbs
FS1	1 to 9	L/R	26 to 28	yes	10 mm 3/8"	158 mm / 6.2"	597 g / 1.3 lbs
		-	29 to 31	no	0,0	172 mm / 6.8"	756 g / 1.7 lbs

\*Based on sizes 23, 26, 29, cat. 4, with foot shell, Spectra sock and 10 mm heel height



# PROTEOR

**#HUMANFIRST** 32



## Spectra sock included Order Foot shell p.52 (3 colors choice)



Toe Configuration -

Size

22-31

FS1-00-0 A -Category

1-9

 $\bigcirc$ 

# HIGHLANDER® AND HIGHLANDER® MAX

TABLE OF CONTENTS SYNSYS KNEES ANKLES FEET COMPONENTS

**LINERS & SOCKETS** ORTHOSIS MATERIALS

## Proven technology for dependable performance

- Offers an ideal blend of stability and action, often preferred by transfemoral patients
- Split keel provides excellent inversion/eversion

## Highlander®

	Category selection according to weight and activity												
Activity Weight	44-52 kg 100-115 lbs	53-59 kg 116-130 lbs	60-68 kg 131-150 lbs	69-77 kg 151-170 lbs	78-88 kg 171-195 lbs	89-100 kg 196-220 lbs	101-116 kg 221-255 lbs	117-130 kg 256-285 lbs	131-147 kg 286-325 lbs	148-166 kg 326-365 lbs			
Low	1	1	2	3	4	5	6	7	8	9			
Moderate	1	2	3	4	5	6	7	8	9				
High	2	3	4	5	6	7	8	9	-	-			

ltem N°.	Categories	Side	Size (cm)	Sandal toe option	Heel height	Build Height*	Weight*
			22 to 25	yes	10	97 mm / 3.8"	436 g / 1.0 lbs
FS3	1 to 9	L/R	26 to 28	yes	10 mm 3/8"	110 mm / 4.3"	538 g / 1.2 lbs
		29 to 31	no	5/0	118 mm / 4.6"	691 g / 1.5 lbs	

\*Based on sizes 23, 26, 29, cat. 4 with foot shell, Spectra sock and 10 mm heel height

## Highlander<sup>®</sup> MAX

Category selection according to weight and activity								
Activity / Weight	286-325 kg 131-147 lbs	326-365 kg 148-166 lbs	167-190 kg 366-418 lbs	191-217 kg 419-478 lbs	218-226 kg 479-500 lbs			
Low	-	-	10	11	12			
Moderate	-	10	-	-	-			
High	10	11	-	-	-			

ltem N°.	Categories	Side	Size (cm)	Sandal toe option	Heel height	Build Height*	Weight*
FS3-H5 10 to 12	L/R	26 to 28	yes	10 mm	111 mm / 4.4"	687 g / 1.5 lbs	
		29 to 31	no	3/8"	121 mm / 4.8"	859 g / 1.9 lbs	

\*Based on sizes 23, 26, 29, cat.10 with foot shell, Spectra sock and 10 mm heel height

#### HEAVY DUTY COMPONENTS TO COMPLETE YOUR ORDER



ACC-00-20201-00



ACC-00-20202-00


ACC-00-20203-00















**#HUMANFIRST** 



226 kg

 $\checkmark$ 



SANDAL TO

KNEES ANKLES FEET

COMPONENTS LINERS & SOCKETS



## Maximum Shock Value

The Agilix<sup>™</sup> is a multi-axial, shock absorbing flexible foot system designed to manage loading impacts, reduce socket shear forces and improve comfort while walking on nearly any terrain. The ultra-lightweight design offers K3 ambulators shockingly comfortable performance at a value like no other.

ORTHOSIS

MATERIALS

- Vertical shock absorption and carbon fiber flexibility optmized for low to moderate impact K3 ambulators.
- Multi-axial function increases ground compliance and stability; streamlined, splittoe design results in improved long-term durability, saving time and money
- Full length dynamic heel attached at the toe ensures a seamless roll-over, for superior comfort and a more symmetrical gait
- Lower profile and lighter weight than the competitive alternative, allowing users to do more and feel less tired at the end of the day

Category selection according to weight and activity										
Activity / Weight	44-52 kg 100-115 lbs	53-59 kg 116-130 lbs	60-68 kg 131-150 lbs	69-77 kg 151-170 lbs	78-88 kg 171-195 lbs	89-100 kg 196-220 lbs	101-116 kg 221-255 lbs	117-130 kg 256-285 lbs	131-147 kg 286-325 lbs	148-166 kg 326-365 lbs
Low	1	1	2	3	4	5	6	7	8	9
Moderate	1	2	3	4	5	6	7	8	9	-

	ltem N°.	Categories	Side	Size (cm)	Sandal toe option	Heel height	Build Height*	Weight*
				22 to 25	yes		155 mm / 6.1"	550 g / 1.2 lbs
	F15	1 to 9		10 mm 3/8"	166 mm / 6.5"	628 g / 1.4 lbs		
			29 to 31	no	3, 3	178 mm / 7.0"	790 g / 1.7 lbs	

\*Based on sizes 23, 26, 29, cat. 4, with foot shell, Spectra sock and 10 mm heel height



Size

Spectra sock included

Order Foot shell p.52 (3 colors choice)

Toe Configuration — RU- regular toe, universal SR- sandal toe, right SL- sandal toe, left

F15-00-0

 $\bigcirc$ 





# PACIFICA® AND PACIFICA® LP

ANKLES FEET



## The perfect balance of flexibility and durability

COMPONENTS

• Choice of two low profile designs ideal for patients with long residual limbs or those needing more build space

**LINERS & SOCKETS** 

- LP design requires less than 50 mm of clearance
- Lightweight and durable
- · Foot lies within foot shell so cosmetic finishing is simplifed



Size 24-31

Toe Configuration RU- regular toe, universal SR- sandal toe, right SL- sandal toe, left




TABLE OF CONTENTS

FS2-00-0 Category


SYNSYS

Pacifica<sup>®</sup>

KNEES

Spectra sock included Order Foot shell p.52 (3 colors choice)  $\bigcirc$ 

PROTEOR



					<b>.</b>	,				
Activity / Weight	44-52 kg 100-115 lbs	53-59 kg 116-130 lbs	60-68 kg 131-150 lbs	69-77 kg 151-170 lbs	78-88 kg 171-195 lbs	89-100 kg 196-220 lbs	101-116 kg 221-255 lbs	117-130 kg 256-285 lbs	131-147 kg 286-325 lbs	148-166 kg 326-365 lbs
Low	1	1	2	3	4	5	6	7	8	9
Moderate	1	2	3	4	5	6	7	8	9	-
High	2	3	4	5	6	7	8	9	-	-

Category selection according to weight and activity

ORTHOSIS

MATERIALS

#### **PACIFICA®**

ltem N°.	Categories	Side	Size (cm)	Sandal toe option	Heel height	Build Height*	Weight*
		24 to 25 yes	65 mm / 2.6"	454 g / 1.0 lbs			
FS2	1 to 9	L/R	26 to 28 yes 3/8"	10 mm 3/8"	66 mm / 2.6"	545 g / 1.2 lbs	
			29 to 31	-, -	0,0	70 mm / 2.8''	705 g / 1.6 lbs

#### PACIFICA® LP

ltem N°.	Categories	Side	Size (cm)	Sandal toe option	Heel height	Build Height*	Weight*
		1 to 9         L / R         22 to 25         yes         10 mm           3/8"         3/8"         3/8"         3/8"		48 mm / 1.9"	395 g / 0.9 lbs		
FS4	FS4 1 to 9		26 to 28	yes	10 mm 3/8"	54 mm / 2.1"	537 g / 1.2 lbs
		29 to 31	no	0, 0	58 mm / 2.3"	746 g / 1.6 lbs	

\*Based on sizes 23 (Pacifica LP), 24 (Pacifica), 26, 29, cat. 4, with foot shell, Spectra sock and 10 mm heel height



SANDAL TO

# DYNACITY

SYNSYS


KNEES ANKLES

COMPONENTS LINERS & SOCKETS

ORTHOSIS MATERIALS







# Dynacity is a carbon fiber energy storing foot engineered to bring flexibility and comfort for daily use in full confidence.

Designed for patients with moderate activity, Dynacity allows them to manage daily ambulations safely and with minimum effort.

- Moderate activity user
- Transfemoral or Transtibial fitting
- For daily use

FEET


- Progressive and smooth rollover
- Heel cushioning
- Maximum patient weight: 125 kg/275 Lbs
- Weather resistant
- Polyurethane foot shell supplied

Item N°	1A510#	1A510#*B		
Color	Caucasian	Ebony		
Activity level	2-3			
Side (Right/Left)	G / D			
Weight (SIze 25 without Footshell)	445 g / 0.98 lbs			
Size	22 to 30			
Total Height	149 mm / 5.9"			
Build Height	130 mm / 6.1"			
Max. Patient Weight	125kg / 275lbs			



1X998 To avoid damage to the pyramid during trials

PROTEOR

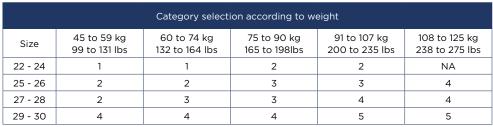



### Exalto

TABLE OF CONTENTS





SYNSYS

KNEES

### Enthusiasm every day

COMPONENTS

ANKLES FEET

Exalto is an energy storing foot, designed for a daily safe and comfortable usage of patients with low to moderate activity. Having a progressive and smooth rollover, it helps enhancing confidence in every step.

ORTHOSIS

MATERIALS

- Two split blades, both covering the full foot length, to ease stability and comfortable rollover.
- Adapts to uneven terrains thanks to its split blades enabling inversion/eversion movements.

LINERS & SOCKETS

- With its light weight optimized shape, and low built height, Exalto suites a large patient panel, up to 166kg.
- Resistant to immersion in salted and chlorine water.


F13-00	ARU
Category	Size
01 - 09	22-31

ltem N°.	Categories	Side	Size(cm)	Heel height	Build height	Weight
			22 to 25		98 mm / 3 7/8"	440 g / 1 lbs
F13	01 to 09	L/R	26 to 28	10 mm	110 mm / 4 3/8"	540 g / 1.2 lbs
			29 to 31		118 mm / 4 3/4"	700 g / 1.5 lbs



PROTEOR

			Sele	ction of foot	category ba	sed on patio	ent's weigh	t and activit	ty		
Mainht	lbs	100-115	116-130	131-150	151-170	171-195	196-220	221-255	256-285	286-325	326-365
Weight	kg	44-52	53-59	60-68	69-77	78-88	89-100	101-116	117-130	131-147	148-166
Low		01	01	02	03	04	05	06	07	08	09
Moderate 01 02 03 04		04	05	06	07	08	09	-			





**#HUMANFIRST** 



Item N°.

KIT-00-1148U-00

# easy run

SYNSYS

KNEES

TABLE OF CONTENTS



### In the gym, at the park, or on the trail... the EASY RUN blade is the perfect foot to get you moving.

ORTHOSIS

MATERIALS

So, you're not an experienced sprinter? Not to worry! Whether you're exploring new activities or looking to take your daily workout to a new level, the EASY RUN will help you increase strength, mobility, happiness, and amplify your life. Specifically designed for the "every day user",

With its all-terrain, all-weather, curved fiberglass blade design, and anti-slip Vibram<sup>®</sup> Sole... you can take your EASY RUN workout outside with confidence.

- For the every day user.
- Rotatable titanium pyramid adapter.
- Curved fiberglass blade.
- Lower blade with optimized curvature.

COMPONENTS

Anti-slip sole.

ANKLES FEET

• 6 vibrant designs.

#### TECHNICAL FEATURES

Weight	1080 g / 2.20lbs
Build Height	220 mm / 8.66"
Materials	Fiberglass + rubber
Connection	Rotatable Pyramid



Orange (O) Black (N) Water (E)

E) Tag (G) Purple (V)		
-----------------------	--	--

	Green replacement sole	1A92013-1
	Black replacement sole	1A92013-2

	Category selection according to activity and weight												
Activity/Weight	40-49kg 88-108lbs	50-59kg 110-130lbs	60-69kg 132-152lbs	70-79kg 154-174lbs	80-89kg 176-194lbs	90-99kg 198-218lbs	100-110kg 220-242lbs						
Moderate Impact		1	2	3	4	5	6						
High Impact	1	2	3	4	5	6							

LINERS & SOCKETS



1A920-

Category Color 1-6 O/N/E/G/V/U







### RUSH HIPRO

SYNSYS

TABLE OF CONTENTS

KNEES ANKLES FEET

COMPONENTS LINERS & SOCKETS

ORTHOSIS MATERIALS







 $\langle \mathbf{O} \rangle$ 



RUSH HiPro<sup>®</sup> provides the most realistic and responsive foot and ankle motion available. Made from an advanced engineered glass composite, which is three times more flexible than most conventional prosthetic feet. The energy return of this foot enables patients to easily traverse the most aggressive terrain while experiencing zero dead spots.

- Highly-dynamic
- Durable
- Smooth roll-over
- High-energy return
- All-terrain
- Waterproof (fresh or salt water)
- Reduced socket issues

#### **TECHNICAL FEATURES**

		HiPro
Weight (Size 25	without foot shell)	653 g / 1.44 lbs
Build Height	22 - 24	165 mm / 6.5"
including	25 - 27	175 mm / 6.9"
Foot shell	28 - 29	181 mm / 7.1"
Heel rise		10mm / 3/8"

							Cat	egor	y sel	ectic	on ac	cord	ing t	o act	tivity	, wei	ght a	and s	ize																	
\//aimht	kg		0-48	;	4	49-64	4	(	64-79	Э	;	80-95		80-95			80-95			80-95			96-11		112-127		128-143			14	14-15	59	160-166			
Weight	Lbs		0-105	5	10	06-14	0	1	41-17	5	1	76-21	0	2	11-24	5	24	16-28	30	2	81-31	15	3	16-35	50	3	51-36	65	L = Lc							
Activit	y level		м	н		м	н		м	н		м	н	L	м	н	1	м	н		м	н		м	н		м	н	M = M							
Si	ze	L	1.1			1.1			1.1			1.1		L	1.1		L	1.1		L	1.1			1.1		L	1.1		H = Hi							
22	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	-	-	-	-	-	-	-	-	-	-	-	-	-								
23	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	-	-	-	-	-	-	-	-	-	-	-	-	-								
24	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	6	6	6	-	-	-	-	-	-	-	-	-	-								
25	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	6	6	6	7	7	7	-	-	-	-	-	-	-								
26	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	6	6	6	7	7	7	-	-	-	-	-	-	-								
27	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	6	6	6	7	7	7	8	8	8	9	9	9	-								
28	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	6	6	6	7	7	7	8	8	8	9	9	9	-								
29	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	6	6	6	7	7	7	8	8	8	9	9	9	-								

NOTE: Increasing category numbers indicate increased keel response. FOR BILATERAL PATIENTS: Increase by one category for added stability.



available (page 52)

1X998 To avoid damage to the pyramid during trials

Footshell (including Spectra sock & cap) to be ordered separately. Two colors



### RUSH RAMPAGE

TABLE OF CONTENTS SYNSYS

KNEES ANKLES FEET

COMPONENTS LINERS & SOCKETS





#### **Unbridled Capabilities.**

The RUSH RAMPAGE® has arrived. We've taken the smooth roll-through, increased comfort, and all-terrain capability of its predecessors and created a new, more cosmesis-friendly option, with a lower overall product weight. The RUSH RAMPAGE® is the perfect solution for individuals seeking a blend of both cosmetic, and high-performance capabilities found only in the RUSH Foot® Collection. Are you ready to RAMPAGE?

ORTHOSIS

MATERIALS

- Cosmesis-ready to meet your aesthetic preferences.
- Lower overall product weight.
- Smooth roll through with unparalleled energy return.
- Biometric ankle motion simulates natural gait.
- Extreme reliability for any use in any environment.
- Waterproof (fresh or salt water)

TECHNICAL FEATUR	RES	RUSH RAMPAGE
Weight (Size 2	25 without foot shell)	595 g / 1.31 lbs
Build Height	22 - 24	168 mm / 6.625"
including	25 - 27	181 mm / 7.125"
Foot shell	28 - 29	184 mm / 7.25"
Heel rise		10mm / 3/8"

							Cat	egor	y sel	ectio	on ac	cord	ing t	o aci	tivity	, wei	ght a	ind s	ize											
Weight	kg		0-48	;		49-64	4		64-79	9	8	80-95			80-95			96-111		112-127		128-143			14	44-15	59	160-166		
weight	Lbs		0-105	5	10	06-14	0	1	41-17	5	1	76-21	0	2	11-24	5	24	16-28	30	2	81-3	15	3	16-35	50	3	51-36	65		
Activi	ty level		м	н	L	м	н	1	м	н		м	н		м	н	ı	м	н		м	н		м	н		м	н		
Si	ze		1.1		L .	1.1		L	1.1		L	1.1		L	1.1		L.	1.1		L	1.1			1.1		L	1.1			
22	cm	1	2	3	2	3	4	3	4	5	4	5	-	5	-	-	-	-	-	-	-	-	-	-	-	-	-			
23	cm	1	2	3	2	3	4	3	4	5	4	5	6	5	6	-	6	-	-	-	-	-	-	-	-	-	-			
24	cm	1	2	3	2	3	4	3	4	5	4	5	6	5	6	-	6	-	-	-	-	-	-	-	-	-	-			
25	cm	1	2	3	2	3	4	3	4	5	4	5	6	5	6	7	6	7	-	7	-	-	-	-	-	-	-			
26	cm	1	2	3	2	3	4	3	4	5	4	5	6	5	6	7	6	7	-	7	-	-	-	-	-	-	-			
27	cm	1	2	3	2	3	4	3	4	5	4	5	6	5	6	7	6	7	-	7	-	-	-	-	-	-	-			
28	cm	1	2	3	2	3	4	3	4	5	4	5	6	5	6	7	6	7	8	7	8	9	8	9	9	9	-			
29	cm	1	2	3	2	3	4	3	4	5	4	5	6	5	6	7	6	7	8	7	8	9	8	9	9	9	-			

NOTE: Increasing category numbers indicate increased keel response. FOR BILATERAL PATIENTS: Increase by one category for added stability.



available (page 52)

1X998 To avoid damage to the pyramid during trials

 $\langle \mathbf{O} \rangle$ 

Footshell (including Spectra sock & cap) to be ordered separately. Two colors



# RUSH ROMPOGE LP

 ★
 1
 2
 3
 4
 □
 □

 166 kg
 □
 □
 □
 □

TABLE OF CONTENTS SYNSYS

KNEES ANKLES FEET

COMPONENTS LIN

LINERS & SOCKETS ORTHOSIS

SIS MATERIALS

#### Innovation you can feel

Thanks to the unique sole plate and virtually indestructible glass composite, the RAMPAGE LP<sup>®</sup> delivers the smoothest transition from heel strike to toe-off of any prosthetic foot in the industry. Patients will experience unparalleled comfort, range of motion and zero dead spots in every step.

- Low-profile build
- Superior ground compliance
- Smooth roll-over
- High-energy return
- Cosmesis-friendly
- All-terrain
- Waterproof (fresh or salt water)
- Reduced socket issues

#### **TECHNICAL FEATURES**

		RUSH RAMPAGE LP
Weight (Size 25 without	foot shell)	538 g / 1.186 lbs
	22 - 24	114 mm / 4.5"
Built Height including footshell	25 - 27	121 mm / 4.75"
	28 - 29	121 mm / 4.75"
Heel rise		10 mm / 3/8"

							Cat	egor	y sel	ectic	on ac	cord	ing t	o act	tivity	, wei	ght a	and s	ize										
Weight	kg		0-48	;	4	49-64	4	(	64-79	9	8	30-9	5		96-11	1	1	12-12	7	12	28-14	3	14	44-15	59	16	60-16	6	]
weight	lbs		0-105	5	10	06-14	0	1	41-17	5	1.	76-21	0	2	11-24	15	24	16-28	80	2	81-31	5	3	16-35	50	3	51-36	65	L = Low
Activit	ty level		м	н		м	н		м	н		м	н	L	м	н		м	н		м	н		м	н		м	н	M = Mee
Si	ze		1.1			1.1			1.1		-	1.1		Ľ	1.1		Ľ	1.1		L	1.1		L .	1.1		L	1.1		H = Hig
22	cm	1	2	3	2	3	4	3	4	-	4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
23	cm	1	2	3	2	3	4	3	4	5	4	5	-	5	-	-	-	-	-	-	-	-	-	-	-	-	-		
24	cm	1	2	3	2	3	4	3	4	5	4	5	-	5	-	-	-	-	-	-	-	-	-	-	-	-	-		
25	cm	1	2	3	2	3	4	3	4	5	4	5	6	5	6	7	6	7	-	7	-	-	-	-	-	-	-		
26	cm	1	2	3	2	3	4	3	4	5	4	5	6	5	6	7	6	7	8	7	8	-	8	-	-	-	-		
27	cm	1	2	3	2	3	4	3	4	5	4	5	6	5	6	7	6	7	8	7	8	-	8	-	-	-	-		
28	cm	1	2	3	2	3	4	3	4	5	4	5	6	5	6	7	6	7	8	7	8	9	8	9	9	9	-		
29	cm	1	2	3	2	3	4	3	4	5	4	5	6	5	6	7	6	7	8	7	8	9	8	9	9	9	-		

NOTE: Increasing category numbers indicate increased keel response. FOR BILATERAL PATIENTS: Increase by one category for added stability.



available (page 52)

1X998 To avoid damage to the pyramid during trials









### RUSH ROGUE 2

SYNSYS



TABLE OF CONTENTS

KNEES ANKLES FEET

COMPONENTS LINERS & SOCKETS

ETS ORTHOSIS

5 MATERIALS







Footshell (including Spectra sock & cap) to be ordered separately. Two colors available (page 52)



 $\langle \mathbf{O} \rangle$ 

### Increased performance. Increased comfort. Added torsion.

RUSH Rogue<sup>®</sup>2 provides the most realistic and dynamic foot and ankle motion available. The Vertical Loading Pylon provides comfortable relief from high impact loading allowing the user to push the foot to the limits. The components are made of advanced fiberglass composite which is three times more flexible than most conventional prosthetic feet. The roll through characteristics of the foot provide exceptional energy return with no "dead spot" allowing users to push themselves to the limits on the court or in aggressive terrain.

- Vertical Loading Pylon for vertical shock relief and impact absorption.
- Smooth roll through for high energy return and comfortable in any situation.
- Biomimetic ankle action to simulate the human foot no one will know you wear a prosthetic.
- Extreme reliability for extended use in any high impact application a human can survive.
- Rotational torsion relief to ease the impact to knee, hip and back. (± 15°)

#### **TECHNICAL FEATURES**

		RUSH ROGUE 2
Weight (Siz	e 25 without foot shell)	760 g / 1.67 lbs
	22 -24	155 mm / 6.1"
Build Height including Foot shell	25 - 27	168 mm / 6.61"
	28 - 29	171 mm / 6.73"
	Heel rise	10 mm / 3/8"

							Cat	egor	y sel	ectic	on ac	cord	ing t	o ac	tivity	, wei	ght a	and s	ize										
	kg		0-48	;	4	49-64	4	(	64-79	9	;	80-9	5		96-11	1	1	12-12	7	12	28-14	3	14	44-15	59	10	50-16	6	
Weight	Lbs		0-105	5	10	06-14	10	1	41-17	5	1	76-21	0	2	11-24	5	24	16-28	30	2	81-31	5	3	16-35	50	3	51-36	5	L = Low
Activit	ty level		м	н		м	н		м	н		м	н		м	н		м	н		м	н		м	н		м	н	M = Medium
Si	ze	L	1*1			1*1		L	1*1			1*1		L	1*1			1*1		L	1*1		L	1*1		L	1*1		H = High
22	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	-	-	-	-	-	-	-	-	-	-	-	-	-	
23	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	-	-	-	-	-	-	-	-	-	-	-	-	-	
24	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	6	6	6	-	-	-	-	-	-	-	-	-	-	
25	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	6	6	6	7	7	7	-	-	-	-	-	-	-	
26	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	6	6	6	7	7	7	-	-	-	-	-	-	-	
27	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	6	6	6	7	7	7	8	8	8	9	9	9	-	
28	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	6	6	6	7	7	7	8	8	8	9	9	9	-	
29	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	6	6	6	7	7	7	8	8	8	9	9	9	-	

NOTE: Increasing category numbers indicate increased keel response. FOR BILATERAL PATIENTS: Increase by one category for added stability.







## RUSH evaq8

SYNSYS

**KNEES** 

ANKLES

FEET

### Simplistic, effective, efficient

COMPONENTS

Finally, an unprecedented elevated vacuum system that seamlessly integrates effective vacuum with the same rugged simplicity of all the RUSH Foot<sup>®</sup> designs. The RUSH Foot EVAQ8 Collection is the easy solution to providing maximum vacuum efficiency in just a few quick steps. No batteries or complicated, mechanical pump required.

ORTHOSIS

MATERIALS

- Simple, integrated design.
- Stabilizes volume, increases linkage, and heightens proprioception through elevated vacuum suspension.
- All-terrain, fully-submersible.
- Requires minimal maintenance.
- The RUSH FOOT EVAQ8 Collection is available in the HiPro, Rogue 2, RAMPAGE and RAMPAGE LP models.

**LINERS & SOCKETS** 

#### **TECHNICAL FEATURES**

		HIPRO EVAQ8	ROGUE 2 EVAQ8	RAMPAGE EVAQ8	RAMPAGE LP EVAQ8
Weig (Size 25 withou		658 g / 1.45 lbs	770 g / 1.70 lbs	593 g / 1.31 lbs	549 g / 1.21 lbs
	22 -24	6.5" / 165 mm	6.1″ / 155 mm	6.625" / 168mm	4.5″ / 114 mm
Build Height	25 - 27	6.875" / 175 mm	6.61" / 168 mm	7.15" / 181mm	4.75″ / 121 mm
	28 - 29	7.125″ / 181 mm	6.73" / 171 mm	7.25" / 184mm	4.75" / 121 mm
Heel r	ise		10 mm	/ 3/8"	
Category	/1-9	See Hipro page	See Rogue2 page	See Rampage page	See Rampage LP page



- 1 Release Valve
  90° Hose Barb
- 2' Tygon Vacuum Hose
- Hose Barb Filter
- 1/2" Wide Hook & Loop



#### ASSEMBLY AND INSTALLATION

The RUSH FOOT EVQ8 system comes preassembled inside the heel of the RUSH FOOT. Please specify the foot side (Right or left) when ordering.

 Footshell (including Spectra sock & cap) to be ordered separately. Two colors available (page 52)





**#HUMANFIRST** 







TABLE OF CONTENTS

### RUSH H2O


SYNSYS

TABLE OF CONTENTS

KNEES ANKLES FEET

COMPONENTS LINERS & SOCKETS

ORTHOSIS MATERIALS






The RUSH Foot® H2O collection is the ideal foot for your shower leg or various, non-invasive water sport activities. Available in the tried-and-true RUSH Foot® HiPro, RAMPAGE, RAMPAGE LP and Rogue 2 models and featuring an integrated Vibram® sole and custom molded rubber toe wrap. The RUSH Foot® H2O collection of feet offer the same great durability and comfort of all the other RUSH feet, but now adds superior traction on slick surfaces. From the shower to the pool, you won't find a foot that provides this amount of grip and added confidence on slippery surfaces.

- Showering
- Pool Activities
- Surfing
- Kayaking
- Stand Up Paddle
- Boarding

- Indoor Yoga
- Karate
- Gymnastics
- Miscellaneous
- Barefoot Activities

		HIPRO H2O	ROGUE 2 H2O	RAMPAGE H2O	RAMPAGE LP H2O
Weigh	t (Size 25)	742 g / 1.64 lbs	850 g / 1.87 lbs	669 g / 1.47 lbs	625.5 g / 1.38 lbs
	Size		22 - 2	29 cm	
	22 - 24	152 mm / 6"	142 mm / 5.59"	159 mm / 6.25"	105 mm / 4.125"
Build Height	25 - 27	159 mm / 6.25"	152 mm / 5.98"	165 mm / 6.5"	105 mm /4.125"
	28 - 29	175 mm / 6.875	165 mm / 6.50"	178 mm / 7"	111 mm / 4.375"
Cate	gory 1 - 9	See Hipro page	See Rogue2 page	See Rampage page	See Rampage LP page











# RUSH ROVER

KNEES ANKLES FEET


COMPONENTS LINE

Extraordinary adventures begin with the ROVER

sidewalks of a concrete jungle, navigate even the most demanding terrain with ease.

LINERS & SOCKETS ORTHOSIS

With a clearance just over two inches, even the most extreme low or high clearance patients will benefit from the dynamic toe-off and superior energy return of the RUSH ROVER<sup>®</sup>. Capable. Strong. Comfortable. From rocky trailheads to the





• Smooth Roll-Through.

- Dynamic Toe-Off.
- Most Durable Low-Profile Foot Available.

RUSH ROVER<sup>®</sup>...the world is yours...go live it!

- All-terrain, all-weather
- Waterproof (salt and fresh)

		RUSH ROVER
Weight (Size 25 v	without foot shell)	639 g / 1.41 lbs
	22 -24	54 mm / 2.125"
Build Height	25 - 27	60 mm / 2.37"
	28 - 30	64 mm / 2.5"
Heel	rise	10 mm / 3/8"
Heel	rise	IU mm / 3/8

							Cat	egor	y sel	ectio	on ac	cord	ing t	o ac	tivity	, wei	ght a	and s	ize										
Weight	kg		0-48	3	4	49-64	4	(	64-79	9	1	30-9	5		96-11	1	1	12-12	7	12	28-14	3	1.	44-15	59	16	60-16	6	
weight	lbs		0-10	5	10	06-14	0	1	41-17	5	1	76-21	0	2	11-24	15	24	46-28	30	2	81-31	15	3	16-35	50	3	51-36	65	
Activit	y level		м	н		м	н		м	н		м	н		м	н		м	н		м	н		м	н		м	н	
Si	ze		1*1		L	1*1		L	1*1	п		1*1		L .	1*1		L	1*1		L	1*1		L .	1*1		L	1*1		L: M
22	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	-	-	-	-	-	-	-	-	-	-	-	-	-	H H
23	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	-	-	-	-	-	-	-	-	-	-	-	-	-	
24	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	6	6	6	-	-	-	-	-	-	-	-	-	-	
25	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	6	6	6	7	7	7	-	-	-	-	-	-	-	
26	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	6	6	6	7	7	7	-	-	-	-	-	-	-	
27	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	6	6	6	7	7	7	8	8	8	9	9	9	-	
28	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	6	6	6	7	7	7	8	8	8	9	9	9	-	
29	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	6	6	6	7	7	7	8	8	8	9	9	9	-	
30	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	6	6	6	7	7	7	8	8	8	9	9	9	-	

L = Low M = Medium H = High

 Footshell (including Spectra sock & cap) to be ordered separately. Two colors available (page 52)

ROV- - -RU

Category

**Size** 22-30

1X998 To avoid damage to the pyramid during trials

# PROTEOR

#HUMANFIRST

NOTE: Increasing category numbers indicate increased keel response. FOR BILATERAL PATIENTS: Increase by one category for added stability.



### RUSH KID

SYNSYS

KNEES ANKLES FEET

COMPONENTS LINEF

LINERS & SOCKETS ORTHOSIS

#### Meet the new kid on the block

Built kid tough, the RUSH Kid® pediatric foot can handle even the most extreme low or high clearance patient. Run, jump, play...the ultra low profile build delivers the most dynamic energy return and smooth roll-through of any pediatric foot on the market today. Mud, water, sand....no problem! The all-terrain RUSH Kid® was built with active kids in mind.



KID-\_--RU size\_\_\_\_ 19-21 Category IP - 8P

 $\langle \mathbf{O} \rangle$ 



- Dynamic Toe-Off.
- Most Durable Low-Profile Foot Available.
- All-terrain, all-weather
- Waterproof (salt and fresh)

	RUSH KID
Weight Size 20 without Foot shell	315 g / 0.69 lbs
Build Height	51 mm / 2"
Size	19-21
Heel rise	10 mm / 3/8"

					C	Categ	ory	selec	tion	ассо	ording	g to a	activi	ity, w	veigh	t and	d size	9							
Weight	kg		0-14			15-20	)		21-27	7	1	28-34	1		35-4	1	4	12-48	3	4	19-54	1	!	55-61	l
weight	lbs		0-30	)		31-45	,	2	16-60	C		61-75	;	7	76-90	)	ç	91-105	5	10	06-12	0	1:	21-13	5
Niveau c	ľactivité		м	н		м	н		м	н		м	ш		м	н		м	н		м	н		м	ш
Tai	lle	L	1*1	п	L	1*1	п	L	1*1	п	L	1*1	п	L	1*1	п	L	1*1	п	L	1*1		L	1*1	п
19 (	cm	1 <sub>P</sub>	1 <sub>P</sub>	2Р	2P	2Р	3P	ЗP	ЗP	4P	4P	4P	5р	5р	5р	6Р	6Р	6Р	-	-	-	-	-	-	-
20	cm	-	-	2Р	2Р	2Р	ЗP	ЗP	ЗP	4P	4P	4P	5р	5р	5р	6Р	6Р	6Р	7р	7р	7р	-	-	-	-
21 0	cm	-	-	2Р	2P	2Р	3P	ЗP	ЗP	4P	4P	4P	5р	5р	5р	6Р	6Р	6Р	7р	7р	7р	8P	8P	8p	-

L = Low M = Medium H = High

NOTE: Increasing category numbers indicate increased keel response. FOR BILATERAL PATIENTS: Increase by one category for added stability.

#### PEDIATRIC COMPONENTS COMPATIBLE WITH RUSH KID



1G08



available (page 52)

Footshell (including Spectra sock & cap)

to be ordered separately. Two colors

1X998 To avoid damage to the pyramid during trials



46

### RUSH CHOPORT

TABLE OF CONTENTS SYNSYS

KNEES ANKLES FEET

COMPONENTS LINERS & SOCKETS

ORTHOSIS MATERIALS

<u>×</u>1234 <u>166 kg</u> 2351bs 2 ☆

# RUSH Comment &

### Virtually indestructible


The RUSH Chopart<sup>®</sup> is specifically designed for people with Chopart amputations as well as Lisfranc, Pirogoff, Boyd and partial foot prostheses. A dynamic design, providing increased reliability and eliminating the breakage commonly seen with carbon Chopart plates. The unique glass composite is engineered to be more flexible and durable than any other Chopart available today.

• Highly-dynamic.

• Durable.

- Smooth roll-over.
- Waterproof (fresh or salt water).

		RUSH CHOPART
Weight (Size 25 v	vithout Foot shell)	118 g / 0.26 lbs
	19 - 21	21 mm / 0.84"
Duild Llaight	22 -24	25 mm / 1"
Build Height	25 - 27	29 mm / 1.125"
	28 - 30	22 mm / .875"
Heel	rise	10 mm 3/8"



Delivered with a bonding kit

							Cat	egor	y sel	ectio	on ac	cord	ing t	o ac	tivity	, wei	ght a	and s	ize									
M/aight	ka		0-48	3	4	49-64	4	(	54-79	9	8	30-9	5		96-11	1	1	12-12	7	12	28-14	3	14	44-15	9	16	60-16	66
Weight	lbs		0-10	5	10	06-14	0	1.	<u>41-17</u>	5	1	76-21	0	2	11-24	5	24	16-28	30	2	81-31	15	3	16-35	50	3	51-36	55
Activit	ty level		м	н		м	н		м	н		м	н		м	н		м	н		м	н		м	н		м	н
Si	ze	L	1*1		L	1*1		L	1*1	п	L	1*1		L	1*1			1*1		L	1*1		L	1*1		L	1*1	
22	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	-	-	-	-	-	-	-	-	-	-	-	-	-
23	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	-	-	-	-	-	-	-	-	-	-	-	-	-
24	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	6	6	6	-	-	-	-	-	-	-	-	-	-
25	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	6	6	6	7	7	7	-	-	-	-	-	-	-
26	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	6	6	6	7	7	7	-	-	-	-	-	-	-
27	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	6	6	6	7	7	7	8	8	8	9	9	9	-
28	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	6	6	6	7	7	7	8	8	8	9	9	9	-
29	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	6	6	6	7	7	7	8	8	8	9	9	9	-
30	cm	1	1	2	2	2	3	3	3	4	4	4	5	5	5	6	6	6	7	7	7	8	8	8	9	9	9	-

	Category selection according to activity, weight and size																								
Woight	Waight kg 0-14				1	15-20	)	21-27		28-34			35-4	1	42-48		3	49-54		1	55-61		1		
weight	Weight Ibs 0-14			)		31-45	;	2	16-60	2		61-75	;	7	6-90	)	ç	91-10	5	10	06-12	0	1.	21-13	5
Niveau c	ďactivité		м	н		м	н		м	н		м	н		м	н		м	ш		м	н		м	н
Tai	ille	L	1*1		L	1*1	п	L	1*1	п	L	1*1	п	L	1*1	п		1*1	п	L	1*1	п	L .	1*1	п
19 0	cm	1 <sub>P</sub>	<b>1</b> P	2Р	2Р	2Р	3Р	3P	ЗP	4P	4P	4P	5Р	5р	5р	6Р	6Р	6Р	-	-	-	-	-	-	-
20	cm	-	-	2Р	2Р	2Р	ЗP	ЗP	ЗP	4P	4P	4P	5Р	5р	5р	6Р	6Р	6Р	7р	7Р	7р	-	-	-	-
21 (	cm	-	-	2P	2P	2P	ЗP	ЗP	ЗP	4Р	4P	4P	5р	5р	5р	6р	6р	6р	7р	7р	7р	8p	8p	8p	-
	IOTE: Instructing antagent numbers indicate instructed load response FOR PULATEDAL DATIENTS: Instructs by one antagent for added stability																								

NOTE: Increasing category numbers indicate increased keel response. FOR BILATERAL PATIENTS: Increase by one category for added stability.



available (page 52)

#### **#HUMANFIRST**



 $\langle \mathbf{o} \rangle$ 

Footshell (including Spectra sock & cap) to be ordered separately. Two colors

## DYNASTEP

SYNSYS

TABLE OF CONTENTS

KNEES ANKLES FEET

COMPONENTS | LINE

LINERS & SOCKETS

ORTHOSIS MATERIALS

<u>
大
1
2
3
4
100 kg
220 lbs
</u>







#### **Comfort and dynamics**

Aided by the shape of its carbon strut, the DynaStep ensures energy savings and comfort while providing the patient with dynamics suitable to activity level 2 patients; its split toe design allows inversion and eversion while navigating uneven terrain.

- Appropriate for transtibial and transfemoral patients.
- Foam of the foot is moulded on the carbon strut.
- Comes with its malleolar clip to help the set up of the foot shell.

#### **TECHNICAL FEATURES**

Item N°.	14	101				
Activity level	2	2				
Weight (size 26)	510 g / 1.12 lbs					
Side (Right/Left)	-G ,	/ -D				
Size	22 to 25	26 to 29				
Junction plate	1D101-2225	1D101-2629				
Build Height	96 mm	/ 3.78"				
Max. Patient Weight	80 kg / 176 lbs 100 kg / 220					







### **3-PORTS FOOT**

COMPONENTS **LINERS & SOCKETS**  ORTHOSIS

MATERIALS










- Bath prostheses
- Foot amputation prostheses (Chopard, Symes, Pirogoff)
- Trans-tibial carbon prosthesis.
- XC050: Adhesive recommended to glue the 3-parts foot components
- 1A111: a SACH foot can be used if a trial prosthesis is necessary prior to alignment transfer and final prosthesis.

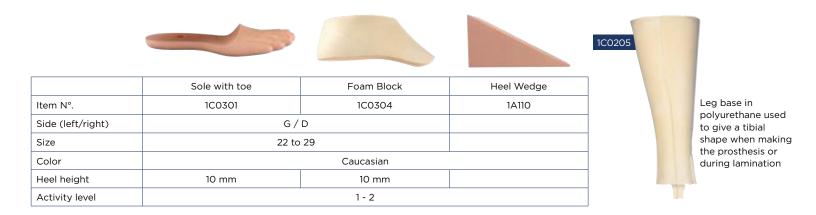









### S.C.C.H





ANKLES FEET KNEES

COMPONENTS

LINERS & SOCKETS ORTHOSIS

MATERIALS

### S.A.C.H. foot (Solid Ankle, Cushion Heel) is used for patients with low activity level

- S.A.C.H. foot provides shock absorption at heel strike thanks to heel inserts of various hardnesses
- Step completion is ensured by the flexible forefoot.





TECHNICAL FEATURES

IECHNICAE FEATO	RE5				
ltem N°.	14	4111	1A118	1A21	1A51
Patient type	٢	len	Men	Women	Children
Heel insert	Yes	Yes	Yes	Yes	No
Sandal-toe	Y	/es	Yes	No	No
Side (left/right)			G / D		
Size	22 to 25	26 to 29	22 to 29	21 to 26	12/14/16/17/18/19/20
Max. Patient weight	100 kg / 220 lbs	125 kg / 275 lbs	100 kg / 220 lbs	100 kg / 220 lbs	45 kg / 99 lbs
Weight	390 g	(size 25)	410 g (size 25)	415 g (size 22)	130 g (size 14)
Heel height (T)	10	mm	18 mm	35 mm	12 mm
Activity level			1-2		

• S.A.C.H. feet come with a medium heel insert. To optimize shock absorption at heel strike, the insert can be replaced by a softer or a harder one.

	For Item N°.	1A111 / 1A118		F	or Item N°. 1A21		[	Upper Link	
Size /Inserts	22 to 23	24 to 27	28 to 29	Size /Inserts	21 to 24	25 to 26		Multi-axis Ankle	٢
Soft	1A11120-1S	1A11120-2S	1A11120-3S	Soft	1A11120-1S	1A11120-2S		Pyramid adapter	٢
Medium	1A11120-1N	1A11120-2N	1A11120-3N	Medium	1A11120-1N	1A11120-2N		Fixed tubular base	0
Hard	1A11120-1F	1A11120-2F	1A11120-3F	Hard	1A11120-1F	1A11120-2F		Wooden base	<u></u>



Item N°.

1X998 To avoid damage to the pyramid during trials








E







SYNSYS



### Gery foot aims at providing low level users all the assistance they deserve

It greatly assists your patient's ability to ambulate with its lightweight design and accommodates heel heights ranging from 5 mm to 20 mm (.2" to .8"). The Gery is easily cleaned with water and resistant to dirt thanks to its closed cell EVA foam.

MATERIALS

- Engineered specifically for the low level activity, AK & BK population.
- Rated up to 150kg / 330lbs.
- Re-engineered with a new core.
- 1 Year warranty.
- 100% Waterproof.
- Comfort design that reduces residual limb pain.
- Lightweight EVA structure  $\approx$  30% lighter than a SACH foot !
- Easy step completion thanks to its profiled core.
- Malleolar clip included.

#### **TECHNICAL FEATURES**

Item N°.	1A2	200
Color	Caucasian	Ebony
Side (left/right)	G,	/ D
Size	22 to	29 cm
Weight (Size 25)	395g /	0.87 lbs
Build Height	82 mm	(3.22")
Heel height (T)	from 5mm to 20	) mm. (2" to .8")
Max. Patient weight	150kg /	330lbs
Activity level	1-	2
Water Resistance	Water	rproof











### FOOT SHELLS

TABLE OF CONTENTS	SYNSYS	KNEES ANKL	ES FEET	COMPONENTS	LINERS	& SOCKETS	ORTHOSIS	MATERIALS			
Foot Shells Default On request	ð	ð	ð				(The second s				
Profile	PROTEOR	RUSH	RUSH	RUSH Sandal toe	Gen 3 Mid Profile	Gen 3 Mid Profile	Gen 2 Mid Sandal toe	ShockWave Mid Profile	ShockWave Sandal toe	Kinnex 2.0 Mid Profile	Kinnex 2.0 Sandal toe
Part number	1A60020	FS	FSK	FTC-4R-1	FTC-3M-0	FTC-3M-1	FTC-2M-1	FTC-3F-1	FTC-2F-1	FTC-3K-1	FTC-2K-1
Сар	Yes	Yes	Yes	No	Yes	No	No	No	No	No	No
Size	22 to 30	22 to 29	19 to 30	22 to 29	22 to 31	22 to 31	22 to 28	23 to 30	23 to 28	24 to 30	22 to 30
Skin Tone	Caucasian or Ebony	Light c	or Dark				🛑 Light or 🛑 M	edium or <b>O</b> ark			
Тое	Regular	Regular	Regular	Sandal	Regular	Regular	Sandal	Regular	Sandal	Regular	Sandal
Side	G or D	L or R	L or R				Lo	r R			
Kinnex 2.0										•	•
Kinterra *											•
Dynadapt					•	0	•				
Agilix					•	0	•				
Sierra					•	0	•				
Pacifica & LP					•	0	•				
Highlander & Max					•	0	•				
Exalto					•	0					
ShockWave								•	٠		
RUSH Hipro		•			Item N° for						
RUSH Rampage		•			PROTEOR For	ot suitable Footsh					
RUSH Rampage LP		•			Caucasian		Item N° f			n N° for	
RUSH Hipro Rogue 2		•		•	1A6002			ot suitable Footsh		bon Foot suitable	Footsnell
RUSH EVAQ8 Collection		•				Side 22-3		_ <b>-</b>		<u> </u>	4
RUSH Rover			•		EDONY	t / D- right	Part numb	Size L- I	e Pa eft	rt number Size 22-31	<b>Toe</b> ── <b>Side</b> R- regular L- le S- sandal R- r
RUSH Kid			٠		1A6002			Ski	right n tone	Ski	n tone
RUSH Chopart		•	19-20-21-30		G- lof	Side Size 51 / D- right		1 - I 3- 0	light dark	M-	ight medium Ebonv
Dyna C	•				LG= lei	cy b light				D-	Еропу
Dynatrek	•			1							
Dynastar	•			1							
Dynacity	•			1	-	(I)	ACC-00-10300-0	00			







### **SPECTRA SOCKS & BUMPERS**

COMPONENTS

KNEES ANKLES FEET

							S	PECTRA SOCKS						
PRODUCT	BUMPERS	Size	19/21	22	23	24	25	26	27	28	29	30	31	
Kinnex 2.0	KIT-00-1140U-00	Color	-	-	-		S0-F14-00025-00						-	
Kinterra	KIT-00-1147U-00		-			1	1		1		SO-NPS-2	20040-00	-	
Dynadapt	KIT-00-1137U-00		-	-										
Agilix	KIT-00-1137U-00		-		SO-NPS-2	20030-00								
Sierra	KIT-00-1135U-00		-											
Pacifica	KIT-00-1134U-00			-	- S0-NPS-20030-00 S0-NPS-20035-00							S0-NPS-20040-00		
Pacifica LP	KIT-00-1132U-00	$\bullet$	-											
Highlander & Max	KIT-00-1130U-00		-		S0-NPS-20030-00									
Exalto	KIT-00-1148U-00		-											
ShockWave	KIT-00-1146U-00			-		SO-NPS-20030-00					SO-NPS-2	20040-00	-	
Rush Rogue II	-		-										-	
Rush HiPro	-		-				SO-NPS-	20035-00					-	
Rush Rampage	-		-				30 11 3 2						-	
Rush Rampage LP	-		-										-	
Rush Chopart	-	•					SO-NPS-2	20030-00					-	
Rush Kid/Rover	-	•											-	
Dynatrek	40 sha 1A60004	•	-	-										
2 ,	50 sha 1A60005	•	-	-										
Dyna C		•	-	-				1A40	0021-N					
Dynastar	KIT-00-1146U-00	•	-	-										
Dynacity			-											

LINERS & SOCKETS

ORTHOSIS


MATERIALS



TABLE OF CONTENTS

SYNSYS

### COMPONENTS

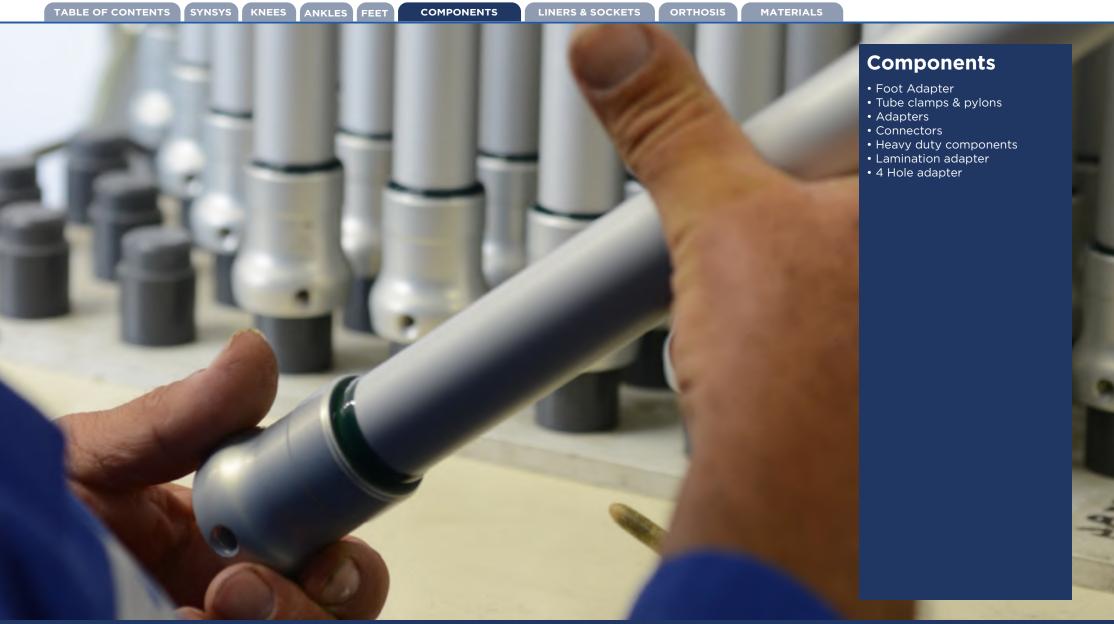



### FOOT **ADAPTER**

SYNSYS

#### KNEES ANKLES FEET

COMPONENTS

LINERS & SOCKETS

ORTHOSIS MATERIALS

#### Pyramid base

• Pyramid bases are convenient for any foot receiving a M10 screw (or M6 for 1D38), they provide adjustment of equinus and inversion/eversion of the foot

	ltem N°.	Designation	Max Patient Weight	Material	Weight	Connection	ТН	вн
4	1D38	Aluminun and stainless steel PYRAMID BASE	45 Kg / 99 lbs	Aluminum + Steele	45 g / 0.10 lbs	Male pyramid M36 screw	18 mm / 0.71"	7 mm / 0.28"
	1D43	Aluminum PYRAMID BASE	100 kg / 220 lbs	Aluminum	100 g / 0.22 lbs	Male pyramid M10 screw	23 mm / 0.90"	7 mm / 0.28"
*	1D44	Stainless steel PYRAMID BASE	125 kg / 275 lbs	Stainless steel	130 g / 0.29 lbs	Male pyramid M10 screw	21 mm / 0.83"	7 mm / 0.28"
	1D48	Titanium PYRAMID BASE	100 kg / 220 lbs	Titanium	90 g / 0.20 lbs	Male pyramid M10 screw	24 mm / 0.94"	7 mm / 0.28"

### **Tubular base**

• Tubular bases are convenient for any foot receiving a M10 screw.

Item N°.	Designation	Max Patient Weight	Material	Weight	Screw	ТН	ВН
1D05	Fixed Base	100 kg / 220 lbs	Aluminum	140 g / 0.31 lbs	M10 screw	41 mm / 1.61"	7 mm / 0.28"
1D07	Base with Notch Type Equinus Adjustment: 7 × 3°	100 kg / 220 lbs	Aluminum	200 g / 0.44 lbs	M10 screw	59 mm / 2.32"	25 mm / 0.98"







### FOOT **ADAPter**

SYNSYS

TABLE OF CONTENTS

KNEES ANKLES FEET

COMPONENTS

LINERS & SOCKETS

ORTHOSIS MATERIALS

#### Wooden bases

• Wood bases for exoskeletal prosthesis are convenient for any foot receiving a M10 or M8 or M6 screw, they provide adjustment of equinus and inversion/eversion of the foot

ltem N°.	Designation	Max Patient Weight	Material	Weight	Connection	ТН
1D60	For Male S.A.C.H. Foot from 22 to 25 cm	100 kg / 220 lbs	Wood + Steele	480 g / 1.06 lbs	M10 screw	130 mm / 5.12"
1D61	For Male S.A.C.H. Foot from 26 to 29 cm	100 kg / 220 lbs	Wood + Steele	500 g / 1.10 lbs	M10 screw	130 mm / 5.12"
1D63	For Female S.A.C.H. Foot from 21 to 26 cm	80 kg / 176 lbs	Wood + Steele	440 g / 0.97 lbs	M8 screw	130 mm / 5.12"
1D64	For Children S.A.C.H. Foot from 12 to 20 cm	60 kg / 132 lbs	Wood + Steele	250 g / 0.55 lbs	M6 screw	100 mm / 3.94"







# TUBE CLAMPS AND PYLONS

TABLE OF CONTENTS SYNSYS

KNEES ANKLES FEET

COMPONENTS

LINERS & SOCKETS

MATERIALS ORTHOSIS

#### **Tube Clamps and Pylons**

		ltem N°.	Designation	Max Patient Weight	Material	Weight	Total Height	Build Height
€€		1D52	Tube Ø 30 mm with Pyramid Receiver	100 Kg / 220 lbs	Aluminum	111 g / 0.24 lbs	130 mm / 5.12"	63 mm / 2.48"
E		1D52-P6	Tube Ø 34 mm with Pyramid Receiver	125 kg / 275 lbs /	Aluminum	121 g / 0.27 lbs	130 mm / 5.12"	67 mm / 2.64"
E		1D45	Ø 30 mm Aluminum tube with bonded aluminum Pyramid Receiver.	100 kg / 220 lbs	Aluminum	290 g / 0.64 lbs	440 mm / 17.32"	440 mm / 17.32"
:€	-	1D46	Ø 30 mm Aluminum tube with bonded titanium fe- male pyramid adapter.	100 kg / 220 lbs	Aluminum + Titanium	280 g / 0.62 lbs	440 mm / 17.32"	440 mm / 17.32"
:€		1G01	Aluminium Tube - Ø 30 mm - 420 mm length	100 kg / 220 lbs	Aluminum	200 g / 0.44 lbs	420 mm / 16.54"	-
E		1G0120	Aluminium tube Ø 30 mm - 200 mm length	100 kg / 220 lbs	Aluminum	95 g / 0.21 lbs	200 mm / 7.87''	-
E		1G01-HD	Aluminum tube Ø 34 mm - 420 mm length	150 kg / 330 lbs	Aluminum	235 g / 0.52 lbs	420 mm / 16.54"	-
.ε		1G07	Aluminum tube Ø 22 mm - 300 mm length used for pediatric prosthesis	45 kg / 99 lbs	Aluminum	105 g / 0.23 lbs	300 mm / 11.81"	-
		1G08	Aluminum tube Ø 22 mm - 254 mm length used for pediatric prosthesis	60 kg / 132 lbs	Aluminum	105 g / 0.23 lbs	254 mm / 10"	
CE II		ACC-00- 20203-00	Carbon Pylon/Tube	226 kg / 500 lbs	Graphite	NC	305 mm / 12''	-

#### Adapter ring

	ltem N°.	Designation	Max Patient Weight	Material	Weight	Total Height	Diameter
	1X69	Designed for mounting components on tubes of	100 kg / 220 lbs	Aluminum	29 g / 0.06 lbs	34 mm / 1.34"	from 30 to 22 mm from 1.18" to 0.87"
CE	1X70	different diameters.	100 kg / 220 lbs	Aluminum	20 g / 0.04 lbs	34 mm / 1.34"	from 30 to 25 mm from 1.18" to 0.98"





### **ODOPTERS**

SYNSYS

TABLE OF CONTENTS

KNEES ANKLES FEET

COMPONENTS

LINERS & SOCKETS

MATERIALS

ORTHOSIS

### **Tube Clamp Adapters**

		ltem N°.	Designation	Max Patient Weight	Material	Weight	Total Height	Build Height
CE	a a a a a a a a a a a a a a a a a a a	1D39	Pediatric Tube Clamp Adapter with pyramid receiver used with the Ø 22 mm tube for child prosthesis.	45 kg / 99 lbs	Aluminum	45 g / 0.1 lbs	38 mm / 1.5"	12 mm / 0.47"
CE		1D40	Tube Clamp Adapter with pyramid receiver for tightening on $\emptyset$ 30 mm tube.	100 kg / 220 lbs	Titanium	90 g / 0.2 lbs	50 mm / 1.97"	16 mm / 0.63"
CE		1D41	Tube Clamp Adapter with pyramid receiver for tightening on $\emptyset$ 30 mm tube.	100 kg / 220 lbs	Aluminum	109 g / 0.24 lbs	47 mm / 1.85"	13 mm / 0.52"
CE		1D41-HD	Tube Clamp Adapter with pyramid receiver for tightening on $\emptyset$ 34 mm tube.	150 kg / 330 lbs	Aluminum	120 g / 0.26 lbs	55 mm / 2.17"	17 mm / 0.67"
(( []i		ACC-00-20201-00	Tube Clamp 34 mm	226 kg / 500 lbs	Titanium	NC	NC	NC
CE	۲	1K182	Threaded Pyramid insert M36 x 1,5 mm	125 kg / 275 lbs	Stainless Steel	65 g / 0.14 lbs	28 mm / 1.10"	6 mm / 0.24"
CE		1K183	Rotating Pyramid Receiver M 36 x 1,5 mm Use with 1K179 or 1S145	150 kg / 330 lbs	Stainless Steel	75 g / 0.17 lbs	23 mm / 0.91"	14 mm / 0.55"
CE	Ma	1K184	Threaded Pyramid For screwing on 1P200-KD, 1P320-KD, 1P321-KD, 1P360-KD, 1P131-KD, 1P180-KD	125 kg / 275 lbs	Stainless Steel	94 g / 0.21 lbs	30 mm / 1.18"	15 mm / 0.59"









### CONNECTORS

SYNSYS

TABLE OF CONTENTS

KNEES ANKLES FEET

COMPONENTS

LINERS & SOCKETS

ORTHOSIS MATERIALS

### **Double Adapters**

		ltem N°.	Designation	Max Patient Weight	Material	Weight	Total Height	Build Height
		1K207-032				85 g / 0.19 lbs	32 mm / 1.26"	32 mm / 1.26"
		1K207-045	Double Pyramid Receiver.	100 kg / 220 lbs	Aluminum	100 g / 0.22 lbs	45 mm / 1.77"	45 mm / 1.77"
CE		1K207-060	Avoid using a tube in tight spaces	100 kg / 220 lbs	Aluminum	115 g / 0.25 lbs	60 mm / 2.36"	60 mm / 2.36"
		1K207-075				130 g / 0.29 lbs	75 mm / 2.95"	75 mm / 2.95"
CE		1K207-032-HD	Double Pyramid Receiver.	150 kg / 330 lbs	Aluminum	100 g / 0.22 lbs	32 mm / 1.26"	32 mm / 1.26"
	<b>0 0</b>	1K207-045-HD	Avoid using a tube in tight spaces	130 kg / 330 lbs	Aluminum	130 g / 0.29 lbs	45 mm / 1.77"	45 mm / 1.77"
CE		1K190	Double Pyramid Adapter	150 kg / 330 lbs	Stainless Steel	120 g / 0.27 lbs	36 mm / 1.42"	7 mm / 0.28"
CE		1K150	Double adapter including two pyramid receivers. Can be adjusted in height by shortening, which allows the CPO to ac- curately adjust the prosthesis height. It can also provide rotation adjustment.	100 kg / 220 lbs	Stainless Steel + Aluminum	up to 390 g up to 0.86 lbs	40 to 100 mm 1.57 " to 3.94"	40 to 100 mm 1.57 " to 3.94"
CE		1K155	Threaded tube alone	150 kg / 330 lbs	Stainless Steel	292 g / 0.64 lbs	40 to 86 mm 1.57 " to 3.39"	40 to 86 mm 1.57 " to 3.39"
CE		1K151	Double adapter including a pyramid re- ceiver and a pyramid. It allows for indivi- dual height adjustment of the prosthe- sis as its height can be shortened.	100 kg / 220 lbs	Stainless Steel	up to 403 g up to 0.89 lbs	64 to 109 mm 2.52" to 4.29"	44 to 94 mm 1.73" to 3.70"









### CONNECTORS

SYNSYS

ANKLES FEET COMPONENTS

LINERS & SOCKETS

MATERIALS

ORTHOSIS

#### **Connectors for Proteor knees**

These connectors are necessary for the assembly of PROTEOR knees: 1M01 - 1M01-P6 - 1M10 - 1M10-P6 - 1M102 - 1M102-P6 - 1M102V - 1M102V-P6 - 1M112 - 1M113

This specific connection system allows you to select the most appropriate linking piece between the knee and the socket. The simplified shape of the upper part of the knee can receive the proximal linking piece using a M8 screw. The knees listed above must be ordered together with one of the following connectors. All these connectors provide a ± 15° socket rotation.

		ltem N°.	Designation	Max Patient Weight	Material	Weight	Connection	Total Height	Build Height	Knee
C€	*	1K160	Pyramid Connector provides the male pyramid connection.	100 kg 220 lbs	Aluminum + Stainless Steel	70 g 0.15 lbs			7 mm 0.27"	1M01 1M10 1M102 1M102V 1M113
CE	*	1K160-P6	Pyramid Connector for 125 kg knee provides the male pyramid connection.	125 kg 275 lbs	Aluminum + Stainless Steel	90 g 0.2 lbs	M8	30 mm 1.18''	8 mm	1M01-P6 1M10-P6 1M102-P6 1M102V-P6
CE	*	1K163	Pyramid Connector provides the male pyramid connection.	100 kg 220 lbs	Stainless Steel	100 g 0.22 lbs			0.31"	1M01 1M10 1M102 1M102V 1M113
CE	*	1K164	Pediatric Pyramid Connector provides the male py- ramid connection to the 1M112 knee	45 kg 99 lbs	Stainless Steel	86 g 0.19 lbs g		21 mm 0.83"	9 mm 0.35"	1M112
		1K20	This Ø 30 mm Tube Clamp provides a long and lightweight link between the knee and a short residual limb socket. To be assembled using Adapter 1K14	100 kg 220 lbs	Aluminum + Steel	210 g 0.46 lbs	Tube Ø 30 mm M8	218 mm 8.58"	210 mm 8.27"	
CE	diş.	1K3O	Aluminum Linking plate is convenient for assembly to the distal end of a transfemoral socket with Euro- pean 4-hole pattern	100 kg 220 lbs	Aluminum	80 g 0.18 lbs	M8	21 mm 0.83"	13 mm 0.51"	







# HEAVY DUTY COMPONENTS

TABLE OF CONTENTS

KNEES ANKLES FEET

COMPONENTS

LINERS & SOCKETS ORTHOSIS

MATERIALS

#### Heavy duty components

SYNSYS

	ltem N°.	Designation	Max Patient Weight	Material
	ACC-00-20201-00	Tube Clamp 34 mm	226 kg / 500 lbs	Titanium
1	ACC-00-20202-00	4 Ear Connector for 34 mm System	226 kg / 500 lbs	Titanium
	ACC-00-20203-00	Carbon Pylon/Tube 305 mm / 12″ length	226 kg / 500 lbs	Graphite
	KIT-00-20200-00	Complete Kit ACC-00-20201-00 + ACC-00-20202-00 + ACC-00-20203-00	226 kg / 500 lbs	







# Lamination adapter

 TABLE OF CONTENTS
 SYNSYS
 KNEES
 ANKLES
 FEET
 COMPONENTS
 LINERS & SOCKETS

 Lamination adapters.

	ltem N°.	Designation	Max Patient Weight	Material	Weight	Total Height	Build Height
	1K40	40       Used for knee disarticulation or long residual limb. M8 connection J. Bracket         73       3-prong anchor with pyramid.         76       3-prong anchor with rotating receiver.         77       3-prong anchor with rotating pyramid.         77       3-prong anchor with rotating pyramid.         77       3-prong anchor with rotating pyramid.         78       3-prong anchor with rotating pyramid.		Stainless Steel	120 g 0.26 lbs	120 mm 4.72"	6.5 mm 0.24"
	1K173	3-prong anchor with pyramid.	125 kg	Stainless Steel	150 g 0.33 lbs	65 mm 2.56"	12 mm 0.47"
	1K176	3-prong anchor with rotating receiver.	275 lbs	Aluminum + Stainless Steel	205 g 0.46 lbs	68 mm 2.68"	25 mm 0.98"
	1K177	3-prong anchor with rotating pyramid.		Stainless Steel	225 g 0.50 lbs	76 mm 2.99"	17 mm 0.67"
y.	1K179	Adapter for Knee Disarticulation, delivered with a spacer. To use with M36 Threaded knees or	150 kg 330 lbs	Stainless Steel	125 g 0.28 lbs	45 mm 1.77"	12 mm 0.47"
-	1K202	4-ear Lamination Anchor	125 kg 275 lbs	Titanium	55 g 0.12 lbs	32 mm 1.26"	10 mm 0.39"
-	1K2O3	4-ear Lamination Anchor HD Heavy duty.	150 kg 330 lbs	Stainless Steel	85 g 0.19 lbs	32 mm 1.26"	10 mm 0.39"
Ó	1K204	4-ear Offset Lamination Anchor HD Transtibial adapter with 9mm axial offset of the pyramid.	150 kg 330 lbs	Stainless Steel	113 g 0.25 lbs	32 mm 1.26"	11 mm 0.43"
	ACC-00-20202-00	4 Ear Connector for 34 mm System	226 kg 500 lbs	Titanium	NC	NC	NC



**#HUMANFIRST** 



MATERIALS

ORTHOSIS



### 4-HOLE **ODOPTER**

TABLE OF CONTENTS

SYNSYS KNEES ANKLES FEET

COMPONENTS

LINERS & SOCKETS ORTHOSIS

MATERIALS

#### Socket attachment device

	ltem N°.	Designation	Max Patient Weight	Material	Weight	Total Height	Build Height
	1K90	Junction Cup with European 4-Hole Pattern for Lami- nation or Thermoforming This cup allows to connect components to the distal end of the socket.	125 kg	Aluminum	50 g 0.11 lbs	22 mm 0.87"	6 mm 0.24"
	1K58	Wedge kit for mounting 1K66 and 1K60 with 1K90.					
CE	15108	Adapter for 1K90		Plastics	15 g / 0.03 lbs	17.5 mm / 0.67"	17.5 mm / 0.67"
	1K95	Child Junction Cup for Lamination or Thermofor- ming. It allows to connect components with 4-hole 30 mm pattern to the distal end of the child socket		Aluminum	45 g 0.10 lbs	22 mm 0.87"	5 mm 0.2"


#### **4-Hole adapters.**

		ltem N°.	Designation	Max patient weight	Material	Weight	Total Height	Build Height
E		1K206	Pyramid Adapter for Child Socket	45 kg 99 lbs	Aluminum + Stainless steel	45 g 0.10 lbs	18 mm 0.71"	6 mm 0.24"
		1K172	Stainless Steel Pyramid Receiver for Socket adap- ter features European 4-hole pattern and a pyramid receiver allowing for tilt adjustment of the socket.	125 kg 275 lbs	Stainless steel	100 g 0.22 lbs	16 mm 0.63"	16 mm 0.63"
	$\bigcirc$	1K66	4-hole Receiver Socket adapter features European 4-hole pattern and a pyramid receiver allowing for tilt adjustment of the socket and rotation adjust- ment.	125 kg 275 lbs	Titanium	93 g 0.20 lbs	26 mm 1.02"	26 mm 1.02"
		1K205	4-hole Pyramid Socket adapter features European 4-hole pattern and a pyramid adapter allowing for tilt adjustment of the socket.	125 kg 275 lbs	Stainless steel	80 g 0.18"	22 mm 0.87"	22 mm 0.87"
		1K60	4-hole Pyramid Socket adapter features European 4-hole pattern and a pyramid adapter allowing for tilt adjustment of the socket and rotation adjustment.	125 kg 275 lbs	Titanium	106 g 0.23 lbs	23 mm 0.90"	23 mm 0.90"
		1K2O9	4-hole Pyramid Socket Adapter features European 4-hole pattern and a pyramid adapter allowing for tilt adjustment of the socket.	125 kg 275 lbs	Titanium	46 g 0.10 lbs	22 mm 0.87"	8 mm
		1K14	Ø 30 mm Tubular Link providing connection between a 30 mm Ø tube and a socket with a 4-hole plate.	100 kg 220 lbs	Alumimum	60 g 0.13 lbs	32 mm 1.26"	32 mm 1.26"
		1K14-P6	Ø 34 mm Tubular LInk providing connection between a 34 mm Ø tube and a socket with a 4-hole plate	125 kg 275 lbs	Alumimum	76 g 0.17 lbs	42 mm 1.65"	42 mm 1.65"





# LINERS OND SOCKETS

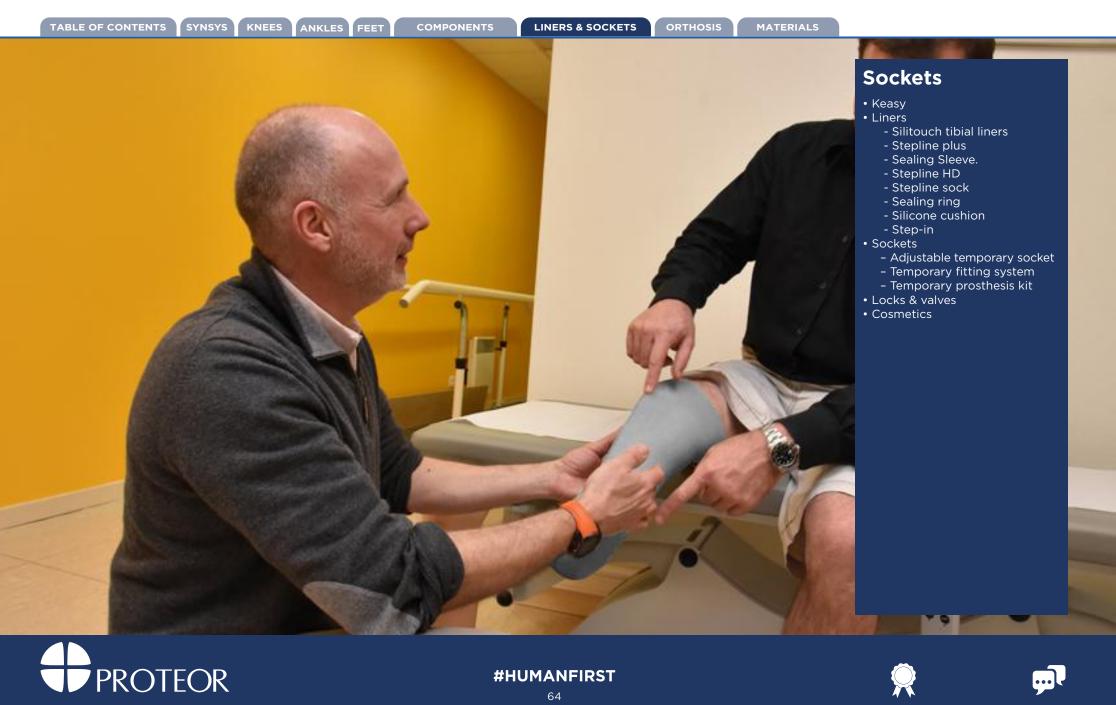



SYNSYS

Keasy

KNEES ANKLES FEET

### KEASY has established itself over the years as the unique prefabricated cone allowing to manufacture rapidly quality finished thermoformed liners.

A unique prefabricated cone, the KEASY has established itself due to the offered ability to rapidly create quality, finished thermoformed liners.

No welding, no gluing, and seamless, the KEASY minimizes allergenic risks while providing comfort. Fabrication and finishing time are shortened with easy thermoforming, cutting and sanding abilities. Changes in limb volume can be accommodated by gluing extra material to the outer surface. Closed cell structure keeps perspiration and cleaning products from penetrating the material for easy cleaning.



Item N°.	Use	Length	Ø Proximal	Profile	Distal Thickness	Packaging
Keasy Comfort	·					
1\$402-110	DK ana all ( Llan an linch	305 mm	110 mm	5 mm	8 mm	x 1
1S402-110#12	BK small / Upper limb	12"	4.33"	0.2"	0.31"	x 12
1\$400-130						x 1
1S400-130#24	BK Long & thin	500 mm 19.68"	130 mm 5.12"	6,5 mm 0.24"	10 mm 0.4"	x 24
1\$400-130#300		10100	0.12	0.2 .		x 300
1\$400-160		400 mm	160 mm	6,5 mm	10 mm	x 1
15400-160#24	BK Short & medium	15.75"	6.3"	0.24"	0.4"	x 24
15400-180	5171	500 mm	180 mm	6,5 mm	15 mm	x 1
15400-180#12	BK long	19.68"	7.09"	0.24"	0.6"	x 12
1\$400-195	51774	510 mm	195 mm	6,5 mm	10 mm	x 1
1S400-195#9	BK XL	20.08"	7.67"	0.24"	0.4"	x 9
15400-210		500 mm	210 mm	6,5 mm	10 mm	x 1
1S400-210#6	AK	19.68"	8.27"	0.24"	0.4"	x 6
1S400-230		510 mm	230 mm	6,5 mm	10 mm	x 1
1S400-230#6	AK XL	20.08"	9.05"	0.24"	0.4"	x 6
Keasy interface						
1S401-170		420 mm	270 mm	3 mm	3 mm	x 1
1S401-170#12	BK Short & medium	16.53"	10.63"mm	0.12"	0.12"	x 12











TABLE OF CONTENTS SYNSYS

ANKLES FEET COMPONENTS

LINERS & SOCKETS

MATERIALS

ORTHOSIS

### SILITOUCH ALOE with distal attachment,

KNEES

is distinguished by a silky and comfortable interior thanks to the combination of silicone and aloe vera.

This specifically enriched solution protects the skin of the residual limb from irritation, by moisturizing it. With distal attachment, this sleeve provides qualitative suspension and support.

A 10cm matrix enhances the lower part of the textile.

- The outer fabric provides support and compression while maintaining flexibility and elasticity
- Daily cleaning by hand or in washing machine at 30°C









### SILITOUCH Tibial liners

TABLE OF CONTENTS SYNSYS

ANKLES FEET COMPONENTS

LINERS & SOCKETS

ORTHOSIS MATERIALS

### SILITOUCH ALOE without distal attachment,

KNEES

is distinguished by a silky and comfortable interior thanks to the combination of silicone and aloe vera. In addition to the softness of the touch, this specifically enriched solution protects the skin from irritation by moisturizing it. It is recommended for residual limbs with bony prominences prone to pressure peaks, and/or conical residual limbs.

- The outer fabric provides support and compression while maintaining flexibility and elasticity
- Can be cleaned daily by hand or in washing machine at 30°C





#### **#HUMANFIRST**

### 🄵 ( E 📋 💭

#### HOW TO DETERMINE THE SIZE





TABLE OF CONTENTS SYNSYS

ANKLES FEET COMPONENTS

LINERS & SOCKETS

ORTHOSIS MATERIALS

### SILITOUCH CLASSIC with distal attachment,

KNEES

combines an inner layer of silicone and an outer textile coating. With distal attachment, this liner provides qualitative suspension and support. A 10cm matrix enhances the lower part of the textile.

- The outer fabric provides support and compression while maintaining flexibility and elasticity
- Can be cleaned daily by hand or in washing machine at 30°C









### SILITOUCH Tibial liners

TABLE OF CONTENTS SYNSYS

ANKLES FEET COMPONENTS

LINERS & SOCKETS

ORTHOSIS MATERIALS

### SILITOUCH CLASSIC without distal attachment,

KNEES

combines an inner layer of silicone and an outer textile coating.

Combining smoothness and comfort, it is the right solution recommended for residual limbs with bony prominences prone to pressure peaks, and/or conical residual limbs.

- The outer fabric provides support and compression while maintaining flexibility and elasticity
- Can be cleaned daily by hand or machine at 30°C











#### TABLE OF CONTENTS

KNEES ANKLES FEET

COMPONENTS LINE

LINERS & SOCKETS ORTHOSIS

S MATERIALS

### The STEPLINE PLUS liners are made of copolymer gel, a flexible material which fits the shape of sensitive residual limbs and provides a comfortable distribution of pressure.

- Recommended for healing residual limbs, residual limbs with multiple trauma and diabetic patients with arterial problems and a very sensitive skin.
- These very fl exible liners can fit any residual limb shape. They can be thermoformed for the most particular shapes.
- Its original design, thicker in the front, protects bony areas while the thiner back helps knee fl exion by limiting strains applied to the patella and folds behind the knee.
- The textile cover does not limit elastic features. The lateral fl at seams do not lead to uncomfort in the distal part of the stump.

made of gel and aluminum alloy can suit any M10 pin.

• Appropriate for patients with low or moderate activity level.


SYNSYS

• Six months warranty





#### **STEPLINE PLUS Locking Liner** Thanks to their tapered shape, STEPLINE PLUS liners are appropriate for trans-tibial amputees. The distal cup

Steerubenus

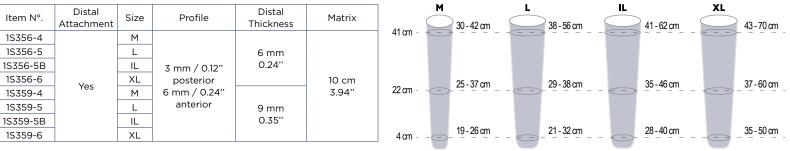

### **STEPLINE PLUS without Distal Attachment**

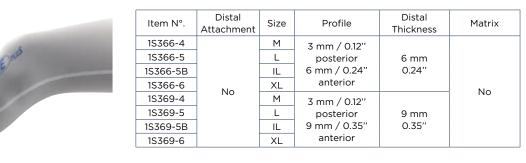

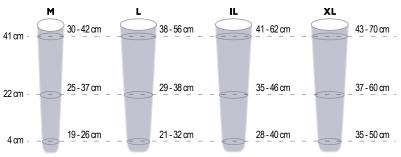





70



TABLE OF CONTENTS





SYNSYS

KNEES

### **STEPLINE PLUS Tapered**

ANKLES FEET

To ensure comfort of conical and sensitive residual limbs, the STEPLINE PLUS Tapered liner has been designed with an increased 6 mm thickness in its distal part.

ORTHOSIS

MATERIALS

m

9 mm

6 mm

6 mm


8 mm

5,5 mm

LINERS & SOCKETS

ltem N°.	Distal Attachment	Size	Profile	Distal Thickness	Color
1S356T-4		М			
1S356T-5	Yes	L	3 mm / 0.12"		
1S356T-5B		IL	posterior	6 mm	Skin color
1S366T-4		М	6 mm / 0.24"	0.24"	Skin color
1S366T-5	No	L	anterior		
1S366T-5B		IL			

COMPONENTS

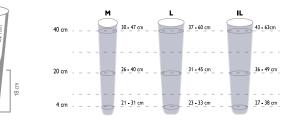




### **STEPLINE PLUS Evolution**

It includes in its front part a flexible textile cover which allows liner stretching and minimizes discomfort during knee flexion. The resistant fabric of its back side reduces lengthening to minimize "pistoning" effect while enhancing stability.

ltem N°.	Distal Attachment	Size	Profile	Distal Thickness	Color
1S356E-4		М			
1S356E-5	Yes	L	2.9 mm / 0.11"		
1S356E-5B		IL	posterior	8 mm	Skin color
1S366E-4		М	6.5 mm / 0.26"	0.31"	Grey
1S366E-5	No	L	anterior		
1S366E-5B		IL			

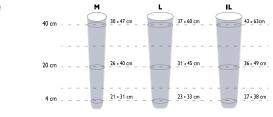

XL

42 - 68cm

40 - 64 cm

38 - 61 cm

34 - 55 cm

27 - 43 cm

XLP

44 - 71cm

41 - 66 cm

39 - 63 cm

35 **-** 56 cm

30 **-** 50 cm

### **STEPLINE PLUS AK**

This model of STEPLINE PLUS is appropriate for any type of trans-femoral residual limb.



ltem N°.	Distal Attachment	Size	Profile	Distal Thickness	Color							
1S356A-4		М										
1S356A-5	]	L	]				M	1	L		IL	
1S356A-6	Yes	١L				3 mm	40 cm	<u>27 - 43 cm</u>		_37 - 59 cm		_40_64cm
1S356A-7		XL				30 mm		25 - 40 cm		22.54		24. 50
1S356A-8		XLP	3 mm	5.2 mm	CHON		30 cm	25 - 40 cm		32 - 51 cm		
1S366A-4		М	0.12"	0.2"	Grey		20 cm			28 - 45 cm		_34 - 54 cm
1S366A-5	]	L	]									
1S366A-6	No	IL					10 cm	> 22 - 35 cm -		_25 - 40 cm		_30_48_cm
1S366A-7		XL					4 cm =	20 - 32 cm -		_21 - 33 cm		_26 - 41 cm
1S366A-8	]	XLP	]			5,2 mm						









STEPLINE PLUS

STEPLINE

STEPLINE



### STEPLINE PLUS Sealing Sleeve.

The STEPLINE PLUS sealing sleeve is made from our copolymer gel and features a durable fabric outer-covering that offers great durability and flexibility. The STEPLINE PLUS is available in two colors.

MATERIALS

ltem N°.	Material	Length	Profile	Distal Circumference	Proximal Circumference	Color									
1S500-M				21 to 30 cm 8.27" to 11.81"	29 to 43 cm 11.12" to 16.93"										
1S500-L				28 to 48 cm 11.02" to 18.90"	36 to 51 cm 14.17" to 20.08"										
1S500-LP				31 to 46 cm 12.20" to 18.11"	39 to 55 cm 15.35" to 21.65"	Beige									
1S500-XL				34 to 50 cm 13.38" to 19.68"	42 to 60 cm 16.53" to 23.62"										
1S500-XXL	Copolymer 350 mm	350 mm	3 mm	36 to 55 cm 14.17" to 21.65"	44 to 70 cm 17.32" to 27.56"										
1S510-M	Gel	13.78"	0.12" regular	21 to 30 cm 8.27" to 11.81"	29 to 43 cm 11.12" to 16.93"										
1S510-L				28 to 48 cm 11.02" to 18.90'	36 to 51 cm 14.17" to 20.08"										
1S510-LP														31 to 46 cm 12.20" to 18.11"	39 to 55 cm 15.35" to 21.65"
1S510-XL				34 to 50 cm 13.38" to 19.68"	42 to 60 cm 16.53" to 23.62"										
1S510-XXL				36 to 55 cm 14.17" to 21.65"	44 to 70 cm 17.32" to 27.56"										

### **STEPLINE PLUS PREFLEX Sealing Sleeve.**

Sealing sleeve with 10° pre-flexion. Designed to minimize discomfort during flexion.

Item N°.	Material	Length	Profile	Distal Circumference	Proximal Circumference	Color
1S520-S	_ Copolymer Gel	340 mm 13.39"	3 mm 0.12" regular	28 to 48 cm 11.02'' to 18.90'	36 to 51 cm 14.17" to 20.08"	Beige
1S520-M				31 to 46 cm 12.20" to 18.11"	39 to 55 cm 15.35" to 21.65"	
1S520-L				34 to 50 cm 13.38" to 19.68"	42 to 60 cm 16.53" to 23.62"	
1S520-XL				36 to 55 cm 14.17" to 21.65"	44 to 70 cm 17.32" to 27.56"	

PROTEOR

0° preflexion







COPOLYMER

TABLE OF CONTENTS

KNEES ANKLES FEET COMPONENTS

LINERS & SOCKETS

ORTHOSIS MATERIALS

### STEPLINE HD liners are made of copolymer gel with an inner coating that ensures Hygiene and Durability.

• An ultrathin velvety biocompatible coating has been applied on the gel area. It helps limiting embedded impurities that may appear on the part of the liner in contact with the skin when the patient is wearing it. Moreover, it can be cleaned more easily. Unpleasant smells are reduced and the patient's everyday comfort is improved.

• The skin color external fabric is wear-resistant.


SYNSYS


- The features of the copolymer gel are identical to those of the STEPLINE PLUS liners: distribution of pressure for patients having a particularly sensitive residual limb (healing, with multiple trauma, diabetic patients with arterial disease, ...)
- Design: thicker in the front to protect bony areas ; thiner in the back to help knee flexion.
- Recommended for trans-tibial patients



### **STEPLINE HD Locking Liner**

The distal cup made of gel and aluminum alloy can suit any M10 pin.

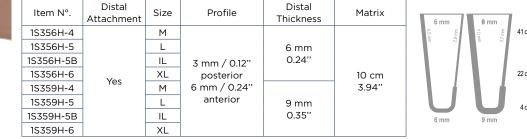

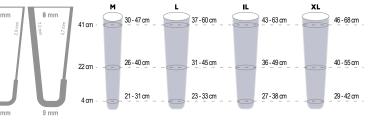



### **STEPLINE HD without Distal Attachment**

ltem N°.	Distal Attachment	Size	Profile	Distal Thickness	Matrix
1S366H-4		М	3 mm / 0.12"		
1S366H-5		L	posterior	6 mm	
1S366H-5B		ΙL	6 mm / 0.24"	0.24"	
1S366H-6	No	XL	anterior		No
1S369H-4		М	3 mm / 0.12"		NO
1S369H-5		L	posterior	9 mm	
1S369H-5B		ΙL	9 mm / 0.35"	0.35"	
1S369H-6		XL	anterior		

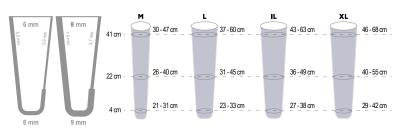










TABLE OF CONTENTS	SYNSYS	KNEES	

FEET COMPONENTS

LINERS & SOCKETS

MATERIALS



### **STEPLINE Sock**

IKLES

Made of 80 % cotton and 20 % nylon textile, STEPLINE socks can be used in direct contact with the skin to drain damp residual limb and limit skin irritations. Used outside a liner, they compensate volume changes. They can be machine washed at 60°C.

ORTHOSIS

ltem N°.	Length	For Liner with Distal Attachment
1X300	20, 25, 30, 35, 40, 45, 50, 55, 60 cm 7.87", 9.84", 11.81", 13.78", 15.75", 17.72", 19.68", 21.65", 23.62"	No
1X301	25, 30, 35, 40, 45, 50 cm 7.87", 9.84", 11.81", 13.78", 15.75", 17.72", 19.68"	Yes

Sealing ring This silicone sealing ring has to be bonded onto the liner of lower or upper limb amputees. By creating vacuum the socket and the liner, it provides the prosthesis suspension through depressurization for patients without locking device. Available in 4 sizes (from 2 to 5) it is suitable for any case.



Item N°.	Size	Ø Distal	Adhesive included
1\$950-02	2	16 to 22 cm / 6.3" to 8.67"	
1\$950-03	3	20 to 38 cm / 7.87" to 14.96"	Vee
1\$950-04	4	30 to 48 cm / 11.81" to 18.90"	Yes
1\$950-05	5	40 to 55 cm / 15.75" to 21.65"	
1S950-12	2	16 to 22 cm / 6.3" to 8.67"	
1S950-13         3           1S950-14         4		20 to 38 cm / 7.87" to 14.96"	No
		30 to 48 cm / 11.81" to 18.90"	
1\$950-15	5	40 to 55 cm / 15.75" to 21.65"	
1\$950-90	Spray donning aid for sealing ring		



CE

### **Silicone cushion** Protects sensitive areas of the residual limb.

ltem N°.	Item N°. Material Diameter	
1S109-80	1S109-80 80 mm ,	
1S109-100	Silicone	100 mm / 3.94"
1S109-120		120 mm / 4.72"

#### Step-In

Step-in is a multi-purpose support designed to easily reflect and assist in donning, drying, and cleaning of liners of any kind (copolymer gel, silicone gel, silicone, etc).

ltem N°.	Height	Packaging
15900	39 cm	Unit
1S900#5	15.35"	Set of 5





## SOCKETS

SYNSYS

TABLE OF CONTENTS

KNEES ANKLES FEET

COMPONENTS

LINERS & SOCKETS

MATERIALS

#### Adjustable temporary socket.

This socket with adjustable closing allows an easy fitting for patients with recent transfemoral amputation.

ORTHOSIS

- A wide range of adult and child sizes.
- A suspension system is necessary (suspenders).
- We strongly recommended to protect the residual limb with cotton tubular jersey.

#### **TECHNICAL FEATURES**

ltem N°.	Side	ltem N°. line	Circumference of residual limb base	Height Perineum / Socket End	Lower Connection	Use
	-G / -D	3438	34 to 38 cm / 13.39" to 14.96"			
	-G / -D	3943	39 to 43 cm / 15.35" to 16.93"			Adult
11/00	-G / -D	4448	44 to 48 cm / 17.32" to 18.90"	26 5 (10.47"	11/100	
1N06	-G / -D	4953	49 to 53 cm / 19.29" to 20.87"	26,5 cm / 10.43"	1N106	
	-G / -D	5458	54 to 58 cm / 20.26" to 22.83"			
	-G / -D	5963	59 to 63 cm / 23.23" to 24.80"			
11/07	-G / -D	3033	30 to 33 cm / 11.81" to 12.99"	21 5 ( 0.40"	11/107	Child
1N07	-G / -D	3438	34 to 38 cm / 13.39" to 14.96"	21,5 cm / 8.46"	1N107	Child

#### ORDER ONE OF THE FOLLOWING TO COMPLETE YOUR ORDER

	ltem N°.	Designation	
-	1N106	Linking Device for Temporary Adult Prosthesis	
	1N107	Linking Device for Temporary Child Prosthesis	
	TJ001/2/3/4/5	Cotton Tubular Jersey	
	1X170	Suspenders for Temporary Prosthesis	







### SOCKETS

ANKLES FEET SYNSYS

COMPONENTS

LINERS & SOCKETS ORTHOSIS

MATERIALS

**Temporary fitting system** This temporary fitting system consists of 3 splints and a multipurpose cup. It can be used rapidly to fit trans-tibial and trans-femoral adults and children with temporary or trial socket. It allows easy alignments. Cost efficient and practical: the cup can be re-used to manufacture the laminated or thermoformed final socket.

#### **TECHNICAL FEATURES**

ltem N°.	Designation	Weight	Use	Possible Lower Connection
			Adult Trans-Femoral Socket	1K172
1N100	Splints and cup	400 g 0.88 lbs	Adult Trans-Tibial Socket	1K205
			Child Trans-Femoral Socket	1K206
1N101	3 stainless steel splints, 2 mm / 0.08" thick, with screws			1N107











### SOCKETS



ANKLES FEET COMPONENTS

LINERS & SOCKETS ORTHOSIS

MATERIALS

**Temporary prosthesis component kit** To facilitate the work of CPOs, we have created the following component kits for the manufacture of temporary prostheses for adults or children.











TABLE OF CONTENTS

KNEES ANKLES FEET

COMPONENTS

LINERS & SOCKETS

MATERIALS

ORTHOSIS

### Valves for thermoformable transfemoral socket

SYNSYS

	Use	ltem N°.	Valve	
	<b>Valve Seat for Thermoformed Socket</b> This valve seat will be placed on the positive model and fixed while socket thermoforming. The assembly is sealed by a joint.	1X21		
	<b>Removable Valve Seat</b> This seat valve will be fitted on thermoformable rigid plastics or soft plastics which will be laminated afterwards. Use 1X4750 tool to set up.	1X47	1X16: Ø 30 mm / 1.18'' Silicone Valve	
9	Valve Seat and Removable Seat This seat valve will be fitted on thermoformable rigid plastics or soft plastics which will be laminated afterwards. Use 1X10150 tool to set up. 1X10158 wrench allows to screw the valve to the seat valve. 1X10159 wrench allows to fit the seat valve on the socket.	1X10140	Included	

### Accessories for femoral valve

	Use	ltem N°.	Valve	
0	<b>Plastic Valve Seat for Gluing</b> This valve seat will be glued on an endoskeletal trans-femoral wooden or aluminium socket.	1X18	9	
	Valve Seat to Glue, without Tube This valve seat will be glued on an endoskeletal trans-femoral laminated or wooden socket.	1X15	1X16: Ø 30 mm / 1.18'' Silicone Valve	
0	<b>Rigid Hole Shuttle Housing</b> To be glued on a wooden or laminated traditional socket.	1X45		










KNEES

ANKLES FEET

COMPONENTS

TABLE OF CONTENTS

SYNSYS

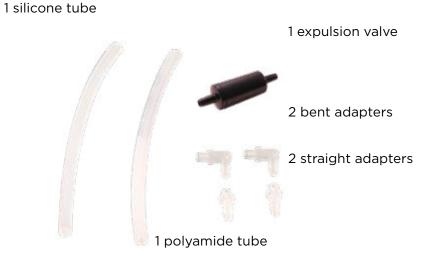

LINERS & SOCKETS

ORTHOSIS

**One-way valve for transtibial prosthesis** The one way valve is designed only for lower limb prothesis. It reduces pulling effects sometimes observed with distal attachment systems and allows for easy cleaning.

MATERIALS

#### **TECHNICAL FEATURES**

ltem N°.	Use	Operation
1\$160	Transtibial	Automatic







TABLE OF CONTENTS

KNEES ANKLES FEET

COMPONENTS

LINERS & SOCKETS

MATERIALS

ORTHOSIS

### **Depressurizing Valves**

SYNSYS

	Use	Description	ltem N°.
90	<b>Depressurizing Valves for Transtibial Socket</b> Allows a firm suspension of the prosthesis onto the residual limb, due to automatic air expulsion. Easy to use for the patients.	Valve for BK Socket	15162
120	<b>Depressurizing Valves for Transfemoral Socket</b> Allows a firm suspension of the prosthesis onto the residual limb, thanks to manual air expulsion or automatic one. The cap has a quick opening system (1/4 turn), allowing to use a putting on aid for the prosthesis. Easy to use for the patient. A specific tool (1S164) can be used to set up the valve.	Valve for AK Socket	15163
	<b>Specific Tool</b> Allows to set up, remove and configurate (manually or automatically) transfemoral valve 1S163.	Tool for 1S163 depres- surizing Valve	15164







TABLE OF CONTENTS

SYNSYS KNEES ANKLES FEET

COMPONENTS

LINERS & SOCKETS

ORTHOSIS MATERIALS

#### Locks for distal attachment

	Use	Material	Weight	Tools & Accessories	ltem N°.
	Locking Kit with Cord The attachment device of the cord kit is screwed to the end of the liner. The cord goes through the bottom of the socket and is held by a fixing system outside the socket. Cord traction makes the residual limb stretch, so it can be introduced into the socket more easily. This kit is mainly appropriate for trans- femoral patients, but can be offered to transtibial patients whose residual limb is too fleshy in its distal part. As action is generated by a manual traction on the cord instead of pressure on the residual limb, this kit is recommended for patients who are not satisfied by a locking kit with pin.	Plastics	50 g 0.11 lbs	Included	15101
	<ul> <li>Locking Kit with Notched Pin</li> <li>This locking system is mainly appropriate for transtibial patients.</li> <li>A sound effect when putting on the prosthesis indicates the prosthesis is correctly set up and reassures the patient.</li> <li>To take off the prosthesis, the patient simply presses a push button that will release the liner.</li> </ul>	Plastics + Aluminum	85 g 0.19 lbs	1S112: Centring Tool 1S105: European 4-Hole Adapter	15103
, The second sec	Locking Kit with Smooth Pin and Large Cup This kit with push button and smooth pin is fitted with a device that locks the pin, allowing accurate po- sitioning. Its large cup (Ø 75 mm / 2.95") is particularly appropriate for residual limbs with large volume, such as transfemoral ones. Pin length: 30 mm / 1.18"	Plastics	95 g 0.21 lbs	1S118-1: Tools for lamination / thermoforming 1S112: Centring Tool	1S116-1
	<ul> <li>Locking Kit with Smooth Pin and Small Cup</li> <li>This kit with push button and smooth pin is fitted with a device that locks the pin, allowing accurate positioning.</li> <li>Its small cup (Ø 57 mm / 2.27") is particularly appropriate for residual limbs with low volume, such as transtibial ones. Pin length: 30 mm / 1.18"</li> <li>1S11710: cup only</li> </ul>	Plastics	90 g 0.20 lbs	1S119-1: Tools for Lamination / Thermoforming 1S112: Centring Tool	15117-1
80	Locking Kit with Smooth Pin and Large Cup for 1K90 This kit with push button and smooth pin is fitted with a device that locks the pin, allowing accurate positioning. Thanks to its large cup (Ø 75 mm / 2.95"), it is particularly appropriate for residual limbs with large volume, such as transfemoral ones. It is designed for assembly with 1K90 cup which is not included in the kit. Pin length: 30 mm/ 1.18"	Plastics	105 g 0.23 lbs	1S128: Tools for Lamination / Thermoforming 1S112: Centring Tool	1S136-1







TABLE OF CONTENTS

KNEES ANKLES FEET

COMPONENTS

LINERS & SOCKETS

ORTHOSIS MATERIALS

### Locks for distal attachment

SYNSYS

	Use	Material	Weight	Tools & A	ccessories	ltem N°.
	<ul> <li>Locking Kit with Smooth Pin, Small Cup and Adapter for 1K90</li> <li>This kit with push button and smooth pin is fitted with a device that locks the pin, allowing accurate positioning.</li> <li>Its small cup (Ø 57 mm / 2.27") is particularly appropriate for residual limbs with low volume, such as transtibial ones. It is designed for assembly with 1K90 cup which is not included in the kit.</li> </ul>	Plastics	100 g 0.22 lbs	1S129: Tools for Lamination / Thermoforming 1S112: Centring Tool		15137-1
	Locking Kit with Smooth Pin and Vertical Pulling This locking kit with pin is operated by vertical tab pulling. Control of unlocking can be displaced through a handle fitted on the side of the socket. 2 pins are supplied: a smooth pin that provides fine adjustment of the liner, and a smooth pin with notched end allowing the patient to know if the pin is well engaged and providing accurate adjust- ment. Ø 45 mm / 1.77" cup.	Plastics + Aluminum	85 g 0.19 lbs	1S141: Tools for Lamination / Thermoforming 1S129: Tool for Lamination / Thermoforming, used with 1S142 1S112: Centring Tool 1S142: Adapting Kit for assembly with 1K90 cup 1X110:Handle for displaced control of unlocking		15140
	<b>Locking Kit with Notched Pin and Rack Adjustment</b> 1S145 locking kit provides very fine adjustment thanks to its rack system which avoids any slack in the bottom of the socket. It comes with a lamination prong for the upper connec- tion and the tools needed for lamination. The lower connection is provided by screwing a threaded pyramid insert (1K182) or a threaded Receiver insert (1K183).	Aluminum + Stainless steel	125 g 0.28 lbs	1K182: Threaded Pyramid insert 1K183: Threaded Receiver insert		1S145
	Smooth Pin				30 mm 1.18"	1S11632
1 Star		-		- Pin length	36 mm 1.42"	1S11636-1
•					50 mm 1.97"	1S11633







TABLE OF CONTENTS SYNSYS KNEES ANKLES FEET

COMPONENTS

LINERS & SOCKETS

ORTHOSIS MATERIALS

#### Tools and accessories for lock

	Use	Material	Weight	Item N°.
	<b>European 4-Hole plate</b> This cup allows to fit any European 4-hole linking component (4 x M6, 36 mm / 1.42'') on a knee. Comes with its protective tools.	Aluminum	75 g 0.16 lbs	15105
	<b>Centring Tool</b> Fitted on the end of a positive model previously slightly levelled, the 1S112 tool allows to install a pin lock. It will be taken off (for re-use) when the positive model is broken down. Used for item No 1S103, 1S116-1, 1S117-1, 1S136-1, 1S137-1, 1S140	Plastics	-	15112
8	<b>Forming Tool for 1S116-1</b> 1S118-1 tool allows to keep enough space at the bottom of the socket to receive 1S116-1 locking kit with smooth pin.	Plastics	-	1S118-1
8	<b>Forming Tool for 1S117-1</b> 1S119-1 tool allows to keep enough space at the bottom of the socket to receive 1S117-1 locking kit with smooth pin.	Plastics	-	15119-1
	Forming Tool for 1S136-1 1S128 tool allows to keep enough space at the bottom of the socket to receive 1S136-1 locking kit with smooth pin and adapter.	Plastics	-	15129
Test	<b>Tools for 1S140</b> This tooling kit allows to keep enough space at the bottom of the socket to receive 1S140 locking kit. It comes with a short and a long pipe used according to the type of endoskeletal or exoskeletal socket. A drilling and screwing set is also supplied for easier assembling of the different items.	Special treated steel		15141







TABLE OF CONTENTS

KNEES ANKLES FEET

COMPONENTS

LINERS & SOCKETS ORTHOSIS

MATERIALS

### **Tools and accessories for lock**

SYNSYS

[		Use	Material	Weight	ltem N°.
CE	<b>E</b>	Adapting Kit for Assembly on a Cup 1S142 adapting kit allows to fit 1S140 locking kit with pin on 1K90 cup (not included in the kit). This kit includes a Ø 57 mm / 2.24" cup and the screws needed to assemble the items. The use of 1S129 tool is necessary.	Plastics	15 g 0.03 lbs	15142
CE		<b>Handle for Displaced Control of Unlocking</b> 1X110 handle allows to displace control of unlocking to a place that is more accessible for the patient. It is appropriate for 1M102V and 1M102V-P6 locking knees.	Plastics	25 g 0.05 lbs	1X110
CE		<b>Threaded Pyramid Insert</b> This pyramid is screwed to the lower end of 1S145 lock.	Stainless steel	65 g 0.14 lbs	1K182
ce		<b>Threaded Receiver Insert for 1S145 Lock</b> This receiver is screwed to the lower end of 1S145 lock. Threaded Receiver Insert for 1S145 Lock	Stainless steel	75 g 0.16 lbs	1X183









## COSMETICS

SYNSYS

KNEES

TABLE OF CONTENTS



ANKLES FEET COMPONENTS LINERS

LINERS & SOCKETS

MATERIALS

ORTHOSIS

### Transfemoral 2-part cosmetic cover

- Does not interfere with knee unit or its settings.
- Lets clothing slip on the cosmetic cover without snagging it.

#### **TECHNICAL FEATURES**

Shin Item N°.	Knee Cap Item No	Knee
1G21		1M01 / 1M10 / 1M01-P6 / 1M10-P6
1G21	1M10294	1M102 / 1M102V / 1M102-P6 / 1M102V-P6

#### JUNCTION PLATES

ltem N°.	Foot		
1D20	S.A.C.H.		
1D26	Child		













### COSMETICS

TABLE OF CONTENTS

KNEES ANKLES FEET

COMPONENTS LINERS & SOCKETS

ORTHOSIS MATERIALS

### PE & PU one-part cosmetic cover

SYNSYS

	Prosthesis	Length	Color	Material	Diameter	Iten	n N°.	Packaging
	ВК	545 mm 21.46"		Polyurethane	max 200 mm / 7.87''	16	514	x 1
	ВК	480 mm 18.90"		Polyethylene	Shin 147 mm / 5.79" Ankle 100 mm / 3.94"	10	517	x 1
						1G1	7#12	x 12
					320 mm / 12.6"	Left	1G13-G32	
	1M01 1M01-P6 1M10 1M10-P6 1M102 1M102-P6 1M102V 1M102V-P6 1M03 1M05 1M05 1M112 1M113	1M01-P6 1M10 1M10-P6 1M102 1M102-P6 1M102V 1M102V-P6 1M03 1M05 1M112 1M113 1M113 1M115		Polyurethane	320 mm / 12.0	Right	1G13-D32	
			Caucasian		360 mm / 14.17"	Left	1G13-G36	
1						Right	1G13-D36	x 1
					400 mm / 15.75"	Left	1G13-G40	-
						Right	1G13-D40	
	1M115 1M149				440 mm / 17.32"	Left	1G13-G44	
					440 11111 / 17.32	Right	1G13-D44	
	1P120	900 mm 1P120 35.43" 1P360 1P131		(17.70)	Left	1G16-G44		
				Polyurethane	440 mm / 17.32"	Right	1G16-D44	x 1
					360 mm / 14.17"	Left	1G18-G36	
					300 1111 / 14.17	Right	1G18-D36	
1	1P200			Dobuwothara	400 mm / 15.75"	Left	1G18-G40	
	1200			Polyurethane	400 mm / 15.75	Right	1G18-D40	x 1
					440 mm / 17.32"	Left	1G18-G44	-
						Right	1G18-D44	







### COSMETICS



ORTHOSIS MATERIALS

#### Plastazote one-part cosmetic cover

Both cosmetic covers are thermoformable at 100°.

Prosthesis	Length	Color	Material	Diameter	ltem N°.	Packaging
ВК	590 mm 23.23"	Caucasian	Plastazote	Proximal 170 mm / 6.69'' Distal 100 mm / 3.94''	1G1510	x 1
AK	245 mm 9.65"	Medium	Polyure- thane	max 235 mm / 9.25"	1G1525	x 1
АК	510 mm 20.08"	Caucasian	Plastazote	Proximal 190 mm / 7.48'' Distal 125 mm / 4.92''	1G24	x 1







### ORTHOSIS

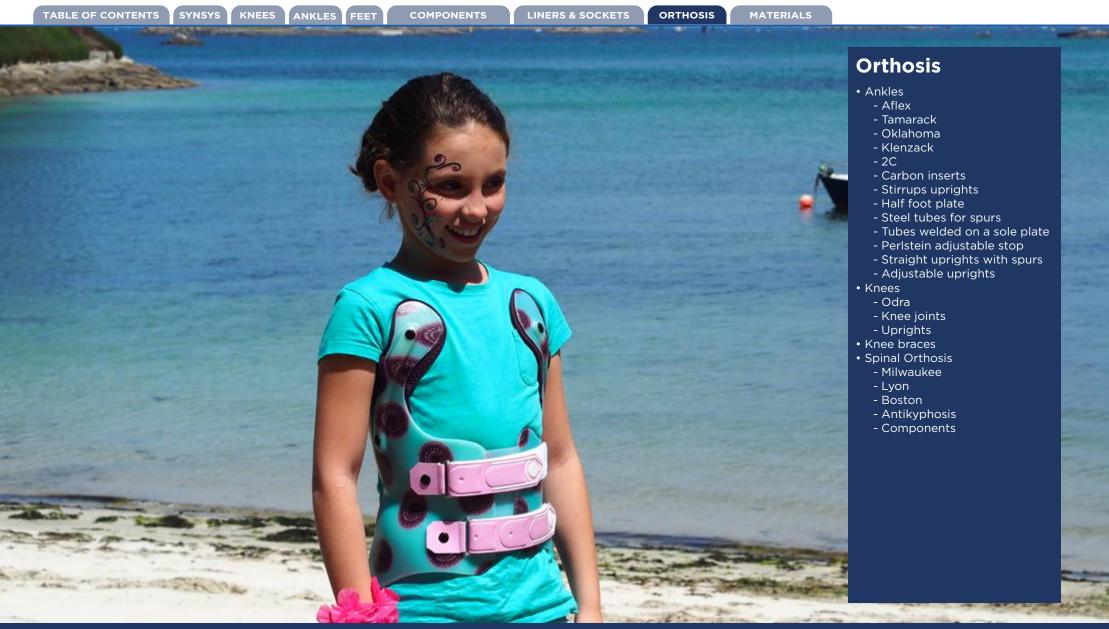




TABLE OF CONTENTS

SYNSYS KNEES ANKLES FEET

COMPONENTS LINERS & SOCKETS

ORTHOSIS MATERIALS



### A complete line of flexure joints, let Aflex help you to fabricate all your thermoformed orthoses.

- Indications: to treat pathologies of neurologic, muscular or traumatic origin that affect foot levator muscles.
- Easy implementation thanks to their flexibility allowing self-alignment.
- Designed to last, Aflex have been tested in all conditions and guaranteed meet your needs.

### Flexible AFLEX

Recommended for night AFO, their flexibility ensures comfort for even very spastic patients and possible motions of the ankle allow a better compliance of the orthosis.

(3 sizes available (pediatric, child, adult)



Designation	Pediatric	Child	Adult			
L×W	34 x 11,6 mm	42 x 11,7 mm	49 x 14 mm			
LXVV	1.34 x 0.46"	1.65 x 0.46"	1.93 x 0.55"			
Packaging		Pair				
Thickness *	Thickness * 5 mm / 0.2" 6,5		8 mm / 0.31"			
ltem N°. kit	2C131-P	2C131	2C130			



Recommended for walking AFO, they prevent plantiflexion of the foot and motion in rotation and inversioneversion of the foot. Reinforced with a Kevlar fiber braid: Superior Tensile Strength

Child

40 x 14 mm

1.57 x 0.55"

2C161

2 sizes available (child, adult).

Designation

L x W

Packaging


Thickness \*

Item N°. kit

### **Reinforced Dorsi AFLEX**

Recommended for walking AFO with Dorsi Flexion assist. The natural yield of the joint provides a motion assistance in Dorsi Flexion during swing phase to supply toe clearance. Reinforced with a Kevlar fiber braid: Superior Tensile Strength. 3 durometers available to give a better answer for patient needs (70, 80 and 90 ShA).

2 sizes available (child, adult).

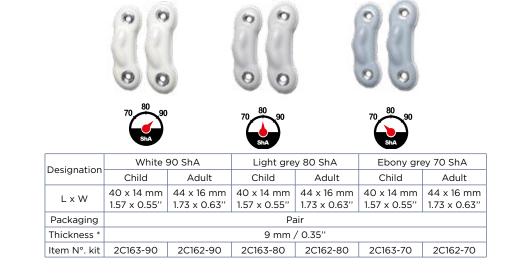

#### \* Thickness at the center



**#HUMANFIRST** 

Adult

44 x 16 mm

1.73 x 0.63'

2C160

Pair

9 mm / 0.35"



SYNSYS

TABLE OF CONTENTS

KNEES ANKLES FEET

COMPONENTS

LINERS & SOCKETS

MATERIALS

ORTHOSIS

### Tamarack Joint (pair)

	Use	Patient size	Length	Molding dummy (to be ordered separately)	ltem N°.
- F - C - F	<ul> <li>Limits equinus foot motions.</li> <li>Put up light resistance to dorsiflexion motions.</li> <li>Good rigidity in heel varus/valgus.</li> </ul>	S	32 mm 1.26"	2С094-Р	2С093-Р
	- Recommended for thermoformed boots. - The molding dummy must be ordered separately.	М	38 mm 1.5"	2C094-M	2C093-M
		L	45 mm 1.77"	2C094-L	2C093-L

### Oklahoma Joint (pair) 📭

	Use	Patient size	Length x Width	Item N°.		
	<ul> <li>Injection moulded plastic joint that can be heat formed and fixed to the cast before the orthosis thermoforming.</li> <li>Each pair of joints comes with the necessary tools, 2 adhesive cushions, 2 hard-foam cushions.</li> </ul>	XS	51 x 24 mm 2 x 0.94"	2C098-P		
				S	67 x 25 mm 2.64 x 0.98"	2C098-S
		М	83 x 32 mm 3.27 x 1.26''	2C098-M		
		L	95 x 38 mm 3.74 x 1.5"	2C098-L		
		XL	101 x 45 mm 3.98 x 1.77''	2C098-XL		

### Klenzack (pair)

Use	Upright length	Stirrup length	Upright section	Stirrup	Diameter	ltem N°.
<ul> <li>For foot lift with adjustable pressure spring.</li> <li>Aluminum anti-equinus joint with dorsiflexion assist.</li> </ul>	430 mm 16.93''	140 mm 5.51"	13.5 x 5.5 mm 0.53 x 0.22"	22.2 x 3.3 mm 0.87 x 0.13''	36 mm 1.42"	2C012







SYNSYS

TABLE OF CONTENTS

KNEES ANKLES FEET

COMPONENTS

LINERS & SOCKETS

ORTHOSIS MATERIALS

### Free motion ankle joint

	Use	Including	Upright section	Recommended upright	Compatible stirrup	ltem N°.
<ul> <li>Made of light alloy.</li> <li>Can be used with carbon or Aluminum uprights, to be screwed and glued with the XC062 adhesive.</li> <li>Resistant design.</li> <li>The 2C132 and 2C133 pairs of joints come with a spacer allowing to use either 16 x 4 mm / 0.63 x 0.16"or 18 x 5 mm / 0.71 x 0.2"uprights.</li> <li>Straight lateral joint: A Curved medial joint: B</li> </ul>	A x 2	16 x 4 mm 0.63 x 0.16"	2M135		2C132	
	A + B	or 18 x 5 mm 0.71 x 0.2"	2M145	2051	2C133	
	A x 2	22 x 6 mm	0M155	2C51	2C146	
	A + B	0.87 x 0.24"	2M155		2C147	

### Single action with adjustable pressure spring

	Use	Leg	Including	Upright Section	Recommended upright	Compatible stirrup	ltem N°.
	B or C - Made of light alloy. - Adjustable assist strength. - The 2C134, 2C135 and 2C136 pairs of joints come with a spacer allowing to use either 16	L and R	A + A	16 x 4 mm 0.63 x 0.16" or 2M135 2M135 2M145			2C134
B or C		L	A + B			2C135	
6 6		R	A + C	18 x 5 mm 0.71 x 0.2"		2C52	2C136
3 . E		L and R	A + A			2052	2C148
		L	A + B	22 x 6 mm 0.87 x 0.24"	2M155		2C149
		R	A + C				2C150

### Double action with adjustable pressure spring

	Use	Including	Upright Section	Recommended upright	Compatible stirrup	ltem N°.
		A x 2	16 x 4 mm 0.63 x 0.16"	2M135		2C137
B Double action ankle joint: - Made of light alloy. - Adjustable dorsiflexion and plantarflexion assist strengths each joint.	A + B	or 18 x 5 mm 0.71 x 0.2"	2M145	2C53	2C138	
	A Curved medial joint: B	A x 2	22 x 6 mm	2M155	2000	2C151
		A + B	0.87 x 0.24"	CCIMIZ		2C152







TABLE OF CONTENTS SYNSYS

KNEES ANKLES FEET

COMPONENTS

LINERS & SOCKETS

MATERIALS

ORTHOSIS

### Stainless steel stirrups uprights (pair)

Product	Length	Upright Section	Hole diameter	Weight	Compatible joint	ltem N°.
Free joint stirrup upright					2C132 2C133 2C146 2C147	2C51
Single action joint stirrup upright	150 mm 5.90"	22 x 3 mm 0.87 x 0.12"	8 mm 0.32"	125 g 0.28 lbs	2C134 2C135 2C136 2C148 2C149 2C150	2C52
Double action joint stirrup upright				-	2C137 2C138 2C151 2C152	2C53







SYNSYS

TABLE OF CONTENTS

KNEES ANKLES FEET

COMPONENTS LINERS & SOCKETS

MATERIALS

ORTHOSIS

#### Half foot plate to be welded on any pipe for spurs.

	Width	Length	Thickness	Item N°.
	25 mm / 0.98"	90 mm / 3.54"	2 ( 0 00"	2B001090
the second second second second second second second	35 mm / 1.38"	110 mm / 4.33"	2 mm / 0.08"	2B001110

#### **Steel tubes for spurs**

	Length	Ext. Ø	Int. Ø	ltem N°.
	9 mm / 0.35"	6 mm / 0.24"	2B0504	
	100 mm / 3.94"	11 mm / 0.43"	8 mm / 0.31"	2B0604

### Steel tubes for spurs welded on a sole plate

Leg	Length	Int. Ø	Item N°.
Right	20 mm / 715"		2B006-D080
Left	80 mm / 3.15"	6 mm / 0.24"	2B006-G080
Right		6 1111 / 0.24	2B006-D090
Left	90 mm / 3.54"		2B006-G090
Right	30 mm / 3.34		2B008-D090
Left		- 8 mm / 0.31"	2B008-G090
Right	110 mm ( 4 77"	0 11117 0.31	2B008-D110
Left	— 110 mm / 4.33"		2B008-G110

### Steel Perlstein eccentric adjustable stop

	Product	Int. Ø	Item N°.
Set including:		6 mm / 0.24"	2B1110
	small plate welded on pipe + toothed nut + screw	8 mm / 0.31"	2B1210
· · · · ·	Perlstein stop including: small plate + toothed nut + screw	6 mm / 0.24"	2B1106
		8 mm / 0.31"	2B1206







SYNSYS

TABLE OF CONTENTS

KNEES ANKLES FEET C

COMPONENTS LINERS & SOCKETS

MATERIALS

ORTHOSIS

### Stainless steel straight uprights with spurs

- Allow the adjunction of anti-stepping device.
- Allow the adjunction of a Perlstein stop.
- Delivered without tube.

	Product	Length	Upright Section	Hole Ø	Pipe Length	ltem N°.							
	Upright with spindle		12 x 3 mm 0.47 x 0.12"						390 mm 12 x 3 mm	12 x 3 mm	6 mm	95 mm 3.74"	2B0301
/ /	Single upright + screw								0.24"	100 mm 3.94"	2B0311		
	Upright with spindle 450 mm	16 x 3 mm	16 x 3 mm	16 x 3 mm	16 x 3 mm	16 x 3 mm	16 x 3 mm	16 x 3 mm	16 x 3 mm	8 mm	105 mm 4.13''	2B0401	
$\sim$	Single upright + screw	17.72"	0.63 x 0.12"		110 mm 4.33"	2B0411							

### Stainless steel short straight or curved adjustable uprights with spurs

- Allow the adjunction of anti-stepping devices.
- Allow the adjunction of a Perlstein stop.
- Drilled uprights with 9 M4 tapped holes (10 mm / 0.39  $^{\prime\prime}$  spaced out).
- The adjustment holes allow to make a removable set, or to follow the patient's growth.
- Delivered without tube.

	Upright type	Length	Upright Section	Hole Ø	ltem N°.
1.1.1	Straight	90 mm	12 x 3 mm	6 mm	2B0701
and a set	Curved	3.54"	0.47 x 0.12"	0.24"	2B0901
	Straight 120 mm	16 x 3 mm	16 x 3 mm 8 mm	2B0801	
No.	Curved	4.72"	0.63 x 0.12"	0.32"	2B1001







### ODRO

SYNSYS

#### Custom-made knee orthosis for osteoarthritis

Orthosis Distraction Rotation Arthrosis, Odra is an articulated off-load orthosis, made after a casting or a digital acquisition, and designed for the symptomatic treatment of medial tibiofemoral knee osteoarthritis.

ORTHOSIS

• Unique patented mode of action: The double effect of distraction and rotation induces a discharge of the medial knee compartment.

- Proven efficacy: ERGONOMIE study
- Morphologic: Custom-made by a CPO after a casting or a digital acquisition.
- Dynamic orthosis: Operates at full knee extension only.

• Compliance: The ERGONOMIE study shows that the wearing time (>5h/day, 6 days out of 7 on average) is close to the instructions given to the patients when entering the trial (6h/day).

#### **TECHNICAL FEATURES**

Product Nr	Description	Contents
2H200-D / 2H200-G	Complete kit for the manufacture of an orthosis - thermoformable plastic not included (right knee / left knee)	Medial and lateral joints with tracing template and protective covers, lower band, lining and straps
2H240-D / 2H240-G	Set of joints (right knee / left knee)	Medial and lateral joints with tracing template and protective covers
2H260	Lining kit	Silicone fabric, imitation leather cover, straps and cushions, Quicky clips, rivets,





Indications:

Treatment of medial compartment pain over than 40 mm on the VAS scale, regardless of the radiographic stage (1 to 4).

Contra-indicati

uperficial venous problems, stronger troubles in the lateral compartment than in the treated nedial compartment, strong recurvatum.









# Knee Joints

SYNSYS

TABLE OF CONTENTS

KNEES ANKLES FEET

COMPONENTS LIN

LINERS & SOCKETS

MATERIALS

ORTHOSIS

Pair of free knee joints

	Use	Upright section	Axis Ø	Weight	ltem N°.
(1) . (1)	Stainless steel free joints.	16 x 4 mm 0.63 x 0.16"	29 mm	210 g	2K143
	<ul> <li>Statilies steel free joints.</li> <li>To be used with carbon, steel or Aluminum uprights, to fix with XC062 adhesive.</li> <li>Great adaptability to the patient's leg shape: Lateral screws on both sides of the upright allow to refine the orthosis</li> </ul>	18 x 5 mm 0.71 x 0.2"	1.14"	232 g	2K144
5-1 - 1-11	alignment (+/- 5°). • Easy casing disassembly / reassembly in case of replacement.	22 x 6 mm 0.87 x 0.24"	32 mm 1.26"	281 g	2K145
	• Each pair of joints accomodates right or left knee.	20 x 5 mm 0.79 x 0.2"	29 mm 1.14"	266 g	2K147

#### Offset free knee joints

	Use	Upright section	Leg	Axis Ø	Weight	ltem N°.
		16 x 4 mm	R	23 mm	140 a	2K111
	• Stainless steel free joints.	0.63 x 0.16"	L	0.90"	140 g	2K112
	<ul> <li>To be used with carbon, steel or Aluminum uprights, to fix with XC062 adhesive.</li> <li>Great adaptability to the patient's leg shape: Lateral screws on both sides of the upright allow to refine the orthosis</li> </ul>	18 x 5 mm	R	26 mm	190g	2K113
	alignment (+/- 5°). • Easy casing disassembly / reassembly in case of replacement.	0.71 x 0.2"	L	1.02"	1509	2K114
-0	Each pair of joints accomodates right or left knee.	22 x 6 mm	R	28 mm	280 g	2K115
		0.87 x 0.24"	L	1.10"	200 g	2K116





# Knee Joints

TABLE OF CONTENTS

SYNSYS KNEES ANKLES FEET

COMPONENTS

LINERS & SOCKETS

MATERIALS

ORTHOSIS

Pair of lock knee joints	Use	Upright section	Axis Ø	Weight	ltem N°.
	• Those joints are fitted with trigger locks that can be used with a hoop and then become « Hoffa locks » for one-	16 x 4 mm 0.71 x 0.16"	29 mm 1.14"	243 g 0.54 lbs	2K140
.0 .0	hand handling. In that case, fastening an assist strap is necessary.	18 x 5 mm 0.71 x 0.2"	29 mm 1.14"	266 g 0.59 lbs	2K141
	<ul> <li>Hoop fastening in the triggers is made by screwing and gluing.</li> <li>The system ensures easy hoop assembly and disassembly, without welding.</li> <li>The stop screw allows to adjust the lock play.</li> </ul>	22 x 6 mm 0.87 x 0.24"	32 mm 1.26"	316 g 0.7 lbs	2K142
	•To be used with carbon, steel or Aluminum uprights, to fix with XC062 adhesive.	20 x 5 mm 0.79 x 0.2"	29 mm 1.14"	297 g 0.65 lbs	2K146

Pair of drop lock knee joints	Use	Leg	Patient's size	Upright section	Joint Ø	Weight	ltem N°.
		R	C	16 x 4 mm	23 mm	140 g	2K81
		L	S	0.71 x 0.16"	0.90"	0.31 lbs	2K82
	. To be used with steel or Aluminum unvisite to fiv by vivating	R	M	18 x 5 mm	27 mm	210 g	2K83
	• To be used with steel or Aluminum uprights, to fix by riveting.	L	IMI	0.71 x 0.2"	1.06"	0.47 lbs	2K84
		R		20 x 5 mm	29 mm	250 g	2K85
~		L	L	0.79 x 0.2"	1.14"	0.33 lbs	2K86







### UPRIGHTS

TABLE OF CONTENTS	SYNSYS	KNEES	ANKLES	FEET	COMPONENTS	LINERS & SOCKETS	ORTHOSIS	MATERIALS	

Set of Uprights	Use	Length of leg upright	Length of thigh upright	Upright section (Wide   Narrow)	Material	ltem N°.
	Set of uprights for screwing and gluing Each set of uprights includes 2 leg uprights plus 2 thigh	480 mm	390 mm	16 x 4 mm 0.63 x 0.16"		2M135
And and a second s	uprights.	18.90"	15.35"	18 x 5 mm 0.71 x 0.2"		2M145
		560 mm	430 mm	22 x 6 mm 0.87 x 0.24"	- Aluminum -	2M155
		22.04"	16.93"	20 x 5 mm 0.79 x 0.2"		2M07
		480 mm	390 mm	16 x 4 mm 0.63 x 0.16"	- Stainless steel -	2M136
		18.90"	15.35"	18 x 5 mm 0.71 x 0.2"	Stamless steel	2M146
	Set of uprights for riveting Each set of uprights includes 2 leg uprights plus 2 thigh	480 mm	390 mm	16 x 4 mm 0.63 x 0.16"		2M01
	uprights.	18.90"	15.35"	18 x 5 mm 0.71 x 0.2"	Aluminum	2M03
		560 mm 22.04"	430 mm 16.93"	20 x 5 mm 0.79 x 0.2"		2M05

#### Thigh and calf bands

 Use		Length 250	mm / 9.84"	Length 500	mm / 19.68"
Prefabricated aluminum bands	Width	2 mm / 0.08"	2,5 mm / 0.1"	2 mm / 0.08"	2,5 mm / 0.1"
<ul><li>Time saving.</li><li>Optimal finishing quality.</li></ul>	20 mm / 0.79"	2P150-S20	2P151-S20	2P150-L20	2P151-L20
	25 mm / 0.98"	2P150-S25	2P151-S25	2P150-L25	2P151-L25
	30 mm / 1.18"	2P150-S30	2P151-S30	2P150-L30	2P151-L30
	40 mm / 1.57"	2P150-S40	2P151-S40	2P150-L40	2P151-L40







# KNEE BRACES

TABLE OF CONTENTS SYNSYS

KNEES ANKLES

FEET COMPONENTS

LINERS & SOCKETS

MATERIALS

#### Aluminum free knee braces for child (pair)



Use	Length of leg upright	Length of thigh upright	Upright section	Joint Ø	Weight	ltem N°.
The knee joints lenghten and then form one-piece leg and thigh uprights.	350 mm 13.78"	300 mm 11.81"	13 x 5 mm 0.51 x 0.2"	19 mm / 0.75"	285 g 0.63 lbs	2H03

ORTHOSIS

#### Drop lock knee braces for adult



#### Drop lock braces with adjustable flexion



#### Plastic knee splints (pair)



Use	Upright section	Joint Ø	Weight	ltem N°.
Polycentric double joints	25 x 5 mm 0.98 x 0.2"	8 mm / 0.31"	225 g / 0.5 lbs	6C99





Length of leg

Length of

Upright

Use	Leg side	Length of leg upright	Length of thigh upright	Upright section	Joint Ø	Weight	ltem N°.
• Flexion adjustment amplitude: up to 30°.	R	370 mm	350 mm	18 x 5 mm	26 mm	540 g	2T31
• The locking is independent from the degree of flexion.	L	14.57"	13.78'	0.71 x 0.2"	1.02"	1.19 lbs	2T32
	R	470 mm	420 mm	22 x 6 mm	28 mm	870 g	2T35
	L	18.50"	16.53"	0.87 x 0.24"	1.10"	1.92 lbs	2T36





SYNSYS

TABLE OF CONTENTS

ANKLES FEET

COMPONENTS

LINERS & SOCKETS

MATERIALS ORTHOSIS



Kit for Milwaukee	spinal orthose	S		S complete kit	M complete kit	L complete kit	S neck ring kit	M neck ring kit	L neck ring kit	4A13 4A10
The kit size must be	Produ	uct	ltem N°.	4A90	4A91	4A92	4A35	4A36	4A50	4A11 4A11
chosen in accordance	Anterior part with two	hinges	4A02	x 1			x 1			The second second
with the width of the	Anterior part with two	hinges	4A38		x 1			x 1		
neck ring.	Anterior part with two	hinges	4A51			x 1			x 1	4A09 4A02
	Posterior part with dov	wel pin	4A08	x 1			x 1			
and the second	Posterior part with dov	wel pin	4A43		x 1			x 1		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
a second second	Posterior part with dov	wel pin	4A55			x 1			x 1	4A15
	Simple posterior part		4A09	x 1			x 1			4A02 = 95 mm
	Simple posterior part		4A44		x 1			x 1		4A38 = 110 mm 4A51 = 125 mm
	Simple posterior part		4A54			x 1			x 1	
	Left posterior occipital	pad	4A11	x 1			x 1			the loss
	Left posterior occipital	pad	4A45		x 1	x 1		x 1	x 1	11
	Right posterior occipit	al pad	4A13	x 1			x 1			4425
	Right posterior occipit	al pad	4A47		x 1	x 1		x 1	x 1	
The second second	Chin plate		4A15		x 1			x 1		
	Chin plate Drilled posterior upright	nt	4A16		x 2					
E	Tapped posterior uprig	Jht	4A17		x 2					
	Drilled anterior upright	t	4A22		x 1					
	Drilled anterior upright Tapped anterior upright	nt	4A23		x 1					
	T-guide plate		4A25		x 1					4A16 4A17 4A
	Assembly lock		4A19		x 2					4417
	Locking button for neo	k ring	4A10		x 1			x 1		¥/2. 11 ±0
	Ass. screws for occipit	al pads	5W051		x 4			x 1		
	Ass. screws for occipit	al pads	5W052		x 2					
	Ass. screws for occipit Ass. shoulder screws for	or posterior upright	5W053		x 2					4A10
	Ass. shoulder screws for	or anterior upright	5W054		x 1					- 4A19
	Stud screw for support	t hand strap	5W055		x 6					
	Ass. screws for neck ri	ng	WMCL4005Z		x 4			x 4		
	Ass. screws for upright	:s	WMCL4008Z		x 2					WMCL4005Z
/051 5W052 5W053 5W054 5W055	Ass. screws for T-guide	e plate	WMCL4010Z		x 3					WMCL4008Z





TABLE OF CONTENTS

KNEES ANKLES FEET

COMPONENTS LINERS &

LINERS & SOCKETS ORTHOSIS

MATERIALS

### Lyon spinal orthoses (kit and parts)

SYNSYS



4C28 4C25

4C31

		Kit for Child	Kit for Teenager								
Product	ltem N°.	4C99 including	4C98 including	Material	Length	Upright section	Hole Ø	Perf. type	Tapped holes	Cond.	4C15 4C17
Posterior upright for child	4C15	x 1	•		500 mm / 19.68"			<u> </u>			SUI.
Posterior upright for teenager	4C17	•	x 1		600 mm / 23.62"			Simple			4C16 4C18 4C4
Posterior upright for child	4C41	•	•	Light	500 mm / 19.68"	30 x 4 mm	F (0.0"				4C18 4C4 4C4
Posterior upright for teenager	4C42	•	•	alloy	600 mm / 23.62"	1.18 x 0.16"	5 mm / 0.2"	Double		x 1	4055
Anterior upright child	4C16	x 1	•		500 mm / 19.68"						4035
Anterior upright teenager	4C18	•	x 1		600 mm / 23.62"			Mixed			
Junction plates	4C55	x 10	x 10		60 mm / 2.36"				2	x 10	40
Junction plates	4C81	•	•		40 mm / 1.57"				1	x 2	4C14
L-shaped plate with holes	4C07	x 6	x 6		100 mm / 3.94"					x 6	4C43 4C84
12 mm upright hinge	4C21	x 1	x 1		80+12 mm / 3.15+0.47"						
20 mm upright hinge	4C25	x 1	x 1		80+20 mm / 3.15+0.78"						
Pelvis hinge	4C28	x 1	x 1		110+90 mm / 4.33+3.54"						
Pelvis plate	4C31	x 1	x1	Stainless	170 mm / 6.69"					x1	
Short 20 mm hinge	4C80	•	•	steel	45 mm / 1.77"						
Small junction bar	4C44	x 1	x 1		250 mm / 9.84"	16 x 2 mm					
Junction bar	4C43	•	•		300 mm / 11.81"	0.63 x 0.08"	7,2 mm / 0.28"(x7)				4C43
Junction bar	4C53	•	•		120 mm / 4.72"	16 x 1 mm 0.63 x 0.04"	5,2 mm / 0.2" (x1) 7,2 mm / 0.28" (x4)			x2	4C53
Junction bar	4C83	•	•		300 mm / 11.81"	16 x 2 mm	7,2mm / 0.28''(x7)				
Junction bar	4C84	•	•		250 mm / 9.84"	0.63 x 0.08"	5,2 mm / 0.2" (x5)				
Sternal support	4C03	x 1	x 1	Light alloy	60 mm / 2.36"				2	x1	4C03
Sternal support	4C66	•	•	Stainless steel	105 mm / 4.13"				6	XI	
1/4 turn button with triangular ring	4C33	•	•								
L-shaped plate	4C37	•	•		100 mm / 3.94"					1	







4C66

TABLE OF CONTENTS

KNEES ANKLES FEET

COMPONENTS LINERS & SOCKETS

ORTHOSIS MATERIALS

### **Boston spinal orthoses (kit and parts)**

SYNSYS

#### 15° lordosis modules



Waist	Hips	Distance between iliac crests	Item N°.
40 cm / 15.75"	54 cm / 21.26"	14 cm / 5.51"	4D11-J1
42 cm / 16.54"	58 cm / 22.83"	15 cm / 5.91"	4D11-J2
45 cm / 17.72"	62 cm / 24.41"	16 cm / 6.30"	4D11-J3
46 cm / 18.11"	67 cm / 26.38"	18 cm / 7.09"	4D11-Y1
47 cm / 18.50"	64 cm / 25.20"	17 cm / 6.7"	4D11-J4
47 cm / 18.50"	71 cm / 27.95"	19 cm / 7.48 "	4D11-Y2
48 cm / 18.90"	75 cm / 29.53"	20 cm / 7.87"	4D11-Y3
51 cm / 20.08"	66 cm / 25.99"	17 cm / 6.70"	4D11-Y1A
51 cm / 20.08"	79 cm / 31.10"	23 cm / 9006"	4D11-Y4
52 cm / 20.47"	82 cm / 32.28"	24 cm / 9.45"	4D11-Y5
54 cm / 21.26"	86 cm / 33.86"	25 cm / 9.84"	4D11-Y7
55 cm / 21.65"	72 cm / 28.35"	20 cm / 7.87"	4D11-Y2A
56 cm / 22.05"	84 cm / 33.07"	24 cm / 9.45"	4D11-Y6
56 cm / 22.05"	88 cm / 34.65"	25 cm / 9.84"	4D11-Y8
57 cm / 22.44"	78 cm / 30.71"	21 cm / 8.27"	4D11-Y3A
57 cm / 22.44"	80 cm / 31.50"	22 cm / 8.66"	4D11-Y4F
58 cm / 22.83"	82 cm / 32.28"	23 cm / 9.06"	4D11-Y5F
60 cm / 23.62"	86 cm / 33.86"	24 cm / 9.45"	4D11-Y7F
60 cm / 23.62"	92 cm / 36.22"	26 cm / 10.24"	4D11-Y9
62 cm / 24.41"	94 cm / 37.01"	27 cm / 10.63"	4D11-A1
63 cm / 24.80"	84 cm / 33.07"	23 cm / 9.06"	4D11-Y6A
63 cm / 24.80"	92 cm / 36.22"	25 cm / 9.84"	4D11-Y9A
64 cm / 25.20"	88 cm / 34.65"	24 cm / 9.45"	4D11-Y8F
66 cm / 25.99"	96 cm / 37.79"	25 cm / 9.84"	4D11-A2A
68 cm / 26.77"	92 cm / 36.22"	25 cm / 9.84"	4D11-Y9F
68 cm / 26.77"	97 cm / 38.19"	27 cm / 10.63"	4D11-A3
69 cm / 27.17"	86 cm / 33.86"	24 cm / 9.45"	4D11-Y7A
70 cm / 27.56"	94 cm / 37.01"	26 cm / 10.24"	4D11-A2
72 cm / 28.35"	90 cm / 35.43"	24 cm / 9.45"	4D11-Y8A
76 cm / 39.92"	97 cm / 38.19"	27 cm / 10.63"	4D11-A4

#### **Boston pads**

Part	Size	Side	ltem N°.
Lumbar	S	Left	4D110
Thoracic	S	Right	4D117
Abdominal	S		4D130
Abdominal	L		4D131



#### **Straps for Boston spinal orthosis**

Width	Length	Color	Material	Packaging	ltem N°.
25 mm	450 mm	White	Terylene	x 4	4X010
0.98"	17.72"	Skin color	Cotton	x 4	4X011-L45









TABLE OF CONTENTS

KNEES ANKLES FEET COMPONENTS

LINERS & SOCKETS

MATERIALS

ORTHOSIS

### **Components for antikyphosis spinal orthosis**

SYNSYS

Hinges

Product	Length	Material	ltem N°.
Standard hinge	20	Chair I an a that I	4C01
Short hinge - 20 mm / 0.79"	20 mm / 0.79"	Stainless steel	4C80

Joints and supports				Sternal support adjustable joint Right Kit	Sternal support adjustable joint Left Kit	
	Product	Side	ltem N°.	4C45	4C60	Material
<i>A</i> <b>b</b>	Upper joint piece	Right	4C46	x 1		
d 6	opper joint piece	Left	4C49		x 1	Nickel-plated steel
*	Lower joint piece	Both	4C51	x 1	x 1	
	Manubrial support	-	4C66			Stainless steel

#### **Sternal plates**

Product	Patient's size	Length	Thickness	Material	ltem N°.
Chaunal minto	L	145 mm / 5.71"			4C67
Sternal plate	S	138 mm / 5.43"			4C68
Upright for sternal support	-	344 mm / 13.54"	3 mm / 0.12"	Light alloy	4C69







TABLE OF CONTENTS SYNSYS KNEES ANKLES FEET COMPONENTS LINERS & SO

LINERS & SOCKETS ORTHOSIS

MATERIALS

### **Components for spinal orthosis**

Blocking-up block

Side	Length	Material	Packaging	ltem N°.
Right	100 mm / 700"	Staiplace staal	x 1	4F001-D
Left	180 mm / 7.09"	Stainless steel	x 1	4F001-G

#### Bar and deck plate set

					Kit	
Product	Length	Width	Thickness	ltem N°.	9Z003	Material
Bar	245 mm / 9.65"	18 mm / 0.71"	4 mm / 0.16"	9Z003001	x 1	Polyethylene
Deck	60 mm / 2.36"	20 mm / 0.79"	1,5 mm / 0.06"	9Z003002	x 1	Aluminum


#### Screw

	Product	Material	Packaging	ltem N°.
2	M5-knurled assembly screw	Nickel-plated steel	x 50	5W056





# **MATERIALS**

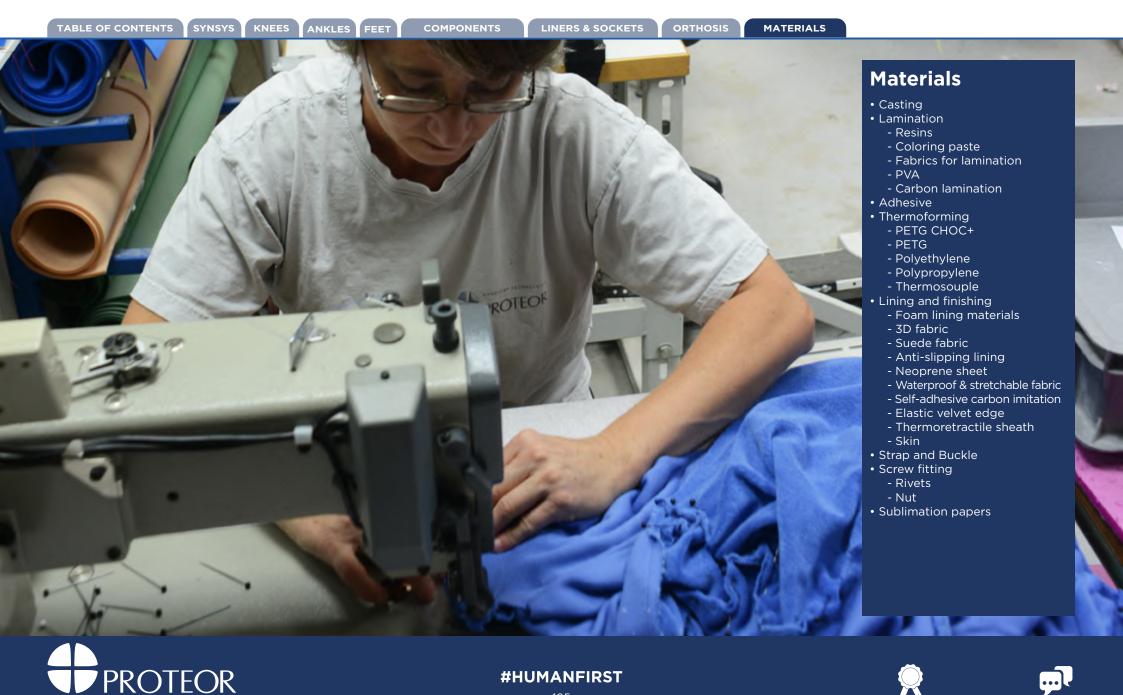



### Casting

TABLE O	F CONTENTS	NSYS KNEES	ANKLES FEET	COMPONENT	S LINERS &	SOCKETS ORTHOSIS	MATERIALS	
Castin	g							
	Cotton tubular	jersey				Plaster sanding net		
		for body protection	r-repellent, hypoallerg during casting.	genic.				
Width	50 mm / 1.97"	70 mm / 2.76"	100 mm / 3.94"	150 mm / 5.90"	200 mm /'7.87''		1 m / 3.28 ft	
Length			25 m / 82.02 ft				1 m / 3.28 ft	
ltem N°.	TJ001	TJ002	TJ003	TJ004	TJ005		5D850	







# Lamination

TABLE OF COM	NTENTS SYNSYS KNEES ANKLES	FEET COMPONENTS LINERS & SC	OCKETS ORTHOSIS MATERIALS	
Resins				
	PROACRYL	PROACRYL for hot climate countries	PROCARB	PROACRYL hardener
	<ul> <li>For rigid lamination with all type of fibers except carbon fibers.</li> <li>Tough and lightweight.</li> <li>Well tolerated by the skin.</li> </ul>	<ul> <li>For rigid lamination.</li> <li>Tough and lightweight.</li> <li>Well tolerated by the skin.</li> <li>Withstands high storage temperatures.</li> </ul>	<ul> <li>Its fluidity makes it particularly suitable for laminations with carbon fibers.</li> <li>For rigid lamination.</li> <li>Tough and lightweight.</li> <li>Well tolerated by the skin.</li> </ul>	<ul> <li>Necessary for resins polymerization.</li> <li>To use only with PROACRYL and PROCARB resins.</li> <li>Measure included.</li> </ul>
Mixing ratio	3 % (PC233-A)	3 % (PC233-A)	3 % (PC233-A)	
Packaging	4,5 kg / 9.92 lbs	4,5 kg / 9.92 lbs	4,5 kg / 9.92 lbs	150 g / 0.33 lbs
ltem N°.	PC230-5	PC230-5S	PC234 -5	PC233-A

### **Coloring paste**

	Skin color	Light	Oriental	Medium brown	Ebony brown
all all a l	- Especially made for PROACRYL ar - Good coating quality.	d PROCARB resins.			
ing	150 g		1	10 g	







# Lamination



						- Very good resistance.							- Multipurpose, ide layer for lamination	
Width	80 mm 3.15"	100 mm 3.94"	120 mm 4.72"	150 mm 5.90"	200 mm 7.87"	80 mm 3.15"	120 mm 4.72"	140 mm 5.51"	160 mm 6.30"	180 mm 7.08''	200 mm 7.87"	200 mm / 7.87"	40 mm / 1.57"	58 mm / 2.28"
Packaging	1 kg / 2.20 lbs				1 kg / 2.20 lbs						2 kg / 4.40 lbs	25 m / 82 ft		
ltem N°.	TP100	TP101	TP102	TP103	TP104	TV130	TV131	TV134	TV132	TV135	TV133	TJO20	TTO11	TTO11-XL

#### **PVA**


5	PVA bag			PVA Film			
	- Good elasticity. - Excellent resistance - Can be easily welde - Particularly suitable	d.	as PROACRYL and PR	OCARB.	A	3 C	<ul> <li>Elasticity : 450 %.</li> <li>Excellent resistance to tear.</li> <li>Can be easily welded.</li> <li>Particularly suitable for acrylic resins such as PROACRYL and PROCARB.</li> </ul>
Width A	150 mm / 5.90"	200 mm / 7.87"	250 mm / 9.84"	300 mm / 11.81"	350 mm / 13.78"	400 mm / 15.75"	1.01 m / 39.37"
Width C			50 mm	Thickness 0.08 mm / 0.0031"			
Length B			900 mn	22 m			
ltem N°.	PL030-4	PL030-3	PL030-2	PL030-1	PL030-0	PL030-6	PL030







# Lamination

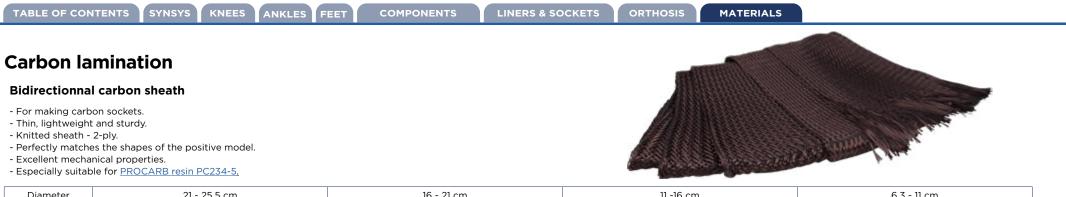

Diameter	21 - 25,5 cm		16 - 21 cm		11 -16	õ cm	6,3 - 11 cm		
Circumference	65 - 8	30 cm	50 - 65 cm		35 - 50 cm		20 - 35 cm		
Length	5 m	25 m	5 m	25 m	10 m	25 m	10 m	25 m	
ltem N°.	TC009-8065#5	TC009-8065#25	TC009-6550#5	TC009-6550#25	TC009-5035#10	TC009-5035#25	TC009-3520#10	TC009-3520#25	

#### **Bidirectionnal carbon fiber fabric**

- To make laminated reinforcements.
- Weight: 285g/m<sup>2</sup>



Width	1,25 m								
Packaging	1 m cut	2 m cut	roll 5 m	roll 10 m	roll 25 m				
ltem N°.	TC031#01	TC031#02	TC031#05	TC031#10	TC031#25				









# **ODHESIVE OND TOOLS**

20 g

XC050

TABLE OF	CONTENTS SYNSYS KNEES ANKLES FEET CO	DMPONENTS LINERS & SOCKETS ORTHOSIS	MATERIALS	
Adhesiv	/e			
			99	
	Fast-Setting Cyanoacrylate Adhesive	Neoprene adhesive	Adhesive tape	
	<ul><li>Particularly suitable for quick bonding of plastics and foams.</li><li>Adapted for 3 parts Foot</li></ul>	- Particularly suitable for bonding foams, plastics and leather.	- PVC transparent tape	
Width		-	25 mm	50 mm

Packaging Item N°.



0,75 l

XC090#0,75

	Slab with pins
	<ul> <li>Slabs of polyurethane pins to be set on a table.</li> <li>This system allows user to cut plastic plates, comfortably and safely.</li> <li>Prevents the dust from spreading.</li> <li>High durability.</li> </ul>
Width	10 cm
Length	20 cm
Weight	260 g
Packaging	x1
ltem N°.	5G42001



**#HUMANFIRST** 




3 x 25 m

XX090

XX090#25



## THERMOFORMING

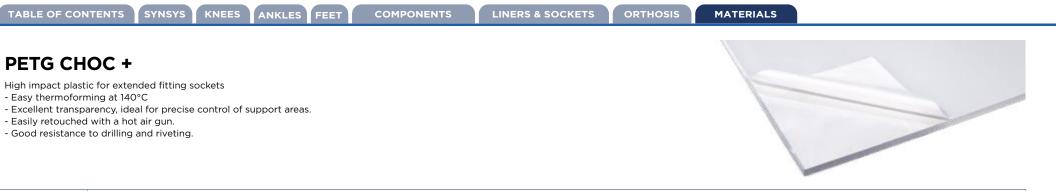

Use	For treatment corset, extended trial orthosis and extended trial socket							
Thickness	6 mm	10 mm 12 mm						
Width	1000 mm	400 mm						
Length	2050 mm	400 mm						
Heating T°		140°C max						
Heating Time	20'							
ltem N°.	PL18106-L	PL18110-S	PL18112-S					



## PETG

- Excellent transparency.

- Good impact resistance.

- Can be easily rectified with heat gun.

- Low shrinkage.

Use	Particularly convenie	nt for spinal orthosis	Particularly convenient for test sockets				
Thickness	4 mm	5 mm	10 mm	12 mm	15 mm		
Width	1000	) mm	400 mm				
Length	2000	) mm	400 mm				
Heating T°	150°C > 160°C		170°C max				
ltem N°.	PL18004-L	PL18005-L	PL18010-S	PL18012-S	PL18015-S		










## THERMOFORMING

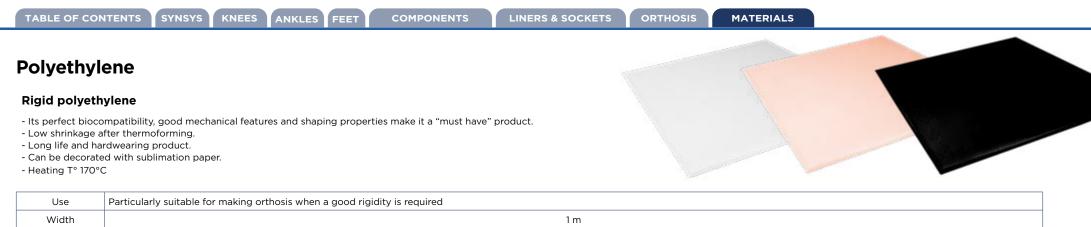

Width		1m													
Length		1,18 m			2 m										
Tickness	3 mm	4 mm	8 mm	2 mm	3 mm		4 mm		5 mm	6 r	nm	8 r	nm	10 mm	12 mm
Color	$\bigcirc$	0	0	$\bigcirc$	$\bigcirc$	0		•	0	0		0		$\bigcirc$	$\bigcirc$
ltem N°.	PL13103-C	PL13104-C	PL13108-C	PL13102-L	PL13103-L	PL13104-L	PL30104-L	PL30504-L	PL13105-L	PL13106-L	PL30506-L	PL13108-L	PL30508-L	PL13110-L	PL13112-L

### Flexible polyethylene

- This material provides the patient with smooth support and comfort.
- Can be decorated with sublimation paper.
- -1 mm thickness is particularly suitable for making tongues.
- Heating T° 120 > 170°C

Use	articularly suitable for geriatric, neonatal or post-operative fitting								
Width	0,4 m	0,5 m 1 m							
Length	0,4 m	0,5 m	1 m	2 m					
Thickness	5 mm	12 mm	1 mm	1 mm	2 mm	3 mm	4 mm	5 mm	
Item N°.	PL12005-S	PL12312	PL12001-SL	PL12001-L	PL12002-L	PL12003-L	PL12004-L	PL12005-L	









## THERMOFORMING

TABLE OF CO	NTENTS SYNSYS KNEES ANKLES FE	EET COMPONENTS LINERS & S	SOCKETS ORTHOSIS MATERIALS	
Polyprop				
- Great resistance - Easy to work. - High resistance	ted with sublimation paper.			
Use	Particularly suitable for orthosis such as AFO and te	emporary sockets		
Width			1 m	
Length			2 m	
Thickness	3 mm	4 mm	5 mm	12 mm
ltem N°.	PL14003-L	PL14004-L	PL14005-L	PL14012-L

### Thermosouple

- This copolymer provides flexibility and comfort.
- Requires an external rigid socket.
- Can be easily shaped when hot.
- Heating T° 150°C

Use	Particularly convenient to make inner sockets								
Width	0,4 m								
Length	0,4 m								
Thickness	6 mm 9 mm 12 mm 15 mm								
Hardeness	Soft	Soft	Soft	Extra soft	Extra soft				
Item N°.	PL13606-S	PL13609-S	PL13612-S	PL14612-S	PL14615-S				













### POLYTECH: PE + EVA FOAM

- Closed cell foam.
- Easy to machine.
- Perfectly matches the most complex mold shapes.
- Density 110 kg / m³
- Width 1 m / Length 2 m  $\,$
- Thermoformable at 170°C

Thickness	5 mm	7 mm	10 mm
Item N°.	PL500-05	PL500-07	PL500-10









TABLE OF CONTENTS	SYNSYS	KNEES	ANKLES	FEET	COMPONENTS	LINERS & SOCKETS	ORTHOSIS	MATERIALS	
Foam lining ma	aterials								
Memory Foam									
- Very comfortable, it absor - It gets back to its initial sh									
- Its strong bonding capacit - Width 410 mm / Length 61	y adhesive is a			y surface	s like plastics, wood, meta	al, cardboard, etc.			
Thickness							10 mr	n	

Thickness	10 mm
Item N°.	EL093

#### High density foam: PE + EVA Foam

- Particularly convenient to make tabs.
- Easy to machine.
- Perfectly matches the most complex mold shape.
- Perforated material.
- Density 400 kg / m<sup>3</sup>
- Width 0,85 m / Length 0,85 m
- Thermoformable at 130°C.

Thickness	2 mm
Item N°.	PL4D16

#### Marble EVA Foam

- Closed cell foam.
- Lightweight, comfortable and resistant to rubbing.
- Ideal for orthosis finishing. Long life product.
- Density 240 kg / m³
- Width 1,05 m / Length 2,10 m
- Thermoformable at 80°C.

Thickness	s 2 mm				
Color	Black	Blue	Fuchsia		
Item N°.	PL52002-01	PL52002-02	PL52002-03		












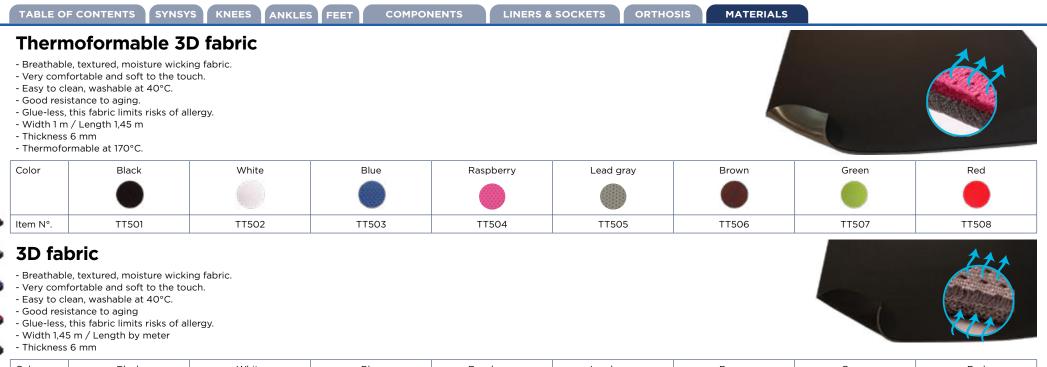

Color	Black	White	Blue	Raspberry	Lead gray	Brown	Green	Red
							•	•
Item N°.	TT381	TT382	TT383	TT384	TT385	TT386	TT387	TT388

## Single layer 3d fabric waterproof

- Stretchable, breathable, comfortable 3D fabric.

- Waterproof thanks to the associated fl exible fi Im.

- Very comfortable and soft to the touch.
- Ideal for making covers with waterproof areas.
- Width 1,45 m / Length by meter
- Thickness 3 mm

Color	Black	White	Blue	Raspberry	Lead gray	Red
						•
ltem N°.	TT391	TT392	TT393	TT394	TT395	TT396









TABLE OF	CONTENTS SYNSYS	KNEES ANKLES	FEET	COMPONENTS	LINERS & SOCKETS	ORT	тнозіз	MATERIALS	
Ripsto	op suede fabri	c							
- Very comf - Easy to cle	allows it to have strong res ortable contact, soft and fl ean, washable up to 40°C. tance to ageing.		ouch.						
Thickness					 4,5 mm				
Width					1,45 m				
Length		by m	eter					10 m	
Item N°.		TTE	00					TT600#	10

### Self-adhesive suede fabric

- It is recommended for inside or outside lining of orthosis.

- Very comfortable contact, soft and fl exible to the touch.

- Fabric with a powerful adhesive.

- Good resistance to ageing.

Thickness	1,5 mm
Width	1,50 m
Length	by meter
ltem N°.	TT410

### **Anti-slipping lining**

- Particularly suitable for lining of orthosis closure bands.

- This copolymer provides optimal adhesion to the patient skin, the back side can be fixed with hook.

- Relieves friction spots.

- Easy to clean with water and soap.

Thickness	6 mm
Width	0,30 m
Length	0,30 m
Item N°.	TT450











TABLE OF	CONTENTS SYNSYS KNEES ANKLES FEET COMPONENTS LINERS & SOCKETS ORTHOSIS MATERIALS
Neopi	ene sheet
- Neoprene	y suitable for lining orthosis and the confection of plastron. sheet with one side in polyester fabric, the back side can be fi xed with hook. an, washable up to 40°C.
Thickness	5 mm
Width	1.45 m
Length	0,99 m
ltem N°.	TT460
·	

### Waterproof & strechable fabric

- Extensibili - Excellent	or ly suitable for making waterproof covers. ity (bi stretch). mechanical strength. ean, washable at 40°C for TT372 and up to 90°C for TT373#10.		
Thickness	2,5 mm (with foam)		1 mm (without foam)
Width		1,45 m	
Length	by meter		10 m
ltem N°.	TT372		TT373#10

## Self-adhesive carbon imitation

- This vinyl is particularly recommended for the lining of orthosis.

- It allows the covering of any material in order to get a «carbon-fi ber» appearance.

- Resistant and easy to apply (with a heat gun).

- Adhesive side for immediate bond, optimal after 24h.

Width	1.52 m
Length	1 m
ltem N°.	TH001











Red	Blue	Wr
1,2	m	
	19 mm	

Length	1,2 m					
Diameter	18 mm		19 mm			
ltem N°.	PL02408	PL02406	PL02407	PL02405	PL02404	

### Skin

Туре	Horse skin	Chamois skin	Imitation Leather	
Use	Sheathing of uprights and 1st choice liner	Inside lining of lower limb orthosis & wooden lower limb prosthesis	Soft for sheathing of lower limb orthosis and prosthesis	
Thickness	0,7 - 1 mm	1 - 1,5 mm	2 mm	
Color	Beige	Natural	White 🔘	
Packaging	±1,5 m²	±0,5 m²	±1,5 m²	
Item N°.	C034	C050	C012	







# STROP OND BUCKLE

London

TABLE OF CONTENTS

SYNSYS **KNEES** ANKLES

FEET **COMPONENTS**  **LINERS & SOCKETS** ORTHOSIS MATERIALS

### A full range of straps and pads, including chafe and loop.



**PROTEOR LOGO** PROTEOR marking available for signaled colors; replace

CC by CM when ordering reference



### MARKING

100 pieces minimum in same size and color. Please, contact us to get an estimate, from 100 straps.

LORED

0



SELF-GRIPPING STRAP PVC PAD Pack. 400 mm 680 mm 150 mm Length 300 mm 500 mm Strap Width 16 mm 25 mm 40 mm 16 / 25 mm 25 / 40 mm x 10 2X49-CV300R Texas 2X79-CV300R 2X49-CV500R 2X59-CV400R 2X59-CV680R 2X89 2X69 x 100 2X79-CC300R 2X49-CC300R 2X49-CC500R 2X59-CC400R 2X59-CC680R Texas marked x 10 Sevilla 2X709-CV300R 2X409-CV300R 2X409-CV500R 2X509-CV400R 2X509-CV680R 2X805 2X605 x 100 Sevilla marked 2X709-CC300R 2X409-CC300R 2X409-CC500R 2X509-CC400R 2X509-CC680R x 10 2X701-CV300R 2X401-CV300R 2X401-CV500R 2X501-CV400R 2X501-CV680R 2X801 2X601 Sydney x 10 New Dehli 2X702-CV300R 2X402-CV300R 2X402-CV500R 2X502-CV400R 2X502-CV680R 2X802 2X602 x 10 Tokvo 2X70-CV300R 2X40-CV300R 2X40-CV500R 2X50-CV400R 2X50-CV680R 2X85 2X65 x 100 2X70-CC300R 2X40-CC300R 2X40-CC500R 2X50-CC400R 2X50-CC680R Tokyo marked x 10 Alaska 2X75-CV300R 2X45-CV300R 2X45-CV500R 2X55-CV400R 2X55-CV680R 2X81 2X61 x 10 Moscou 2X713-CV300R 2X413-CV300R 2X413-CV500R 2X513-CV400R 2X513-CV680R 2X818 2X618 x 10 2X719-CV300R 2X419-CV300R 2X419-CV500R 2X519-CV400R 2X63 Oslo 2X519-CV680R 2X83 x 100 Oslo Marked 2X719-CC300R 2X419-CC300R 2X419-CC500R 2X519-CC400R 2X519-CC680R x 10 2X721-CV300R 2X421-CV300R 2X421-CV500R 2X521-CV400R 2X521-CV680R 2X809 2X609 Shanghai x 100 Shanghai marked 2X721-CC300R 2X421-CC300R 2X421-CC500R 2X521-CC400R 2X521-CC680R x 10 2X714-CV300R 2X414-CV300R 2X414-CV500R 2X514-CV400R 2X514-CV680R 2X819 2X619 Auckland x 100 Auckland marked 2X714-CC300R 2X414-CC300R 2X414-CC500R 2X514-CC400R 2X514-CC680R x 10 Amsterdam 2X708-CV300R 2X408-CV300R 2X408-CV500R 2X508-CV400R 2X508-CV680R 2X808 2X608 x 100 Amsterdam marked 2X708-CC300R 2X408-CC300R 2X408-CC500R 2X508-CC400R 2X508-CC680R x 10 Lima 2X71-CV300R 2X41-CV300R 2X41-CV500R 2X51-CV400R 2X51-CV680R x 100 Lima marked 2X71-CC300R 2X41-CC300R 2X41-CC500R 2X51-CC400R 2X51-CC680R x 10 2X77-CV300R 2X47-CV300R 2X47-CV500R 2X57-CV400R 2X57-CV680R

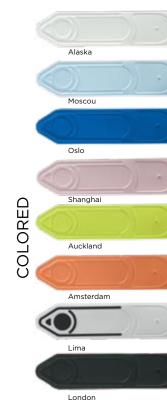








TABLE OF CONTENTS SYN	NSYS KNEES ANKLES FEET COMPONENTS	LINERS & SOCKETS ORTHOSIS MATERIALS
Self-gripping strap	p	
Fabric strap (x10)		
<ul> <li>Flexible, comfortable and washat</li> <li>Ideal for areas sensitive to rubbin</li> <li>One size. Can be easily cut with s</li> <li>Delivered with roller chafe to facility</li> </ul>	ing. scissors.	-
Length		290 + 125 mm
Width	25 mm	40 mm
Item N°.	2X100-2525	2X100-4025
Velvet strap (x10)		
<ul> <li>Flexible, comfortable and washat</li> <li>It is ideal for friction sensitive are</li> <li>Better comfort thanks to the buil</li> <li>Impressive gripping strength that</li> <li>Delivered with roller chafe to fact</li> </ul>	reas. iilt-in flap. anks to the micro hook.	
Width	25 mm	40 mm
Item N°.	2X098-2525	2X098-4025
Micro-hook strap (x10) - Velvet-hemmed loop band, assoc - Optimal implementation: can be - Delivered with roller chafe to faci	e cut to the desired length.	
Width	25 mm	40 mm
ltem N°.	2X099-25	2X099-40
Silicone coated cushions. - A siliconized surface and a surface - Ideal for preventing the slippage - Allows a comfortable interface be - Biocompatible silicone. - Thickness ± 5 mm - Can be used with 2X098-2525 or	ace with a hook strip to attach to the straps. e of an orthosis. between the patient and the strap.	

Length	100 mm
Width	38 mm
Item N°.	2X03









TABLE OF CONTE	ENTS SYNSYS KNEES ANKLES FEET COMPONENTS LIN	ERS & SOCKETS ORTHOS	SIS MATERIALS		
Hook and k Comfort pad	oop strap.				
- The hooks on one s	areas sensitive to rubbing. ide make it easy to attach to loop. one to prevent the orthosis from slipping. d to 2X100-4025			20/	
Silicone Antislip	No		Yes		
Length	1m				
Width	Width 50mm				
Packaging		By meter			
ltem N°.	2X100-N		2X100-NS		

#### Micro-hook

- Very flat, soft to the touch.
- Exceptional gripping capacity.
- Bonds easily to many supports like polyethylene, polypropylene, PVC, polyamide, wood, glass, cardboard, metal.
- Precut round pieces.
- Adhesive side for immediate bond, optimal after 24h.

Diameter	15 mm	25 mm	
Color	Black	Transparent	
Packaging	x 800	x 400	25 m
Item N°.	TT217-15	TT217-25	TT215-25

### Adhesive backed hook & loop strap

- Fastening system made of separate hook straps and loop straps.

- Easy to install as the straps are backed with strong bonding capacity adhesive.

- The adhesive is specially designed to bond to a variety of surfaces like polyethylene, polypropylene, PVC, polyamide, wood, glass, cardboard and metal.

- Long-lasting and suitable for intensive use.

Length	25 m					
Color	Black			White		
Width	25 mm	38 mm	50 mm	25 mm	38 mm	50 mm
Loop Item N°.	TTA501-25A	TTA501-38A	TTA501-50A	TTA502-25A	TTA502-38A	TTA502-50A
Hook Item N°.	TTC501-25A	TTC501-38A	TTC501-50A	TTC502-25A	TTC502-38A	TTC502-50A









TABLE OF CC	NTENTS SYNSY	S KNEES ANKL	ES FEET CO	MPONENTS L	LINERS & SOCKETS	ORTHOSIS	MATERIALS		
Fixing strap									
- Allows for upri - Retractable usi	ght lining.								
Color	Black		White			Blue	Fuchsia		
Length	25 m								
Width	25 mm	38 mm	50 mm	20 mm	25 mm	38 mm	50 mm	25 mm	25 mm
Loop Item N°.	TTA501-25	TTA501-38	TTA501-50	TTA502-20	TTA502-25	TTA502-38	TTA502-50	TTA503-25	TTA504-25
Hook Item N°.	TTC501-25	TTC501-38	TTC501-50	TTC502-20	TTC502-25	TTC502-38	TTC502-50	TTC503-25	TTC504-25



#### Polypropylene strap

- 311-3									
Color	Black		White		Blue		Fuchsia		
Length	50 m								
Width	20 mm	25 mm	40 mm						
ltem N°.	TT029-01	TT027-01	TT028-01	TT027-02	TT028-02	TT027-03	TT028-03	TT027-04	TT028-04

#### Elastic loop strap

- Adjustable and variable compression.
- Perfectly matches the skin relief.
- Easy cutting.

Easy catting.	Lasy cutting.				
Color	Wr	hite	Black		
Length		25	i m		
Width	25 mm	50 mm	25 mm	50 mm	
ltem N°.	TT190-25	TT190-50	TT191-25	TT191-50	









TABLE OF C	CONTENTS SYNSYS KNEES ANKLES FEET COMPONENTS LINER	S & SOCKETS ORTHOSIS MATERIALS
Fixing st	trap	
Ratchet str	ap x 10	
Length	315 mm	225 mm
Width		22 mm
ltem N°.	2X80	2X80-S



### Handle with molded coating & fixing plates

- Fixing plates makes easy riveting or drilling.

- For standing devices ans seat-braces.

Width	270 mm
ltem N°.	PY000003











### **Plastic buckle**

### Side release buckle with simple adjustment x 10

Color	Black						
Width	20 mm	25 mm	40 mm				
Item N°.	KF045-20	KF045-25	KF045-40				

#### Side release buckle with double adjustment x 10

Positioned quickly and accurately thanks to the adjustment on each sides.
No sewing required.



### Security buckle x 10

Both hands are necessary to unlock the buckle.Reduces risks of unexpected unlocking.



### Double slide buckle x 10


Color								
Width	25 mm	40 mm						
ltem N°.	KF048-25	KF048-40						

### Plastic buckle with clip closure x 10

Width	25 mm					
ltem N°.	KF011					

### Push buckle (x10)

- Thin and flat they are ideal for the realization of breastplates.
- Their thinness reduces friction.

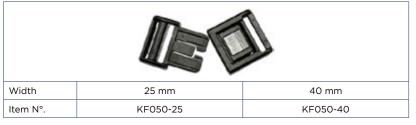

### Quicky clips (x10)

Item N°.

Space-saving quick-release fastener, specially designed by Proteor.
 Safety feature to prevent inadvertent opening.
 Tested to withstand many cycles, representing many years of use.
 Base attaches to the device with a tubular rivet.

Width 25 mm 40 mm

KF070-25



**#HUMANFIRST** 





KF070-40



### Metal buckle

Plain buckl	Plain buckle x 10									
						Shape	°	val	Recta	ngular
Width	14 mm	16 mm	18 mm	20 mm	25 mm					
Roller	yes	yes	no	yes	yes	Width	35 mm	40 mm	16 mm	25 mm
ltem N°.	KF002	KF003	KF004	KF005	KF007	Item N°.	KF022	KF023	KF028	KF020

### Chafe

Color								
Width	25 mm	40 mm	25	mm	40 r	nm		
Packaging	x 10	x 10	x 10	x 25	x 10	x 25		
Item N°.	KFF001-25	KFF001-40	KFF002-25	KFF4085-SSL	KFF002-40	KFF4087-SSL		

#### Buckle with leather attachment piece

Shape									
Width	14 mm	16 r	nm	20 mi	m	25	mm	32 mm	
Stiffness	Flexible	Medium	Flexible	Hard		Mec	lium		
Color				Natural	Natural Chromed N				
ltem N°.	1X208	1X200	1X202	1X206	1X214				







## SCREW FITTING

ORTHOSIS

TABLE OF CONTENTS SYNSYS KNEES ANKLES FEET COMPONENTS

LINERS & SOCKETS

MATERIALS

### Rivet

### Colored single cap speedy rivet

- Head Ø 13 mm

- Tube Ø 4 mm

					<							
Color	Bla	ack	Wł	nite	BI	ue	Fuc	hsia	Gr	еу	Re	ed
Height	15,6 mm	12,4 mm	15,6 mm	12,4 mm	15,6 mm	12,4 mm						
Qty	500	500	500	500	500	500	500	500	500	500	500	500
ltem N°.	KE100-500	KE200-500	KE101-500	KE201-500	KE102-500	KE202-500	KE103-500	KE203-500	KE104-500	KE204v	KE107-500	KE207-500

### Single cap speedy rivet x 100



Head Ø		8,5 mm		9,5 mm	10,5 mm	12 mm
Tube Ø	3 mm			3 mm	3 mm	3 mm
Height	8 mm	11 mm	15,6 mm	9,1 mm	11 mm	10 mm
ltem N°.	KE050	KE051	KE057	KE056	KE058	KE053



Copper rivet x 100 🥏 🔨									
Shape									
Head Ø	8 n	nm	12 mm	11 mm	14 mm	3,5 mm			
Tube Ø	3 mm	3 mm	4 r	nm	5 mm	2 mm			
Height	16 mm	25 mm	12 mm	20 mm	20 mm	5 mm			
ltem N°.	KRCL3016	KRCL3025	KRCL4012	KRCL4020	KRCL5020	KRCD2005			

### Nut

### Steel nut

Туре						
Ø	M3	M4	M5	M4	M5 M6	
Packaging		x 100		x 25	x 50	
ltem N°.	SEH030	SEH040	SEH050	SER4	SEF05	SEF06










ANKLES

FEET

COMPONENTS

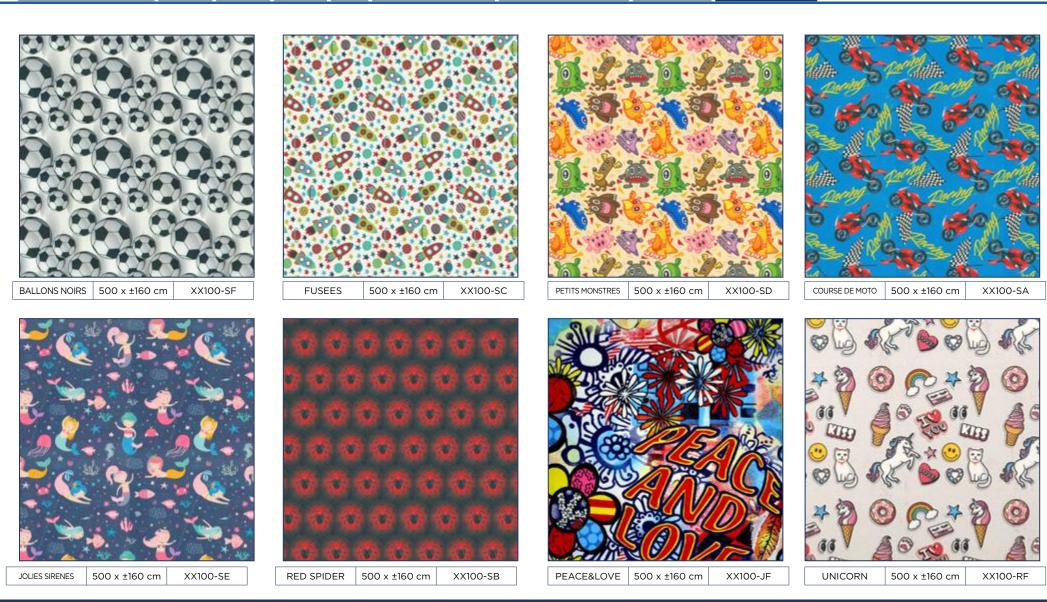

**LINERS & SOCKETS** 

ORTHOSIS

MATERIALS



TABLE OF CONTENTS

SYNSYS



ANKLES

TABLE OF CONTENTS

SYNSYS KNEES


FEET COMPONENTS

LINERS & SOCKETS

ORTHOSIS MATERIALS






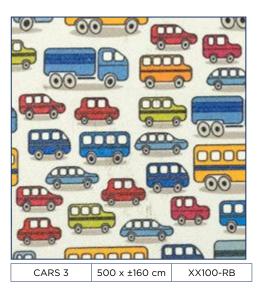





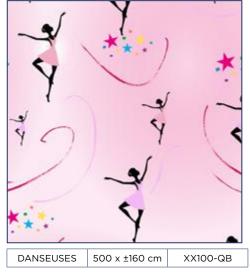





ANKLES

FEET

COMPONENTS

XX100-PJ

KNEES




ORTHOSIS

MATERIALS

LINERS & SOCKETS



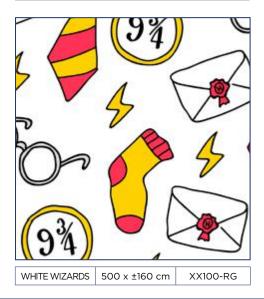

500 x ±160 cm

XX100-PB

TABLE OF CONTENTS

FEERIE

SYNSYS



FUNNY OWLS 500 x ±160 cm













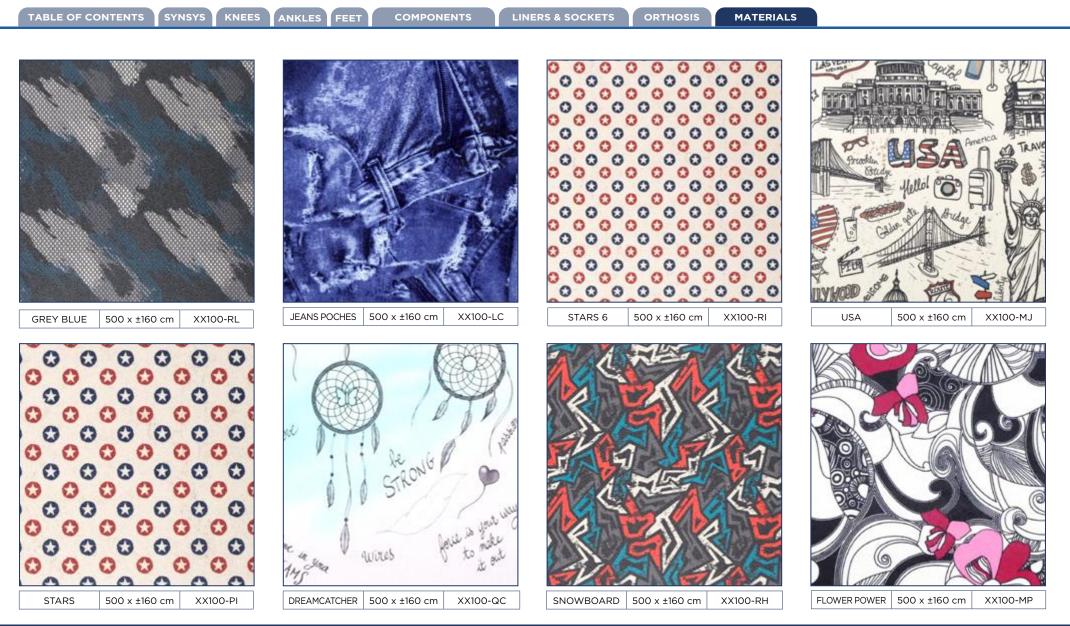







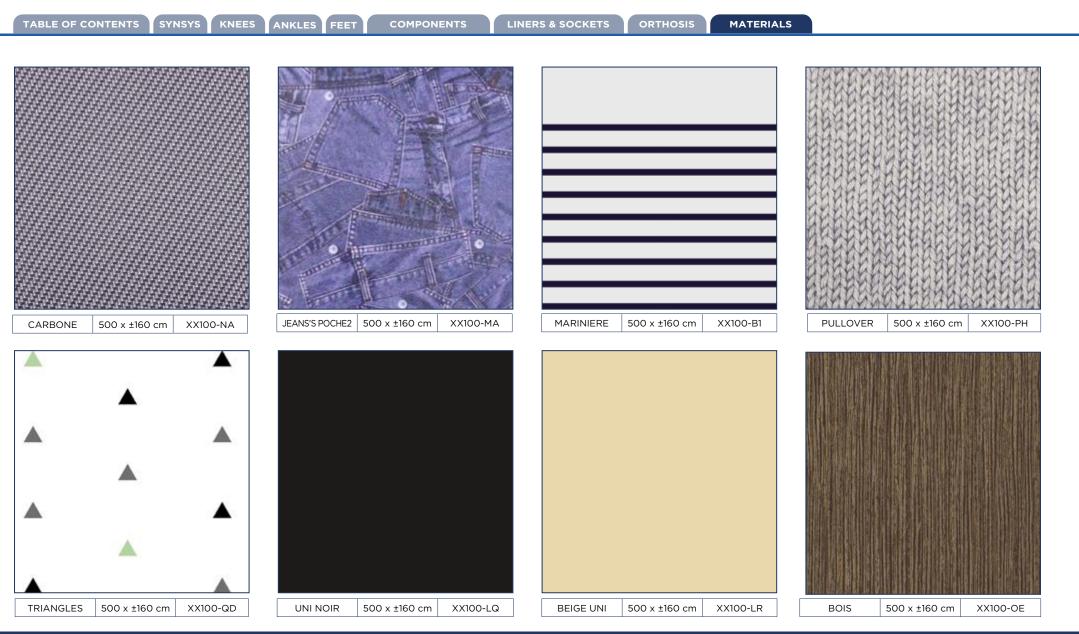







### EXPORT COMMERCIAL WARRANTY TERMS (Components and materials) SPD-00234 rev 1

These commercial warranty terms complete our general sales conditions SPD-00724 EN defining the legal warranty and our product repair and return conditions.

#### **1 - WARRANTY AND PRODUCT LIFE**

Warranty and product life are two different and complementary concepts.

•The lifetime is indicated in the device's Instruction For Use.

•In case this information is not defined in the IFU, the actual useful life is ultimately determined by the CPO upon request of the device's owner (i.e., the patient or the insurer).

•While the device is in use, device's functionality and condition might be assessed by the CPO periodically or stated otherwise in the IFU.

•We recommend the CPO to consider the device's functionality and operating conditions after the end of the period of use in order to then carry out a replacement if necessary.

Product	Standard Warranty duration	Manufacturer trai- ning required	Extended Warranty available	Service required (*)	Notes
Lower Limb Prosthetics					
Micro Processor Knees					
FREEDOM QUATTRO	3 years	Yes	Two extended warranty options at a cost A - 2 year warranty extension B - 3 year warranty extension	In the case of extended warranty A - 1st service at 36 months - one month before the anniversary date, two months after B - 2nd service at 54 months - one month before the anniversary date, two months after	Contact our Sales Department
PLIE 3	3 years	Yes	2 years warranty extension to be subscribed within 12, 24 or 36 months	Control & maintenance every year. (Revisions at 12 & 24 months)	Contact our Sales Department
HYBRID export	3 years	Yes	Yes	Control & maintenance every 2 years	Contact our Sales Department
ALLUX	2 years	Yes	Yes	Control & maintenance in year 2	Contact our Sales Department
SYNSYS	3 years	Yes	Yes	3 years warranty extension to be subscribed wit- hin 12 months of purchase	1st service at 24 months or after one million cycles of use In the case of extended warranty 2nd service at 48 months or two million cycles of use
Accessories (charger)	1 year	No	No	No	
Hydraulic, pneumatic knees					
HYDEAL	3 years	No	No	No	Mechanical and hydraulic part. Mechanical
MATIK	3 years	No	No	No	looseness after 12 months is not covered by warranty because it is due to normal wear and
HYTREK	3 years	No	No	No	tear of the product.
SYMPHONY	2 years	No	No	No	
Genoux mécaniques / Mechanical knee	S				
Mechanical knees	3 years	No	No	No	Mechanical and hydraulic part. Mechanical looseness after 12 months is not covered by warranty because it is due to normal wear and tear of the product.
Sport knee					
EASY RIDE	1 year	No	No	No	Warranty only for manufacturing defect, as- sembling error. No warranty for wear and tear (seals or any other wearing part and shock absorber).
Microprocessor ankles					
KINNEX 2.0	3 years	Yes	Yes, 2 or 3 years warranty extension at a cost to be subscribed within 12 months of purchase	No	Contact our Sales Department
Mechanical ankles					·
KINTERRA	3 years	No	No	No	



#### SPD-00234 rev 1

## EXPORT COMMERCIAL WARRANTY TERMS (Components and materials)

Product	Standard Warranty duration	Manufacturer trai- ning required	Extended Warranty available	Service required (*)	Notes
Feet					
S.A.C.H. feet, Dynastep Single Axis Foot, 3 parts foot	1 year	No	No	No	Defects of appearance showing after 6 months are not systematically covered by warranty because they depend on the product use.
Energy Storing Feet with removable foot shell. K2, K3, K4 activity le- vel. Dyna C, Dynadapt, Dynatrek, Shockwave, Sierra, Highlander, Agilix, Pacifica, Pacifica LP, Shockwave, Dynastar, Dynacity. Rush HiPro, Rush Rampage, Rampage LP, Rush HiPro, Rogue 2, Rush EVAQ8, Rush H2O,Rush Rover,	3 years	No	No	No	Manufacturing defect in the Composite Fiber structure.
RUSH Chopart	3 years	No	No	No	
Pediatric foot RUSH Kid	2 years	No	No	No	
Sport foot Easy Run	1 year	No	No	No	
Geriatric foot Gery (1A200)	1 year	No	No	No	
Foot shell	6 months	No	No	No	Aesthetic aspect defect.
Structural components					
Adapters, tube, Lamination anchors,	3 years	No	No	No	
Rotator	2 years	No	No	No	
Liners					
Keasy	2 years	No	No	No	Small defects of appearance are inherent to Keasy and not covered by warranty.
Silicone Liners Stepline, Stepwell	1 year	No	No	No	
Gel Liners Stepline Plus	6 months	No	No	No	
Stump Socks Silosheath	3 months	No	No	No	
Orthotics					
Straps					
2X	6 months	No	No	No	
Articulations					
KIT ODRA	1 year	No	No	no	Lining and finishing's wear is a normal wear and is not covered by the warranty
Fabrication Materials					
Chemical Products					
All products	3 months	No	No	No	Claims are admissible if the storage conditions and implementation are met.
Others products					
All products	2 years	No	No	No	Claims are admissible if the storage conditions and implementation are met.

### TERMS OF SALE (Components and materials)

The Seller hereinafter referred to is PROTEOR SAS, registered with the RCS of Dijon under Nr 542 083 704, whose head office is located at 6 rue de la Redoute, 21850 Saint Apollinaire, France. The Buyer or Customer hereinafter referred to is a professional, Customer of the Seller. The Goods or the Product is the subject of the order, either it appears in the Seller's catalog-price list, or it is manufactured on request according to an estimate.

#### ORDERS

1. Unless express dispensation, each order of Goods placed by the Buyer implies express acceptance, without reservation, of these terms of sale that take precedence over any other document, including all terms of purchase of the Purchaser or any statement on its own purchase orders, except under special conditions subject to express agreement.

2. Orders must be confirmed in writing by the Customer, complete and clearly specified in all details. Sending the order constitutes for the Buyer the firm and irrevocable commitment to accept the delivery of the ordered Goods and to make full payment. Delivery date is understood as meaning after all technical and commercial details, as well as delivery terms, are finalized by the Seller.

3. Unless otherwise stated, the offers of the Seller are valid for one month (30 working days), three months (90 working days) for export, after submission. If the Buyer's acceptance fails to comply fully with the offer or estimate, the agreement is only deemed to be made after written agreement is received from the Buyer. The Seller reserves the right to refuse any order that it considers to have abnormal features. Any alteration requiring further studies or a change in supply may entail a change in the price or delivery date. Drawings, documents and studies provided by the Seller to the Buyer remain the Seller's property and may not, without formal express authorization, be disclosed to third parties or used by third parties for production purposes. These drawings, documents and other studies shall be returned to the Seller if the order is not concluded.

4. If the Buyer wishes to cancel an order or a part of an order, it shall formulate it in writing. The Seller informs the Buyer in writing of whether or not this cancellation is possible, depending on the progress of this order. In the event of cancellation of the order, the indemnity due is based on the state of progress of the design and manufacture of the Goods.

#### DECISIVE CONDITION FOR THE SELLER

The Seller has agreed to sell to the Customer because of the payment guarantees granted. Would these guarantees change significantly, the Seller reserves the possibility either to cancel any agreement with the Customer, or to suspend this agreement until the provision of additional financial guarantees.

#### PRICE

The prices of the Seller are net, excluding taxes, transport and packaging costs; ex-work for France; carriage unpaid for DOM-TOM (French overseas departments and territories) and export (Incoterms 2010), unless otherwise stated. They are calculated on the basis of purchasing terms granted by Supplier and may be altered at any time without notice in response to changes in the costs of raw materials, cost schedule structures of suppliers or the exchange rate, within the scope of the legislation in force.

#### PAYMENT

Goods are billed according to the price list in force as of the delivery date or according to the estimate. Payment is made to the address of the Seller specified on the invoice, settlement at thirty days end-of-month, preferably by bank transfer to the account indicated by the Seller. No discount will be granted for anticipated payment. The making out of drafts does not constitute a dispensation or substitution for payment. The first delivery is made cash or cash on delivery. For export, payment shall be made in Dijon by irrevocable documentary credit confirmed by a French bank (according to UCP600 currently applicable), payable at sight, unless otherwise agreed by PROTEOR. The costs of documentary credit will be borne by the drawee. Any delay in payment will entail as of right a delay penalty calculated by applying to the due amount the legal interest rate of the European Central Bank multiplicated by 3. This penalty does not hinder the repayability of the debt and no notice of demand is required, the debtor being considered as such by simple occurrence of the due date. The lump sum compensation for costs of recovery shall be due. Failure to pay at a settlement date means that any subsequent payments become payable immediately. The last above-mentioned provision does not apply in the case of a partially contested invoice, provided that it has been acknowledged as justified for the extra amount. In the event of

PROTEOR

late payment that cannot be ascribed to an act of God or failure on the part of the Supplier, the corresponding exchange loss and late payment interest shall be borne by the Customer. In the event of billing in foreign currencies, the exchange loss shall be borne by the Customer.

SPD-00724 rev 0

#### DELIVERY

1. Agreed delivery dates are given as a guide only. They do not constitute a definite commitment and possible delivery delays cannot entail cancellation of the sale, refusal of the Goods, penalties or damages.

2. a) Deliveries in France: delivery is always deemed to be made at our warehouses. Dispatch is made carriage payment advanced. Goods are carried at the addressee's risk. The Customer is therefore responsible for guaranteeing its rights and complying with article L.133-3 of the French Commercial Code by declaring any claim within three days to the carrier.

b) For DOM-TOM (French overseas departments and territories) and for export, delivery is made carriage unpaid (Incoterms 2010), unless otherwise specified.

3. The Manufacturer reserves the right to make partial deliveries with the corresponding invoices; any partial delivery shall be regarded as a separate contract and consequently the Buyer may under no circumstances claim to be waiting for the remainder of the ordered Goods to defer the corresponding payment.

4. The Manufacturer is released from its delivery obligation for reasons of Act of God within the meaning of article 1218 of the Civil Code. Moreover any event beyond the control of the Seller may lead, at its request, to either an extension of time for order completion or the cancellation of the order, and release the Seller from any payment of damages.

5. If, as a result of any action by the Customer, delivery cannot be made at the planned date, the Seller reserves the right to use the Goods, or if the order involves special purpose production to pass on the handling and storage costs at the rate of 1.5 % per month of delay from the date specified in the order.

#### RETENTION OF PROPERTY

The Seller expressly reserves ownership of the Goods delivered until full payment of the price in principal and interest, wherever they are, including the Customer's stores, warehouses or personal accommodation; the risks being transferred to the Customer as soon as the Goods are taken over for sales in France. For sales outside France, the transfer of risk is defined by the Incoterm 2010 chosen. This retention of title is enforceable against creditors and liquidator agents in the event of receivership or judicial liquidation of the Customer.

Unpaid Goods shall be returned to the Seller at the expense and risk of the Customer, 10 days after the formal notice to pay by registered letter with acknowledgment of receipt has remained without effect.

#### **GENERAL WARRANTY** (professionals)

The Products should be used for the purpose they are intended to, and not for any other. The Seller cannot be held liable for any use of the Products that fails to comply with the Seller's instructions. The warranty is limited to replacement or repair in the Seller's workshops of the part recognized as defective and will never include any compensatory indemnity or reimbursement of assembly or transportation costs. Transportation costs in connection with the implementation of the warranty, both out-and-return, shall be borne by the Purchaser. The warranty does not cover replacements or repairs resulting from normal wear and tear of the Goods, damage or accidents caused by negligence, lack of care and supervision, inadequate storage conditions, nonconforming installation, or failure to adhere to the instructions for care and use. The warranty is void if the Goods is altered or repaired without the Seller's agreement. Replacement, alteration or repair of parts during the warranty period shall not extend the Goods are accepted within height working days from the date the Goods are received.

#### REPAIR

Repairs in the Seller's workshops shall be carried out at the fairest price and shall be subject to a repair agreement based on an estimate provided by the Seller. Labour and out-and-return carriage charges are borne by the Customer. Goods sent back from abroad for repair must be sent under temporary transit.

#### **RETURN - EXCHANGE**

Return of Goods are possible on an exceptional basis only, after prior written agreement from the Seller, for Goods in as-new condition, in their original packaging and that were delivered within the previous fifteen days. No return will be valid without the prior written consent of the Seller. Goods must be returned carriage and packaging paid, indicating the number and date of the delivery note and only for a subsequent exchange of Goods. However, Goods of a special order cannot be exchanged or returned. The Seller cannot be held liable for handling or storage that is not adapted to the packaging provided.

#### JURISDICTION

In the event of a dispute arising from the execution or interpretation of these Terms of Sales, and in the absence of an amicable settlement, the courts of DIJON, ruling under French law, have sole jurisdiction whatever the terms of sale and means of payment accepted, even in case of accessory claim, claim for contribution from third party or several defendants.

